



Public Authority for Civil Aviation

# **CAR - 139**

## **Civil Aviation Regulation**

### **Aerodrome Certification, Design and Operation**

#### **Part - 1**

Copyright © 2018 by the Public Authority of Civil Aviation (PACA), Oman  
All rights reserved. No part of this publication may be stored in a retrieval system, transmitted, or reproduced in any way, including but not limited to photo-copy, magnetic or other record, without the prior agreement and written permission of the CEO, for PACA, Oman

مكتب الرئيس التنفيذي  
Office of the Chief Executive Officer



## **PUBLIC AUTHORITY FOR CIVIL AVIATION**

**(Issued under CAL, Article 4)**

Reference No: 1/1.2/1

DATE: 29<sup>th</sup> May 2018

Pursuant to Article 4 section (g) of the Civil Aviation Law that was issued under the Royal Decree No. (93/2004), the Public Authority for Civil Aviation, shall have the power to "issue the necessary rules and instructions for regulating civil aviation according to national and international standards".

Accordingly, the Public Authority for Civil Aviation hereby issue CAR 139 Part I - AERODROMES CERTIFICATION, DESIGN and OPERATION and Part II- HELIPORTS/WATER AERODROMES for implementation.

**HE Dr. Mohammed bin Nasser Al Zaabi**  
Chief Executive Officer



---

## FOREWORD

In accordance with Royal Decree No (93/2004), to issue Civil Aviation Law, the Minister of Transport and Communications has been delegated the CAA to issue executive regulations pertaining to the Civil Aviation Law.

The provisions of the Civil Aviation Law apply to:

- (a) Civil aircraft in the territory of the Sultanate;
- (b) Civil Aircraft registered in the Sultanate, wherever that may be, in so much as there is no conflict with the provisions of the laws of the foreign state where the aircraft operates; and
- (c) Civil Aerodromes in the Sultanate and all works that may take place thereon.

The Public Authority for Civil Aviation, established by Royal Decree number 33/2012, dated 26<sup>th</sup> May 2012, is authorized by Civil Aviation Law Article 1 to regulate aerodromes to the standards set out in Civil Aviation Regulations, Rule 139, including carrying out the following tasks as they relate to Aerodromes:

- (a) Construct, determine types of, operate and run civil Aerodromes, grant certificates to run, operate and invest in such Aerodromes;
- (b) Construct, operate and manage air navigation aids, meteorological and air traffic services in the Sultanate;
- (c) Supervise and regulate any party or associated service providers entrusted with running and operating civil Aerodromes in the Sultanate;
- (d) Coordination with the relevant parties service providers to ensure the safe operation of Aerodromes in the Sultanate;
- (e) Issue, revoke and transfer the certificate of an Aerodrome and the certificate of an Operator, issue any other certificates or permits it deems necessary, after coordinating with the competent parties;
- (f) Issue instructions, publications and directives associated with civil Aerodromes which shall be in agreement with national and international laws and regulations, and make certain of the ability and specialization of Aerodromes Operators in their management of Aerodromes, to guarantee the safe operation of the aircraft;
- (g) Supervise and regulate the work of Aerodromes Operators, in which case it may look directly into violations and take the necessary measures with regard to the administrative violations;
- (h) Levy charges on certificates it issues and on services provided for Aerodromes Operators;
- (i) Supervise all Aerodromes 'staff regardless of the identity of their employee, to ensure no breach of regulations or instructions, and the proper running of Aerodromes, for

- that it may investigate and take the necessary measures;
- (j) Approve technical staff to guarantee their efficiency to work at Aerodromes, after coordinating with the Ministry of Civil Service; and
  - (k) Secure the safety of aviation and guard against exposing the citizens, their property and public property to any danger as a result of any failure in regulating flight operations or air traffic control in the Territory of the Sultanate.

The Civil Aviation Law defines the operation and use of Aerodromes in the Sultanate of Oman, in particular:

Article 5	Legal Nature of Airports
Article 6	Air Easement Rights
Article 7	Restrictions Regarding Areas of Air Easement
Rights Article 8	Expropriation of Real Property
Article 11	Securing the Safe Operations of Navigational Aid
Article 12	Protection of Airports and Navigational Aids
Article 27	Noise Level
Article 86	Determining Charges
Article 87	Collection of Charges
Article 91	Incidents of National Aircraft
Article 101	Mandatory Assistance When Requested
Article 102	Search and Rescue
Article 118	Criminal Offences against the Safety of Civil Aviation
Article 128	Powers of Civil Aviation PACA in relation to Violations
Article 131	Imprisonment and Fines
Article 132	Imprisonment up to Five Years

The provisions of the Chicago Convention and the Convention of Montreal of 1999, and the related international treaties and agreements, to which the Sultanate is a party, are considered complimentary to the Civil Aviation Law. In case of conflict, the provisions of the international treaties and agreements shall prevail. In the context of aerodromes, Article 28 of the Convention requires that a member state, so far as it may find practicable, to:

- a) Provide, in its territory, airports ..... in accordance with the standards and practices recommended or established from time to time, pursuant to this Convention;

- b) Adopt and put into operation the appropriate standard systems of communications procedure, codes, markings, signals, lighting and other operational practices and rules which may be recommended or established from time to time, pursuant to this Convention;
- c) Collaborate in international measures to secure the publication of aeronautical maps and charts in accordance with standards which may be recommended or established from time to time, pursuant to this Convention.

CAR139 prescribes the detailed technical specifications (aerodrome safety standards) that are determined to be necessary for the safety of air navigation, and contains specifications which are in compliance with the Standards and Recommended Practices of Annex 14 to the Convention on International Civil Aviation. It provides the standards required by the current CAR139 for land use, and specifications dealing with obstacles relevant to the obstacle limitation surfaces in the vicinity of aerodromes.

All aerodrome operators, aerodrome service providers, aerodrome design and construction organizations, training organizations and or any other organization determined by the Public Authority of Civil Aviation shall abide by the regulations set out in CAR 139.

The appendices and circulars comprise material grouped separately form part of this Part. The definitions of terms and abbreviations used in this publication are those that are not self-explanatory in that they do not have accepted dictionary meanings, or have specific aeronautical meanings when used in context. A definition does not have independent status but is an essential part of each division or subdivision in which the term is used, since a change in the meaning of the term would affect the specification. Wherever possible, ICAO terminology and abbreviations are used for both consistency and comprehension by not native English speakers. Tables and Figures which add to or illustrate any publication content and which are referred to therein, form part of the associated division or subdivision and have the same status. Any reference to a portion of this publication, which is identified by a number and/or title, includes all subdivisions of that portion.

**RECORD OF AMENDMENTS**

Revision Number	Date	Entered by
Amendment 13A of Annex 14	Incorporated in this Edition	
Amendment 14 of Annex 14	Incorporated in this Edition	

## Table of Contents

FOREWORD .....	3
RECORD OF AMENDMENTS .....	6
Table of Contents .....	7
ABBREVIATIONS AND SYMBOLS.....	15
PUBLICATIONS.....	16
CHAPTER 1- GENERAL .....	18
1.1 Definitions.....	18
1.2 Applicability.....	30
1.3 Common reference systems .....	30
1.3.1 Horizontal reference system.....	30
1.3.2 Vertical reference system .....	30
1.3.3 Temporal reference system .....	30
1.4 Certification of aerodromes.....	31
1.5 Airport design.....	32
1.6 Reference code .....	32
1.7 Specific Procedures for Aerodrome Operations .....	33
CHAPTER 2 - AERODROME DATA .....	35
2.1 Aeronautical data.....	35
2.2 Aerodrome reference point.....	36
2.3 Aerodrome and runway elevations .....	36
2.4 Aerodrome reference temperature.....	36
2.5 Aerodrome dimensions and related information .....	36
2.6 Strength of pavements .....	38
2.7 Pre-flight altimeter check location.....	41
2.8 Declared distances .....	41
2.9 Condition of the movement area and related facilities.....	41
2.10 Disabled aircraft removal.....	43
2.11 Rescue and firefighting .....	44
2.12 Visual approach slope indicator systems .....	44
2.13 Coordination between aeronautical information services and aerodrome authorities .....	45

---

CHAPTER 3 -	PHYSICAL CHARACTERISTICS .....	47
3.1	Runways .....	47
3.2	Runway shoulders .....	54
3.3	Runway turn pads .....	55
3.4	Runway strips .....	57
3.5	Runway end safety areas .....	60
3.6	Clearways .....	62
3.7	Stopways .....	63
3.8	Radio altimeter operating area .....	64
3.9	Taxiways .....	64
3.10	Taxiway shoulders .....	70
3.11	Taxiway strips .....	71
3.12	Holding bays, runway-holding positions, intermediate holding positions and road-holding positions .....	73
3.13	Aprons .....	75
3.14	Isolated aircraft parking position .....	76
CHAPTER 4 -	OBSTACLE RESTRICTION AND REMOVAL .....	78
4.1	Obstacle limitation surfaces .....	79
4.2	Obstacle limitation requirements .....	85
4.3	Objects outside the obstacle limitation surfaces .....	91
4.4	Other objects .....	91
4.5	Obstacle charts and other requirements .....	91
CHAPTER 5 -	VISUAL AIDS FOR NAVIGATION .....	94
5.1	Indicators and signalling devices .....	94
5.1.1	Wind direction indicator .....	94
5.1.2	Landing direction indicator .....	94
5.1.3	Signalling lamp .....	95
5.1.4	Signal panels and signal area .....	96
5.2	Markings .....	96
5.2.1	General .....	96
5.2.2	Runway designation marking .....	97

---



5.2.3	Runway centre line marking .....	99
5.2.4	Threshold marking .....	100
5.2.5	Aiming point marking.....	103
5.2.6	Touchdown zone marking.....	104
5.2.7	Runway side stripe marking.....	105
5.2.8	Taxiway centre line marking .....	107
5.2.9	Runway turn pad marking.....	111
5.2.10	Runway-holding position marking .....	111
5.2.11	Intermediate holding position marking .....	113
5.2.12	VOR aerodrome checkpoint marking.....	114
5.2.13	Aircraft stand marking .....	115
5.2.14	Apron safety lines .....	116
5.2.15	Road-holding position marking.....	118
5.2.16	Mandatory instruction marking.....	118
5.2.17	Information marking .....	120
5.3	Lights .....	121
5.3.1	General.....	121
5.3.2	Emergency lighting.....	126
5.3.3	Aeronautical beacons.....	126
5.3.4	Approach lighting systems .....	128
5.3.5	Visual approach slope indicator systems .....	137
5.3.6	Circling guidance lights .....	152
5.3.7	Runway lead-in lighting systems.....	153
5.3.8	Runway threshold identification lights .....	153
5.3.9	Runway edge lights .....	154
5.3.10	Runway threshold and wing bar lights (see Figure 5-22).....	155
5.3.11	Runway end lights (see Figure 5-22).....	159
5.3.12	Runway centre line lights.....	159
5.3.13	Runway touchdown zone lights .....	162
5.3.14	Simple touchdown zone lights .....	162
5.3.15	Rapid exit taxiway indicator lights .....	164

5.3.16	Stopway lights .....	166
5.3.17	Taxiway centre line lights.....	166
5.3.18	Taxiway edge lights .....	172
5.3.19	Runway turn pad lights .....	173
5.3.20	Stop bars .....	173
5.3.21	Intermediate holding position lights.....	175
5.3.22	De-icing/anti-icing facility exit lights: N/A .....	176
5.3.23	Runway guard lights.....	176
5.3.24	Apron floodlighting (See also 5.3.17.1 and 5.3.18.1).....	179
5.3.25	Visual docking guidance system.....	179
5.3.26	Advanced visual docking guidance system .....	182
5.3.27	Aircraft stand manoeuvring guidance lights .....	184
5.3.28	Road-holding position light.....	185
5.3.29	No-entry bar.....	186
5.3.30	Runway status lights .....	187
5.4	Signs .....	188
5.4.1	General.....	188
5.4.2	Mandatory instruction signs .....	191
5.4.3	Information signs .....	195
5.4.4	VOR aerodrome checkpoint sign .....	198
5.4.5	Aerodrome identification sign .....	200
5.4.6	Aircraft stand identification signs .....	200
5.4.7	Road-holding position sign.....	200
5.5	Markers .....	202
5.5.1	General.....	202
5.5.2	Unpaved runway edge markers .....	202
5.5.3	Stopway edge markers.....	203
5.5.4	Edge Markers for snow-covered runways- NA .....	203
5.5.5	Taxiway edge markers.....	203
5.5.6	Taxiway centre line markers .....	203
5.5.7	Unpaved taxiway edge markers.....	204

---

5.5.8	Boundary markers.....	204
CHAPTER 6 -	VISUAL AIDS FOR DENOTING OBSTACLES .....	206
6.1	Objects to be marked and/or lighted .....	206
6.1.1	Objects within the lateral boundaries of the obstacle limitation surfaces.....	206
6.1.2	Objects outside the lateral boundaries of the obstacle limitation surfaces.....	208
6.2	Marking and /or lighting of objects .....	208
6.2.1	General.....	208
6.2.2	Mobile Object.....	208
6.2.3	Fixed Objects.....	212
6.2.4	Wind turbines.....	219
6.2.5	Overhead wires, cables, etc., and supporting towers.....	220
CHAPTER 7 -	VISUAL AIDS FOR DENOTING RESTRICTED USE AREAS .....	223
7.1	Closed runways and taxiways, or parts thereof.....	223
7.2	Non-load-bearing surfaces.....	224
7.3	Pre-threshold area .....	226
7.4	Unserviceable areas .....	227
CHAPTER 8 -	ELECTRICAL SYSTEMS .....	228
8.1	Electrical power supply systems for air navigation facilities .....	228
8.2	System design .....	231
8.3	Monitoring .....	231
CHAPTER 9.	AERODROME OPERATIONAL SERVICES, EQUIPMENT AND INSTALLATIONS .....	233
9.1	Aerodrome emergency planning .....	233
9.2	Rescue and fire fighting .....	237
9.3	Disabled aircraft removal.....	247
9.4	Wildlife strike hazard reduction.....	247
9.5	Apron management service.....	248
9.6	Ground servicing of aircraft .....	249
9.7	Aerodrome vehicle operations .....	249
9.8	Surface movement guidance and control systems.....	250
9.9	Siting of equipment and installations on operational areas.....	251
9.10	Fencing .....	253

---

---

9.11	Security lighting.....	253
9.12	Autonomous runway incursion warning system .....	254
9.13	Airside Safety Committee / Runway Safety Team .....	255
CHAPTER 10 - AERODROME MAINTENANCE .....		256
10.1	General.....	256
10.2	Pavements.....	256
10.3	Removal of contaminants .....	258
10.4	Runway pavement overlays .....	258
10.5	Visual aids .....	259
CHAPTER 11 - AERODROME CERTIFICATION / OPERATOR OBLIGATION / USE OF AERODROMES .....		263
11.1	Application for Aerodrome Certificate .....	263
11.2	Issuance of Aerodrome Certificate .....	263
11.3	Transfer of Aerodrome Certificate.....	264
11.4	Interim Aerodrome Certificate .....	265
11.5	Amendment and Cancellation of Aerodrome Certificate .....	265
11.6	Duration of certificate.....	266
11.7	Renewal of certificate .....	266
11.8	Exemptions.....	266
11.9	Deviations .....	267
11.10	Preparation of the aerodrome manual.....	267
11.11	Location of the aerodrome manual .....	267
11.12	Information to be included in the aerodrome manual.....	268
11.13	Information reporting .....	268
11.14	Amendment of the aerodrome manual.....	268
11.15	Notification of changes to the aerodrome manual .....	268
11.16	Acceptance and approval of the Aerodrome.....	268
11.17	Obligations of Aerodrome Operator.....	268
11.18	Notification of aviation occurrence on an aerodrome.....	271
11.19	Warning Notices.....	272
11.20	Prohibitions .....	272
11.21	Fire Prevention.....	273

---

---

11.22	Rain and Flood Control.....	273
11.23	Charges.....	274
11.24	Compliance with CAR139 .....	274
11.25	Use of Aerodrome.....	275
CHAPTER 12 -	PARTICULARS TO BE INCLUDED IN AN AERODROME MANUAL.....	278
12.1	ADMINISTRATION PROCEDURE FOR THE AERODROME MANUAL .....	278
12.2	PARTICULARS OF THE AERODROME SITE.....	280
12.3	PARTICULARS OF THE AERODROME REQUIRED TO BE REPORTED TO AERONAUTICAL INFORMATION SERVICES (AIS) .....	280
12.4	PARTICULARS OF THE AERODROME OPERATING PROCEDURES AND SAFETY MEASURES .....	283
12.5	AERODROME ADMINISTRATION.....	291
12.6	AERODROME SAFETY MANAGEMENT SYSTEM .....	292
CHAPTER 13 -	CERTIFICATION OF TRAINING ORGANISATIONS .....	294
13.1	Introduction .....	294
13.2	Eligibility .....	294
13.3	Application for certificate issuance or amendment.....	295
13.4	Issue of and duration of certificate .....	296
13.5	Certification Requirements .....	296
13.6	Instructor requirements.....	297
13.7	Facilities, equipment, and material requirements.....	297
13.8	Documentation .....	298
13.9	Operating Rules.....	298
13.10	Records.....	298
13.11	Transcripts and graduation certificates .....	299
13.12	Maintenance of instructor requirements .....	299
13.13	Maintenance of facilities, equipment and material.....	299
13.14	Maintenance of curriculum requirements.....	299
13.15	Quality of Instruction .....	300
13.16	Display of certificate .....	300
13.17	Change of location .....	300
13.18	Audit and Inspection .....	300

---

---

13.19 Advertising .....	301
APPENDICES .....	302
APPENDIX 1. COLOURS FOR AERONAUTICAL GROUND LIGHTS, MARKINGS, SIGNS AND PANELS .....	303
APPENDIX 2. AERONAUTICAL GROUND LIGHT CHARACTERISTICS.....	316
APPENDIX 3. MANDATORY INSTRUCTION MARKINGS AND INFORMATION MARKINGS .....	344
APPENDIX 4. REQUIREMENTS CONCERNING DESIGN OF TAXIING GUIDANCE SIGNS.....	349
APPENDIX 5. LOCATION OF LIGHTS ON OBSTACLES .....	360
ATTACHMENTS.....	368
ATTACHMENT A. GUIDANCE MATERIAL SUPPLEMENTARY TO CAR 139 – Part 1. ....	369
ATTACHMENT B. OBSTACLE LIMITATION SURFACES .....	408
ATTACHMENT C. APPLICATION FOR AERODROME CERTIFICATE .....	409
ATTACHMENT D. CAR139 AERODROME CERTIFICATION COMPLIANCE CHECKLIST.....	411
ATTACHMENT E. BIRD STRIKE REPORTING FORM .....	507

## ABBREVIATIONS AND SYMBOLS

(Used in CAR 139 – Aerodromes)

### Abbreviations

ACN	Aircraft classification number	OCA/H	Obstacle clearance altitude/height
APAPI	Abbreviated precision approach path indicator	OFZ	Obstacle free zone
aprx	Approximately	OLS	Obstacle limitation surface
ASDA	Accelerate-stop distance available	OMGWS	Outer main gear wheel span
ATS	Air traffic services	PACA	Public Authority for Civil Aviation
AT-VASIS	Abbreviated T visual approach slope indicator system	PAPI	Precision approach path indicator
C	Degree Celsius	PCN	Pavement classification number
CBR	California bearing ratio	PTB	Passenger terminal building
cd	Candela	RESA	Runway end safety area
CIE	Commission Internationale de l'Éclairage	RST	Runway Safety Team
cm	Centimetre	RVR	Runway visual range
DME	Distance measuring equipment	TODA	Take-off distance available
ft	Foot	TORA	Take-off run available
ILS	Instrument landing system	T-VASIS	T visual approach slope indicator system
IMC	Instrument meteorological conditions	VMC	Visual meteorological conditions
K	Degree Kelvin	VOR	Very high frequency omnidirectional radio range
kg	Kilogram		
km	Kilometre		
km/h	Kilometre per hour		
kt	Knot		
L	Litre		
LDA	Landing distance available		
m	Metre		
max	Maximum		
MLS	Microwave landing system		
mm	Millimetre		
mm	Minimum		
MN	Meganewton		
MOWP	Method of work plan		
MPa	Megapascal		
N/A	Not applicable		
NM	Nautical mile		
NU	Not usable		

### Symbols

°	Degree
=	Equals
· □	Minute of arc
μ	Friction coefficient
>	Greater than
<	Less than
%	Percentage
±	Plus

---

## PUBLICATIONS

### ICAO and other Publications to be used for cross-reference with CAR 139–Aerodromes

Annex 14 – Volume 1- Aerodrome Design and Operations

Advanced Surface Movement Guidance and Control Systems (A-SMGCS) Manual (Doc 9830)

Aerodrome Manual Template (prepared by COSCAP—South Asia/ICAO) adopted by PACA

Aerodrome Design Manual (Doc 9157)

**Part 1** — Runways

**Part 2** — Taxiways, Aprons and Holding Bays

**Part 3** — Pavements

**Part 4** — Visual Aids

**Part 5** — Electrical Systems

**Part 6** — Frangibility

Aeronautical Information Services Manual (Doc 8126)

Aircraft Type Designators (Doc 8643)

Airport Planning Manual (Doc 9184)

**Part 1** — Master Planning

**Part 2** — Land Use and Environmental Control

**Part 3** — Guidelines for Consultant/Construction Services

Airport Services Manual (Doc 9137)

**Part 1** — Rescue and Fire Fighting

**Part 2** — Pavement Surface Conditions

**Part 3** — Wildlife Control and Reduction

**Part 5** — Removal of Disabled Aircraft

**Part 6** — Control of Obstacles

**Part 7** — Airport Emergency Planning

**Part 8** — Airport Operational Services

**Part 9** — Airport Maintenance Practices

Air Traffic Services Planning Manual (Doc 9426)

Airworthiness Manual (Doc 9760)

Volume I — Organization and Procedures

Volume II — Design Certification and Continuing Airworthiness

CAR 100 – Safety Management System

Guidance on the Balanced Approach to Aircraft Noise Management (Doc 9829)

Heliport Manual (Doc 9261)

ICAO ANNEX 1 to 19



Human Factors Training Manual (Doc 9683)

Manual of Aircraft Ground De-icing/Anti-icing Operations (Doc 9640)

Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476)

Manual on Certification of Aerodromes (Doc 9774)

Manual on Laser Emitters and Flight Safety (Doc 9815)

Manual on Simultaneous Operations on Parallel or Near-Parallel Instrument Runways (SOIR) (Doc 9643)

Manual on the ICAO Bird Strike Information System (IBIS) (Doc 9332)

Procedures for Air Navigation Services — Aerodromes (PANS-AERODROMES) (Doc 9981)

Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS) (Doc 8168)

Volume I — Flight Procedures

Volume II — Construction of Visual and Instrument Flight Procedures

Procedures for Air Navigation Services — Air Traffic Management (PANS-ATM) (Doc 4444)

Safety Management Manual (SMM) (Doc 9859)

Stolport Manual (Doc 9150)

World Geodetic System — 1984 (WGS-84) Manual (Doc 9674)

Procedures for Air Navigation Services — Aeronautical Information Management (PANS-AIM) (Doc 10066)

## CHAPTER 1- GENERAL

### 1.1 Definitions

When the following terms are used in this **DOCUMENT** they have the following meanings:

**Aerodrome.** A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.

**Aerodrome beacon.** Aeronautical beacon used to indicate the location of an aerodrome from the air.

**Aerodrome certificate.** A certificate issued by the Public Authority for Civil Aviation under applicable regulations for the operation of an aerodrome.

**Aerodrome elevation.** The elevation of the highest point of the landing area.

**Aerodrome Facilities and Equipment.** Facilities and equipment inside or outside the boundaries of an aerodrome that are constructed or installed and maintained for the arrival, departure and surface movement of aircraft.

**Aerodrome identification sign.** A sign placed on an aerodrome to aid in identifying the aerodrome from the air.

**Aerodrome mapping data (AMD).** Data collected for the purpose of compiling aerodrome mapping information for aeronautical uses.

***Note:*** Aerodrome mapping data are collected for purposes that include the improvement of the user's situational awareness, surface navigation operations, training, charting and planning.

**Aerodrome mapping database (AMDB).** A collection of aerodrome mapping data organized and arranged as a structured data set.

**Aerodrome reference point.** The designated geographical location of an aerodrome.

**Aerodrome traffic density:**

**Light-** Where the number of movements in the mean busy hour is not greater than 15 per runway or typically less than 20 total aerodrome movements.

**Medium-** Where the number of movements in the mean busy hour is of the order of 16 to 25 per runway or typically between 20 to 35 total aerodrome movements.

**Heavy-** Where the number of movements in the mean busy hour is of the order of 26 or more per runway or typically more than 35 total aerodrome movements.

**Note 1:** *The number of movements in the mean busy hour is the arithmetic mean over the year of the number of movements in the daily busiest hour.*

**Note 2:** *Either a take-off or a landing constitutes a movement.*

**Aeronautical beacon.** An aeronautical ground light visible at all azimuths, either continuously or intermittently, to designate a particular point on the surface of the earth.

**Aeronautical ground light.** Any light specially provided as an aid to air navigation, other than a light displayed on an aircraft.

**Aeroplane reference field length.** The minimum field length required for take-off at maximum certificated take-off mass, sea level, standard atmospheric conditions, still air and zero runway slope, as shown in the appropriate aeroplane flight manual prescribed by the certificating authority or equivalent data from the aeroplane manufacturer. Field length means balanced field length for aeroplanes, if applicable, or take-off distance in other cases.

**Note:** *Attachment A, Section 2, provides information on the concept of balanced field length and the Airworthiness Manual (Doc 9760) contains detailed guidance on matters related to take-off distance.*

**Aircraft classification number (ACN).** A number expressing the relative effect of an aircraft on a pavement for a specified standard subgrade category.

**Note:** *The aircraft classification number is calculated with respect to the centre of gravity (CG) position which yields the critical loading on the critical gear. Normally the aftmost CG position appropriate to the maximum gross apron (ramp) mass is used to calculate the ACN. In exceptional cases the forward most CG position may result in the nose gear loading being more critical.*

**Aircraft stand.** A designated area on an apron intended to be used for parking an aircraft.

**Apron.** A defined area, on a land aerodrome, intended to accommodate aircraft for purposes of loading or unloading passengers, mail or cargo, fuelling, parking or maintenance.

**Apron management service.** A service provided to regulate the activities and the movement of aircraft and vehicles on an apron.

**Arresting System.** A system designed to decelerate an aeroplane overrunning the runway.

**Autonomous runway incursion warning system (ARIWS).** A system which provides autonomous detection of a potential incursion or of the occupancy of an active runway and a direct warning to a flight crew or a vehicle operator.

**Balked landing.** A landing manoeuvre that is unexpectedly discontinued at any point below the obstacle clearance altitude/height (OCA/H).

**Barrette.** Three or more aeronautical ground lights closely spaced in a transverse line so that from a distance they appear as a short bar of light.

**Calendar.** Discrete temporal reference system that provides the basis for defining temporal position to a resolution of one day (ISO 19108\*).

**Certified aerodrome.** An aerodrome whose operator has been granted an aerodrome certificate by the Public Authority for Civil Aviation

**Clearway.** A defined rectangular area on the ground or water under the control of the appropriate authority, selected or prepared as a suitable area over which an aeroplane may make a portion of its initial climb to a specified height.

**Cyclic redundancy check (CRC).** A mathematical algorithm applied to the digital expression of data that provides a level of assurance against loss or alteration of data.

**Data accuracy.** A degree of conformance between the estimated or measured value and the true value.

**Data quality.** A degree or level of confidence that the data provided meet the requirements of the data user in terms of accuracy, resolution and integrity (or equivalent assurance level), traceability, timeliness, completeness and format.

**Datum.** Any quantity or set of quantities that may serve as a reference or basis for the calculation of other quantities (ISO 19104\*\*).

**De-icing/anti-icing facility.** A facility where frost, ice or snow is removed (de-icing) from the aeroplane to provide clean surfaces, and/or where clean surfaces of the aeroplane receive protection (anti-icing) against the formation of frost or ice and accumulation of snow or slush for a limited period of time.

**Note:** Further guidance is given in the *Manual of Aircraft Ground De-icing/Anti-icing Operations (Doc 9640)*.

**De-icing/anti-icing pad.** An area comprising an inner area for the parking of an aeroplane to receive de-icing/anti-icing treatment and an outer area for the manoeuvring of two or more mobile de-icing/anti-icing equipment.

#### **Declared distances:**

- a) **Take-off run available (TORA)** - The length of runway declared available and suitable for the ground run of an aeroplane taking off.
- b) **Take-off distance available (TODA)** - The length of the take-off run available plus the length of the clearway, if provided.

- c) **Accelerate-stop distance available (ASDA)** - The length of the take-off run available plus the length of the stopway, if provided.
- d) **Landing distance available (LDA)** - The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

**Dependent parallel approaches.** Simultaneous approaches to parallel or near-parallel instrument runways where radar separation minima between aircraft on adjacent extended runway centre lines are prescribed.

**Displaced threshold.** A threshold not located at the extremity of a runway.

**Effective intensity.** The effective intensity of a flashing light is equal to the intensity of a fixed light of the same colour which will produce the same visual range under identical conditions of observation.

**Ellipsoid height (Geodetic height).** The height related to the reference ellipsoid, measured along the ellipsoidal outer normal through the point in question.

**Fixed light.** A light having constant luminous intensity when observed from a fixed point.

**Foreign Object Debris (FOD).** An inanimate object within the movement area which has no operational or aeronautical function and which has the potential to be a hazard to aircraft operations.

**Frangible object.** An object of low mass designed to break, distort or yield on impact so as to present the minimum hazard to aircraft.

***Note:** Guidance on design for frangibility is contained in the Aerodrome Design Manual (Doc 9157), Part 6.*

**Geodetic datum.** A minimum set of parameters required to define location and orientation of the local reference system with respect to the global reference system/frame.

**Geoid.** The equipotential surface in the gravity field of the Earth which coincides with the undisturbed mean sea level (MSL) extended continuously through the continents.

***Note:** The geoid is irregular in shape because of local gravitational disturbances (wind tides, salinity, current, etc.) and the direction of gravity is perpendicular to the geoid at every point.*

**Geoid undulation.** The distance of the geoid above (positive) or below (negative) the mathematical reference ellipsoid.

\* ISO Standard 19108, Geographic information — Temporal schema  
\*\* ISO Standard 19104, Geographic information — Terminology

**Note:** In respect to the World Geodetic System — 1984 (WGS-84) defined ellipsoid, the difference between the WGS-84 ellipsoidal height and orthometric height represents WGS-84 geoid undulation.

**Gregorian calendar.** Calendar in general use; first introduced in 1582 to define a year that more closely approximates the tropical year than the Julian calendar (ISO 19108<sup>\*\*\*</sup>).

**Note:** In the Gregorian calendar, common years have 365 days and leap years 366 days divided into twelve sequential months.

**Hazard beacon.** An aeronautical beacon used to designate a danger to air navigation.

**Heliport.** An aerodrome or a defined area on a structure intended to be used wholly or in part for the arrival, departure and surface movement of helicopters.

**Holding bay.** A defined area where aircraft can be held, or bypassed, to facilitate efficient surface movement of aircraft.

**Holdover time.** The estimated time the anti-icing fluid (treatment) will prevent the formation of ice and frost and the accumulation of snow on the protected (treated) surfaces of an aeroplane.

**Hot spot.** A location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

**Human Factors principles.** Principles which apply to aeronautical design, certification, training, operations and maintenance and which seek safe interface between the human and other system components by proper consideration to human performance.

**Human performance.** Human capabilities and limitations which have an impact on the safety and efficiency of aeronautical operations.

**Identification beacon.** An aeronautical beacon emitting a coded signal by means of which a particular point of reference can be identified.

**Independent parallel approaches.** Simultaneous approaches to parallel or near-parallel instrument runways where radar separation minima between aircraft on adjacent extended runway centre lines are not prescribed.

**Independent parallel departures.** Simultaneous departures from parallel or near-parallel instrument runways.

**Instrument runway.** One of the following types of runways intended for the operation of aircraft using instrument approach procedures:

- a. **Non-precision approach runway.** A runway served by visual aids and a non-visual aid(S) intended for landing operations following an instrument approach operation type A and a visibility not less than 1000m.

- b. Precision approach runway, category I.** A runway served by visual aids and non-visual aid(s) intended for operations following an instrument approach operation type B with a decision height (DH) not lower than 60 m (200 ft.) and either a visibility not less than 800 m or a runway visual range not less than 550 m.
- c. Precision approach runway, category II.** A runway served by visual aids and non-visual aid(s) intended for landing operations following and instrument approach type B with a decision height (DH) lower than 60 m (200 ft.) but not lower than 30 m (100 ft.) and a runway visual range not less than 300 m.
- d. Precision approach runway, category III.** A runway served by visual aids and non-visual aid(s) intended for landing operations following and instrument approach type B and along the surface of the runway and:
  - A. Intended for operations with a decision height (DH) lower than 30 m (100 ft), or no decision height and a runway visual range not less than 175 m.
  - B. Intended for operations with a decision height (DH) lower than 15 m (50 ft), or no decision height and a runway visual range less than 175 m but not less than 50m
  - C. Intended for operations with no decision height (DH) and no runway visual range limitations.

**Note 1:** *Visual aids need not necessarily be matched to the scale of non-visual aids provided. The criterion for the selection of visual aids is the conditions in which operations are intended to be conducted.*

**Note 2:** *Refer to Annex 6 for instrument approach operation types*

**Data integrity assurance level.** A degree of assurance that an aeronautical data and its value has not been lost nor altered since the data origination or authorized amendment.

**Integrity classification (aeronautical data).** Classification based upon the potential risk resulting from the use of corrupted data. Aeronautical data is classified as:

- a) **Routine data:** there is a very low probability when using corrupted routine data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe;
- b) **Essential data:** there is a low probability when using corrupted essential data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe; and
- c) **Critical data:** there is a high probability when using corrupted critical data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe.



**Intermediate holding position.** A designated position intended for traffic control at which taxiing aircraft and vehicles shall stop and hold until further cleared to proceed, when so instructed by the aerodrome control tower.

**Landing area.** That part of a movement area intended for the landing or take-off of aircraft.

**Landing direction indicator.** A device to indicate visually the direction currently designated for landing and for take-off.

**Laser-beam critical flight zone (LCFZ).** Airspace in the proximity of an aerodrome but beyond the LFFZ where the irradiance is restricted to a level unlikely to cause glare effects.

**Laser-beam free flight zone (LFFZ).** Airspace in the immediate proximity of the aerodrome where the irradiance is restricted to a level unlikely to cause any visual disruption.

**Laser-beam sensitive flight zone (LSFZ).** Airspace outside, and not necessarily contiguous with, the LFFZ and LCFZ where the irradiance is restricted to a level unlikely to cause flash-blindness or after-image effects.

**Lighting system reliability.** The probability that the complete installation operates within the specified tolerances and that the system is operationally usable.

**Manoeuvring area.** That part of an aerodrome to be used for the take-off, landing and taxiing of aircraft, excluding aprons.

**Marker.** An object displayed above ground level in order to indicate an obstacle or delineate a boundary.

**Marking.** A symbol or group of symbols displayed on the surface of the movement area in order to convey aeronautical information.

**Movement area.** That part of an aerodrome to be used for the take-off, landing and taxiing of aircraft, consisting of the manoeuvring area and the apron(s).

**Near-parallel runways.** Non-intersecting runways whose extended centre lines have an angle of convergence/divergence of 15 degrees or less.

**Non-instrument runway.** A runway intended for the operation of aircraft using visual approach procedures or an instrument approach procedure to a point beyond which the approach may continue in visual meteorological conditions.

**Note:** Visual meteorological conditions (VMC) are described in Chapter 3 of Annex 2.

**Normal flight zone (NFZ).** Airspace not defined as LFFZ, LCFZ or LSFZ but which must be protected from laser radiation capable of causing biological damage to the eye.

**Obstacle.** All fixed (whether temporary or permanent) and mobile objects, or parts thereof, that:

- a. Are located on an area intended for the surface movement of aircraft; or
- b. Extend above a defined surface intended to protect aircraft in flight; or
- c. Stand outside those defined surfaces and that have been assessed as being a hazard to air navigation.

**Obstacle free zone (OFZ).** The airspace above the inner approach surface, inner transitional surfaces, and balked landing surface and that portion of the strip bounded by these surfaces, which is not penetrated by any fixed obstacle other than a low-mass and frangibly mounted one required for air navigation purposes.

**Outer main gear wheel span (OMGWS).** The distance between the outside edges of the main gear wheels.

**Orthometric height.** Height of a point related to the geoid, generally presented as an MSL elevation.

**Pavement classification number (PCN).** A number expressing the bearing strength of a pavement for unrestricted operations.

**Precision approach runway,** see **Instrument runway.**

**Primary runway(s).** Runway(s) used in preference to others whenever conditions permit.

**Protected flight zones.** Airspace specifically designated to mitigate the hazardous effects of laser radiation.

**Road.** An established surface route on the movement area meant for the exclusive use of vehicles.

**Road-holding position.** A designated position at which vehicles may be required to hold.

**Runway.** A defined rectangular area on a land aerodrome prepared for the landing and take-off of aircraft.

**Runway Safety Team.** A team comprised of representatives from [the aerodrome operator], air traffic service providers, airlines or aircraft operators, pilot and air traffic controllers associations and any other group with a direct involvement in runway operations [at a specific aerodrome,] that advise the appropriate management on the potential runway [safety] issues and recommend mitigation strategies.

**Runway end safety area (RESA).** An area symmetrical about the extended runway centre line and adjacent to the end of the strip primarily intended to reduce the risk of damage to an aeroplane undershooting or overrunning the runway.

**Runway guard lights.** A light system intended to caution pilots or vehicle drivers that they are about to enter an active runway.

**Runway-holding position.** A designated position intended to protect a runway, an obstacle limitation surface, or an ILS/MLS critical/sensitive area at which taxiing aircraft and vehicles shall stop and hold, unless otherwise authorized by the aerodrome control tower.

***Note:*** In radiotelephony phraseologies, the expression “holding point” is used to designate the runway-holding position.

**Runway strip.** A defined area including the runway and stopway, if provided, intended:

- a) To reduce the risk of damage to aircraft running off a runway; and
- b) To protect aircraft flying over it during take-off or landing operations.

**Runway turn pad.** A defined area on a land aerodrome adjacent to a runway for the purpose of completing a 180-degree turn on a runway.

**Runway visual range (RVR).** The range over which the pilot of an aircraft on the centre line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line.

**Safety management system (SMS).** A systematic approach to managing safety including the necessary organizational structure, accountabilities, policies and procedures.

**Segregated parallel operations.** Simultaneous operations on parallel or near-parallel instrument runways in which one runway is used exclusively for approaches and the other runway is used exclusively for departures.

**Shoulder.** An area adjacent to the edge of a pavement so prepared as to provide a transition between the pavement and the adjacent surface.

**Sign.**

- a) **Fixed message sign** - A sign presenting only one message.
- b) **Variable message sign** - A sign capable of presenting several predetermined messages or no message, as applicable.

**Signal area.** An area on an aerodrome used for the display of ground signals.

**Slush.** Water-saturated snow which with a heel-and -toe slap-down motion against the ground will be displaced with a splatter; specific gravity: 0.5 up to 0.8.

***Note:*** Combinations of ice, snow and/or standing water may, especially when rain, rain and snow, or snow is falling, produce substances with specific gravities in excess of 0.8. These substances,

*due to their high water/ice content, will have a transparent rather than a cloudy appearance and, at the higher specific gravities, will be readily distinguishable from slush.*

**Snow (on the ground). Not Applicable to Oman**

- a) **Dry snow** - Snow which can be blown if loose or, if compacted by hand, will fall apart again upon release; specific gravity: up to but not including 0.35.
- b) **Wet snow** - Snow which, if compacted by hand, will stick together and tend to or form a snowball; specific gravity: 0.35 up to but not including 0.5.
- c) **Compacted snow** - Snow which has been compressed into a solid mass that resists further compression and will hold together or break up into lumps if picked up; specific gravity: 0.5 and over.

**Station declination.** An alignment variation between the zero degree radial of a VOR and true north, determined at the time the VOR station is calibrated.

**Stopway.** A defined rectangular area on the ground at the end of take-off run available prepared as a suitable area in which an aircraft can be stopped in the case of an abandoned take off.

**Switch-over time (light).** The time required for the actual intensity of a light measured in a given direction to fall from 50 per cent and recover to 50 per cent during a power supply changeover, when the light is being operated at intensities of 25 per cent or above.

**Take-off runway.** A runway intended for take-off only

**Taxiway.** A defined path on a land aerodrome established for the taxiing of aircraft and intended to provide a link between one part of the aerodrome and another, including:

- a) **Aircraft stand taxilane** - A portion of an apron designated as a taxiway and intended to provide access to aircraft stands only.
- b) **Apron taxiway** - A portion of a taxiway system located on an apron and intended to provide a through taxi-route across the apron.
- c) **Rapid exit taxiway** - A taxiway connected to a runway at an acute angle and designed to allow landing aeroplanes to turn off at higher speeds than are achieved on other exit taxiways thereby minimizing runway occupancy times.

**Taxiway intersection.** A junction of two or more taxiways.

**Taxiway strip.** An area including a taxiway intended to protect an aircraft operating on the taxiway and to reduce the risk of damage to an aircraft accidentally running off the taxiway.

**Threshold.** The beginning of that portion of the runway usable for landing.

**Touchdown zone.** The portion of a runway, beyond the threshold, where it is intended landing aeroplanes first contact the runway.

**Unserviceable Area** - A part of the movement area that is unfit and unavailable for use by aircraft.

**Usability factor.** The percentage of time during which the use of a runway or system of runways is not restricted because of the crosswind component.

**Work Area** - A part of an aerodrome in which maintenance or construction works are in progress.

**Note:** *Crosswind component means the surface wind component at right angles to the runway centre line.*

## 1.2 Applicability

- 1.2.1** The specifications, unless otherwise indicated in a particular context, shall apply to all aerodromes open to public use in accordance with the requirements of Article 15 of the Convention. The specifications of Chapter 3, shall apply only to land aerodromes. The specifications in this Regulation shall apply, where appropriate, to heliports but shall not apply to stolports.
- 1.2.2** Wherever a colour is referred to in this CAR 139, the specifications for that colour given in Appendix 1 shall apply.

## 1.3 Common reference systems

### 1.3.1 Horizontal reference system

World Geodetic System — 1984 (WGS-84) shall be used as the horizontal (geodetic) reference system. Reported aeronautical geographical coordinates (indicating latitude and longitude) shall be expressed in terms of the WGS-84 geodetic reference datum.

**Note:** *Comprehensive guidance material concerning WGS-84 is contained in the World Geodetic System — 1984 (WGS-84) Manual (Doc 9674).*

### 1.3.2 Vertical reference system

Mean sea level (MSL) datum, which gives the relationship of gravity-related height (elevation) to a surface known as the geoid, shall be used as the vertical reference system.

**Note 1:** *The geoid globally most closely approximates MSL. It is defined as the equipotential surface in the gravity field of the Earth which coincides with the undisturbed MSL extended continuously through the continents.*

**Note 2:** *Gravity-related heights (elevations) are also referred to as orthometric heights while distances of points above the ellipsoid are referred to as ellipsoidal heights.*

### 1.3.3 Temporal reference system

- 1.3.3.1** The Gregorian calendar and Coordinated Universal Time (UTC) shall be used as the temporal reference system.
- 1.3.3.2** When a different temporal reference system is used, this shall be indicated in GEN 2.1.2 of the Aeronautical Information Publication (AIP);

**Note:** *See PANS-AIM (Doc 10066), Appendix 2.*

## 1.4 Certification of aerodromes

- 1.4.1 An operator of an aerodrome in the Sultanate of Oman, or any territory or possession of the Sultanate of Oman, that is used by an air operator for the purpose of international civil aviation shall be in possession of an aerodrome certificate issued by PACA.
- 1.4.2 An operator of an aerodrome in the Sultanate of Oman, or any territory or possession of the Sultanate of Oman, that is used by an air operator for the purpose of a 30 seat scheduled service for the transport of passengers shall be in possession of an aerodrome certificate issued by PACA.
- 1.4.3 Any other operator of an aerodrome in the Sultanate of Oman, or any territory or possession of the Sultanate of Oman, other than an aerodrome referred to in 1.4.1 and 1.4.2 in respect of which PACA is of the opinion that meeting the requirements of a certified aerodrome is necessary in the interest of public safety shall be in possession of an aerodrome certificate issued by PACA.
- 1.4.4 A heliport in the Sultanate of Oman used or intended to be used by helicopters in international civil aviation (also refer CAR 139 Part -2)
- 1.4.5 The CAR 139 regulations does not apply in respect of a military aerodrome, unless such aerodrome is used by an air operator for the purpose of an international service for the public transport of passengers.
- 1.4.6 The regulatory framework for Aerodrome Certification is given in Chapter 11.
- 1.4.7 As part of the certification process, the aerodrome operators shall prepare and submit to PACA an aerodrome manual (hard copy and electronic) which will include all pertinent information on the aerodrome site, facilities, services, equipment, operating procedures, organization and management including a safety management system, is submitted by the applicant for acceptance prior to granting the aerodrome certificate.
- 1.4.8 Content and general guidelines for the preparation of the Aerodrome manual are given in Chapter 12.

**Note:** *The intent of a safety management system is to have in place an organized and orderly approach in the management of aerodrome safety by the aerodrome operator. CAR-100 Safety Management contains the safety management provisions applicable to certified aerodromes. Guidance on an aerodrome safety management system is given in the Safety Management Manual (SMM) (Doc 9859) and in the manual on Certification of Aerodromes (Doc 9774). Procedures on the management of change, conduct of safety assessment, reporting and analyses of safety occurrences at aerodromes and continuous monitoring to enforce compliance with applicable specifications so that identified risks are mitigated can be found in the PANS-Aerodromes (Doc 9981)*

## 1.5 Airport design

- 1.5.1 Architectural and infrastructure-related requirements for the optimum implementation of international civil aviation security measures shall be integrated into the design and construction of new facilities and alterations to existing facilities at an aerodrome.

**Note:** *Guidance on all aspects of the planning of aerodromes including security considerations is contained in the Airport Planning Manual (Doc 9184), Part 1.*

- 1.5.2 The design of aerodromes shall take into account, where appropriate, land-use and environmental control measures.

**Note:** *Guidance on land-use planning and environmental control measures is contained in the Airport Planning Manual (Doc 9184), Part 2.*

## 1.6 Reference code

**Introductory Note:** *The intent of the reference code is to provide a simple method for interrelating the numerous specifications concerning the characteristics of aerodromes so as to provide a series of aerodrome facilities that are suitable for the aeroplanes that are intended to operate at the aerodrome. The code is not intended to be used for determining runway length or pavement strength requirements. The code is composed of two elements which are related to the aeroplane performance characteristics and dimensions. Element 1 is a number based on the aeroplane reference field length and element 2 is a letter based on the aeroplane wingspan. The code letter or number within an element selected for design purposes is related to the critical aeroplane characteristics for which the facility is provided. When applying Annex 14, Volume I, first identify the aeroplanes which the aerodrome is intended to serve and then determine the two elements of the code. An aerodrome reference code — code number and letter — which is selected for aerodrome planning purposes shall be determined in accordance with the characteristics of the aeroplane for which an aerodrome facility is intended.*

- 1.6.1 The aerodrome reference code numbers and letters shall have the meanings assigned to them in Table 1-1.
- 1.6.2 The code number for element 1 shall be determined from Table 1-1, column 1, selecting the code number corresponding to the highest value of the aeroplane reference field lengths of the aeroplanes for which the runway is intended.

**Note1:** *The determination of the aeroplane reference field length is solely for the selection of a code number and is not intended to influence the actual runway length provided.*

**Note2:** *Guidance on determining the runway length is given in the Aerodrome Design Manual, (Doc 9157), Part 1 — Runways.*

- 1.6.3 The code letter for element 2 shall be determined from Table 1-1, column 3, by selecting the code letter which corresponds to the greatest wingspan, of the aeroplanes for which the facility is intended.



**Note:** Guidance on determining the aerodrome reference code is given in the Aerodrome Design Manual (Doc 9157), Parts 1 and 2.

**Table 1-1. Aerodrome reference code**

Code element 1			Code element 2
Code Number	Aeroplane reference fixed length	Code Letter	Wing Span
1	less than 800 m	A	Up to but not including 15 m
2	800 m up to but not including 1 200 m	B	15 m up to but not including 24 m
3	1 200 m up to but not including 1 800 m	C	24 m up to but not including 36 m
4	1 800 m and over	D	36 m up to but not including 52 m
		E	52 m up to but not including 65 m
		F	65 m up to but not including 80 m

## 1.7 Specific Procedures for Aerodrome Operations

Introductory Note: Nothing in this CAR 139-Part 1 is intended to inhibit the planning or provision of aerodrome facilities for larger aeroplanes that may be accommodated by the aerodrome at a later date. Appropriate additional safeguards may be taken into account to cater for more demanding aircraft that may be introduced at a later date.

1.7.1 These relate mainly to minimum clearance requirements and guidance is given in ICAO Aerodrome Design Manual Parts 1 and 2. However, where movement area facilities are built for future larger aeroplanes, the aerodrome operator must liaise with the Aerodrome Safety Department of the Public Authority for Civil Aviation Regulations to determine the interim notification of aeroplane reference code and maintenance arrangements. Provisions for the accommodation of more demanding aircraft at existing aerodromes can be found in the PANS-Aerodromes (Doc 9981). Guidance on some possible effects of future aircraft on these specifications is given in the Aerodrome Design Manual (Doc 9157), Part 2.

1.7.2 Information concerning alternative measures, operational procedures and operating restrictions implemented at an aerodrome arising from 1.7.1 shall be promulgated.

**Note 1:** PANS-AIM (Doc 10066), Appendix 12, AD 2.20 on the provision of a detailed description of local traffic regulations.

**Note 2:** See PANS-Aerodromes (Doc 9981), Chapter 3, section 3.6 on promulgation of safety information.

---

## CHAPTER 2 - AERODROME DATA

### 2.1 Aeronautical data

**2.1.1** Determination and reporting of aerodrome related aeronautical data shall be in accordance with the accuracy and integrity classification required to meet the needs of the end-users of aeronautical data.

**Note:** *Specifications concerning the accuracy and integrity classification related to aerodrome-related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1.*

**2.1.2** Aerodrome mapping data shall be made available to the aeronautical information services for aerodromes deemed relevant by Public Authority for Civil Aviation (DGCA) where safety and/or performance-based operations suggest possible benefits.

**Note:** *Aerodrome mapping databases related provisions are contained in Annex 15, Chapter 5 and PANS-AIM (Doc 10066), Chapter 5.*

**2.1.3** Where made available in accordance with 2.1.2, the selection of the aerodrome mapping data features to be collected shall be made with consideration of the intended applications.

**Note 1:** *It is intended that the selection of the features to be collected match a defined operational need.*

**Note 2:** *Aerodrome mapping databases can be provided at one of two levels of quality — fine or medium. These levels and the corresponding numerical requirements are defined in RTCA Document DO-272B and European Organization for Civil Aviation Equipment (EUROCAE) Document ED-99C — User Requirements for Aerodrome Mapping Information.*

**2.1.4** Digital data error detection techniques shall be used during the transmission and/or storage of aeronautical data and digital data sets.

**Note:** *Detailed specifications concerning digital data error detection techniques are contained in PANS-AIM (Doc 10066).*

## 2.2 Aerodrome reference point

- 2.2.1 An aerodrome reference point shall be established for an aerodrome.
- 2.2.2 The aerodrome reference point shall be located near the initial or planned geometric centre of the aerodrome and shall normally remain where first established.
- 2.2.3 The position of the aerodrome reference point shall be measured and reported to the aeronautical information services authority in degrees, minutes and seconds.

## 2.3 Aerodrome and runway elevations

- 2.3.1 The aerodrome elevation and geoid undulation at the aerodrome elevation position shall be measured to the accuracy of one-half metre or foot and reported to the aeronautical information services authority.
- 2.3.2 For an aerodrome used by international civil aviation for non-precision approaches, the elevation and geoid undulation of each threshold, the elevation of the runway end and any significant high and low intermediate points along the runway shall be measured to the accuracy of one-half metre or foot and reported to the aeronautical information services authority.
- 2.3.3 For precision approach runway, the elevation and geoid undulation of the threshold, the elevation of the runway end and the highest elevation of the touchdown zone shall be measured to the accuracy of one-quarter metre or foot and reported to the aeronautical information services authority.

**Note:** *Geoid undulation must be measured in accordance with the appropriate system of coordinates.*

## 2.4 Aerodrome reference temperature

- 2.4.1 An aerodrome operator shall determine an aerodrome reference temperature for an aerodrome in degrees Celsius.
- 2.4.2 The aerodrome reference temperature shall be the monthly mean of the daily maximum temperatures for the hottest month of the year (the hottest month being that which has the highest monthly mean temperature). This temperature shall be averaged over a period of at least 5 years.

## 2.5 Aerodrome dimensions and related information

- 2.5.1 The following data shall be measured or described, as appropriate, for each facility provided on an aerodrome:
  - a) Runway — true bearing to one-hundredth of a degree, designation number, length, width, displaced threshold location to the nearest metre or foot, slope, surface type, type of runway and, for a precision approach runway category I, the existence of an obstacle free zone when provided;

- b) Strip, runway end safety area, stopway — length, width to the nearest metre or foot, surface type, and arresting system — location (which runway end) and description;
  - c) Taxiway — designation, width, surface type;
  - d) Apron — surface type, aircraft stands;
  - e) The boundaries of the air traffic control service;
  - f) Clearway — length to the nearest metre or foot, ground profile;
  - g) Visual aids for approach procedures, marking and lighting of runways, taxiways and aprons, other visual guidance and control aids on taxiways and aprons, including taxi-holding positions and stopbars, and location and type of visual docking guidance systems;
  - h) Location and radio frequency of any VOR aerodrome checkpoint;
  - i) Location and designation of standard taxi-routes; and
  - j) Distances to the nearest metre or foot of localizer and glide path elements comprising an instrument landing system (ILS) or azimuth and elevation antenna of a microwave landing system (MLS) in relation to the associated runway extremities.
- 2.5.2** The geographical coordinates of each threshold shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.5.3** The geographical coordinates of appropriate taxiway centre line points shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.5.4** The geographical coordinates of each aircraft stand shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.5.5** The geographical coordinates of obstacles in Area 2 (the part within the aerodrome boundary) and in Area 3 shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and tenths of seconds. In addition, the top elevation, type, marking and lighting (if any) of obstacles shall be reported to the aeronautical information services authority.

**Note 1:** See Annex 15, Appendix 1, for graphical illustrations of obstacle data collection surfaces and criteria used to identify obstacles in Areas 2 and 3.

**Note 2:** PANS-AIM (Doc 10066), Appendix 1 and Appendix 8 provides requirements for obstacle data determination in Areas 2 and 3.

## 2.6 Strength of pavements

**2.6.1** The bearing strength of a pavement shall be determined.

**2.6.2** The bearing strength of a pavement intended for aircraft of apron (ramp) mass greater than 5 700 kg shall be made available using the aircraft classification number — pavement classification number (ACN-PCN) method by reporting all of the following information:

- a) The pavement classification number (PCN);
- b) Pavement type for ACN-PCN determination;
- c) Subgrade strength category;
- d) Maximum allowable tire pressure category or maximum allowable tire pressure value; and
- e) Evaluation method.

**Note:** *If necessary, PCNs may be published to an accuracy of one-tenth of a whole number.*

**2.6.3** The pavement classification number (PCN) reported shall indicate that an aircraft with an aircraft classification number (ACN) equal to or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure, or aircraft all-up mass for specified aircraft type(s).

**Note:** *Different PCNs may be reported if the strength of the pavement is subject to significant seasonal variation.*

**2.6.4** The ACN of an aircraft shall be determined in accordance with the standard procedures associated with the ACN-PCN method.

**Note:** *The standard procedures for determining the ACN of an aircraft are given in the Aerodrome Design Manual (Doc 9157), Part 3. For convenience several aircraft types currently in use have been evaluated on rigid and flexible pavements founded on the four subgrade categories in 2.6.6 b) below and the results tabulated in that manual.*

**2.6.5** For the purposes of determining the ACN, the behavior of a pavement shall be classified as equivalent to a rigid or flexible construction.

**2.6.6** Information on pavement type for ACN-PCN determination, subgrade strength category, maximum allowable tire pressure category and evaluation method shall be reported using the following codes:

---

**a) Pavement type for ACN-PCN determination:** **Code**

Rigid pavement	R
----------------	---

Flexible pavement	F
-------------------	---

**b) Subgrade strength category** **Code**

High strength: characterized by $K = 150 \text{ MN/m}^3$ and representing all $K$ values above $120 \text{ MN/m}^3$ for rigid pavements, and by $\text{CBR} = 15$ and representing all $\text{CBR}$ values above 13 for flexible pavements.	A
---	---

Medium strength: characterized by $K = 80 \text{ MN/m}^3$ and representing a range in $K$ of 60 to $120 \text{ MN/m}^3$ for rigid pavements, and by $\text{CBR} = 10$ and representing a range in $\text{CBR}$ of 8 to 13 for flexible pavements.	B
---	---

Low strength: characterized by $K = 40 \text{ MN/m}^3$ and representing a range in $K$ of 25 to $60 \text{ MN/m}^3$ for rigid pavements, and by $\text{CBR} = 6$ and representing a range in $\text{CBR}$ of 4 to 8 for flexible pavements.	C
---	---

Ultra low strength: characterized by $K = 20 \text{ MN/m}^3$ and representing a range in $K$ of 25 to $60 \text{ MN/m}^3$ for rigid pavements, and by $\text{CBR} = 3$ and representing a range in $\text{CBR}$ values below 4 for flexible pavements	D
---	---

**c) Maximum allowable tire pressure category:** **Code**

Unlimited: no pressure limit	W
------------------------------	---

High: pressure limited to 1.75 MPa	X
------------------------------------	---

Medium: pressure limited to 1.25 MPa	Y
--------------------------------------	---

Low: pressure limited to 0.50 MPa	Z
-----------------------------------	---

**Note:** See Note 5 to 10.2.1 where the pavement is used by aircraft with tire pressures in the upper categories.

**d) Evaluation method:** **Code**

Technical evaluation: representing a specific study of the pavement characteristics and application of pavement behavior technology.	T
--	---

Using aircraft experience: representing a knowledge of the specific type and mass of aircraft satisfactorily being supported under regular use.	U
---	---

**Note:** The following examples illustrate how pavement strength data are reported under the ACN-PCN method.

**Example 1.** If the bearing strength of a rigid pavement, resting on a medium strength subgrade, has been assessed by technical evaluation to be PCN 80 and there is no tire pressure limitation, then the reported information would be:

**PCN 80 / R / B / W / T**

**Example 2.** the bearing strength of a composite pavement, behaving like a flexible pavement and resting on a high strength subgrade, has been assessed by using aircraft experience to be PCN 50 and the maximum tire pressure allowable is 1.25 MPa, then the reported information would be:

**PCN 50 / F / A / Y / U**

**Note:** Composite construction.

**Example 3.** If the bearing strength of a flexible pavement, resting on a medium strength subgrade, has been assessed by technical evaluation to be PCN 40 and the maximum allowable tire pressure is 0.80 MPa, then the reported information would be:

**PCN 40 / F / B / 0.80 MPa / T**

**Example 4.** If a pavement is subject to a B747-400 all-up mass limitation of 390 000 kg, then the reported information would include the following note.

**Note:** The reported PCN is subject to a B747-400 all-up mass limitation of 390 000 kg.

**2.6.7** Public Authority for Civil Aviation shall prepare guidance material to regulate the use of a pavement by an aircraft with an ACN higher than the PCN reported for that pavement in accordance with 2.6.2 and 2.6.3.

**Note:** Attachment A, Section 20, details a simple method for regulating overload operations while the Aerodrome Design Manual (Doc 9157), Part 3, includes the descriptions of more detailed procedures for evaluation of pavements and their suitability for restricted overload operations.

**2.6.8** The bearing strength of a pavement intended for aircraft of apron (ramp) mass equal to or less than 5 700 kg shall be made available by reporting the following information:

- a) Maximum allowable aircraft mass; and
- b) Maximum allowable tire pressure.

**Example:** 4 000 kg/0.50 MPa.



## 2.7 Pre-flight altimeter check location

**2.7.1** One or more pre-flight altimeter check locations shall be established for an aerodrome.

**2.7.2** A pre-flight check location shall be located on an apron.

**Note 1:** *Locating a pre-flight altimeter check location on an apron enables an altimeter check to be made prior to obtaining taxi clearance and eliminates the need for stopping for that purpose after leaving the apron.*

**Note 2:** *Normally an entire apron can serve as a satisfactory altimeter check location.*

**2.7.3** The elevation of a pre-flight altimeter check location shall be given as the average elevation, rounded to the nearest metre or foot, of the area on which it is located. The elevation of any portion of a pre-flight altimeter check location shall be within 3 m (10 ft) of the average elevation for that location.

## 2.8 Declared distances

The following distances shall be calculated to the nearest metre or foot for a runway intended for use by international commercial air transport:

- a) Take-off run available;
- b) Take-off distance available;
- c) Accelerate-stop distance available; and
- d) Landing distance available.

**Note:** *Guidance on calculation of declared distances is given in Attachment A, Section 3.*

## 2.9 Condition of the movement area and related facilities

**2.9.1** Information on the condition of the movement area and the operational status of related facilities shall be provided to the appropriate aeronautical information services units, and similar information of operational significance to the air traffic services units, to enable those units to provide the necessary information to arriving and departing aircraft. The information shall be kept up to date and changes in conditions reported without delay.

**Note:** *The nature, format and conditions of the information to be provided are specified in the PANS-AIM (Doc 10066) and the PANS – ATM (Doc 4444)*

**2.9.2** The condition of the movement area and the operational status of related facilities shall be monitored, and reports on matters of operational significance affecting aircraft and aerodrome operations shall be provided in order to take appropriate action, particularly in respect of the following:

- a) Construction or maintenance work;
- b) Rough or broken surfaces on a runway, a taxiway or an apron;
- c) Water on a runway, a taxiway or an apron;
- d) Other temporary hazards, including parked aircraft;
- e) Failure or irregular operation of part or all of the aerodrome visual aids; and
- f) Failure of the normal or secondary power supply.

**Note 1:** *Other contaminants may include mud, dust, sand, volcanic ash, oil and rubber. Annex 6, part 1, Attachment C provides guidance on the description of runway surface conditions. Additional guidance is included in the Airport Services Manual (Doc 9137), Part 2.*

**2.9.3** To facilitate compliance with 2.9.1 and 2.9.2, inspections of the movement area shall be carried out each day at least once where the code number is 1 or 2 and at least twice where the code number is 3 or 4.

**Note:** *Guidance on carrying out daily inspections of the movement area is given in the Airport Services Manual (Doc 9137), Part 8 and in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476).*

**2.9.4** Personnel assessing and reporting runway surface conditions required in 2.9.2 shall be trained and competent to meet criteria approved by the Public Authority.

**Note:** *Guidance on criteria is included in the Airport Service Manual (Doc 9137, Part 8, and Chapter 7)*

### **Water on a runway**

**2.9.5** Whenever water is present on a runway, a description of the runway surface conditions shall be made available using the following terms:

**DAMP:** the surface shows a change of colour due to moisture.

**WET:** the surface is soaked but there is no standing water.

**STANDING WATER:** for aeroplane performance purposes, a runway where more than 25 per cent of the runway surface area (whether in isolated areas or not) within the required length and width being used is covered by water more than 3 mm deep.

**2.9.6** Information that a runway or portion thereof may be slippery when wet shall be made available to Pilots.

**Note:** *The determination that a runway or portion thereof may be slippery when wet is not based solely on the friction measurement obtained using a continuous friction measuring device.*

Supplementary tools to undertake this assessment are described in the Airport Services Manual (Doc 9137), Part 2.

**2.9.7** Notification shall be given to aerodrome users when the friction level of a paved runway or portion thereof is less than that specified values given in table 2-1 in accordance with 10.2.3 (If the aerodrome operator use another type of equipment different than the equipment stipulated in table 2-1, shall have prior approval from PACA).

**Note:** Guidance on conducting a runway surface friction characteristics evaluation programme that includes determining and expressing the minimum friction level is provided in Attachment A, Section 7

Table 2-1 Runway Surface Condition Levels

Test equipment	Test tire		Test speed (km/h)	Test water depth (mm)	Design objective for new surface	Maintenance planning level	Minimum friction level
	Type	Pressure (kPa)					
(1)	(2)		(3)	(4)	(5)	(6)	(7)
Mu-meter Trailer	A	70	65	1.0	0.72	0.52	0.42
	A	70	95	1.0	0.66	0.38	0.26
Skiddometer Trailer	B	210	65	1.0	0.82	0.60	0.50
	B	210	95	1.0	0.74	0.47	0.34
Surface Friction Tester Vehicle	B	210	65	1.0	0.82	0.60	0.50
	B	210	95	1.0	0.74	0.47	0.34
Runway Friction Tester Vehicle	B	210	65	1.0	0.82	0.60	0.50
	B	210	95	1.0	0.74	0.54	0.41
TATRA Friction Tester Vehicle	B	210	65	1.0	0.76	0.57	0.48
	B	210	95	1.0	0.67	0.52	0.42
RUNAR Trailer	B	210	65	1.0	0.69	0.52	0.45
	B	210	95	1.0	0.63	0.42	0.32
GRIPTESTER Trailer	C	140	65	1.0	0.74	0.53	0.43
	C	140	95	1.0	0.64	0.36	0.24

## 2.10 Disabled aircraft removal

**Note:** See 9.3 for information on disabled aircraft removal services.

**2.10.1** The telephone/telex number(s) of the office of the aerodrome coordinator of operations for the removal of an aircraft disabled on or adjacent to the movement area shall be made available, on request, to aircraft operators.

**2.10.2** Information concerning the capability to remove an aircraft disabled on or adjacent to the movement area shall be made available in the Aerodrome Manual and AIP

**Note:** The capability to remove a disabled aircraft may be expressed in terms of the largest type of aircraft which the aerodrome is equipped to remove.

## 2.11 Rescue and firefighting

**Note:** See 9.2 for information on rescue and firefighting services.

- 2.11.1 Information concerning the level of protection provided at an aerodrome for aircraft rescue and firefighting purposes shall be made available in the Aerodrome Manual and AIP
- 2.11.2 The level of protection normally available at an aerodrome shall be expressed in terms of the category of the rescue and firefighting services as described in 9.2 and in accordance with the types and amounts of extinguishing agents normally available at the aerodrome.
- 2.11.3 Changes in the level of protection normally available at an aerodrome for rescue and firefighting shall be notified to the appropriate air traffic services units and aeronautical information services units to enable those units to provide the necessary information to arriving and departing aircraft. When such a change has been corrected, the above units shall be advised accordingly.

**Note:** Changes in the level of protection from that normally available at the aerodrome could result from a change in the availability of extinguishing agents, equipment to deliver the agents or personnel to operate the equipment, etc.

- 2.11.4 A change shall be expressed in terms of the new category of the rescue and firefighting service available at the aerodrome.

## 2.12 Visual approach slope indicator systems

The following information concerning a visual approach slope indicator system installation shall be made available:

- a. Associated runway designation number;
- b. Type of system according to 5.3.5.2. For an AT-VASIS, PAPI or APAPI installation, the side of the runway on which the lights are installed, i.e. left or right, shall be given;
- c. Where the axis of the system is not parallel to the runway centre line, the angle of displacement and the direction of displacement, i.e. left or right, shall be indicated;
- d. Nominal approach slope angle(s). For a T-VASIS or an AT-VASIS this shall be angle  $\theta$  according to the formula in Figure 5-18 and for a PAPI and an APAPI this shall be angle  $(B + C) \div 2$  and  $(A + B) \div 2$ , respectively as in Figure 5-20; and
- e. Minimum eye height(s) over the threshold of the on-slope signal(s). For a T-VASIS or an AT-VASIS this shall be the lowest height at which only the wing bar(s) are visible; however, the additional heights at which the wing bar(s) plus one, two or three fly-down light units come into view may also be reported if such information would be of benefit to aircraft using the approach. For a PAPI this shall be the

setting angle of the third unit from the runway minus 2', i.e. angle B minus 2', and for an APAPI this shall be the setting angle of the unit farther from the runway minus 2', i.e. angle A minus 2'.

- f. Evidence of calculations of, approach slope angle and its correlation with instrument approach procedure, and of MHT

## **2.13 Coordination between aeronautical information services and aerodrome authorities**

**2.13.1** To ensure that aeronautical information services units obtain information to enable them to provide up-to-date pre-flight information and to meet the need for in-flight information, arrangements shall be made between aeronautical information services and aerodrome authorities responsible for aerodrome services to report to the responsible aeronautical information services unit, with a minimum of delay:

- a) Information on the status of certification of aerodromes and aerodrome conditions (ref. 1.4, 2.9, 2.10, 2.11 and 2.12);
- b) The operational status of associated facilities, services and navigation aids within their area of responsibility;
- c) Any other information considered to be of operational significance.

**2.13.2** Before introducing changes to the air navigation system, due account shall be taken by the services responsible for such changes of the time needed by aeronautical information services for the preparation, production and issue of relevant material for promulgation. To ensure timely provision of the information to aeronautical information services, close coordination between those services concerned is therefore required.

**2.13.3** Of a particular importance are changes to aeronautical information that affect charts and/or computer-based navigation systems which qualify to be notified by the aeronautical information regulation and control (AIRAC) system as specified in Annex 15, Chapter 6 and Appendix 4. The predetermined, internationally agreed AIRAC effective dates in addition to 14 days postage time shall be observed by the responsible aerodrome services when submitting the raw information/data to aeronautical information services.

**Note:** Detailed specifications concerning the AIRAC system are contained in PANS-AIM (Doc 10066), Chapter 6.

**2.13.4** The aerodrome services responsible for the provision of raw aeronautical information/data to the aeronautical information services shall do that while taking into account accuracy and integrity requirements required to meet the needs of the end-user of aeronautical data.

**Note 1:** *Specifications concerning the accuracy and integrity classification of aerodrome-related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1.*

**Note 2:** *Specifications for the issue of NOTAM are contained in Annex 15, Chapter 6 and PANS-AIM (Doc 10066), Appendices 3 and 4, respectively.*

**Note 3:** *AIRAC information is distributed by the AIS at least 42 days in advance of the AIRAC effective dates with the objective of reaching recipients at least 28 days in advance of the effective date.*

**Note 4:** *The schedule of the predetermined internationally agreed AIRAC common effective dates at intervals of 28 days and guidance for the AIRAC use are contained in the Aeronautical Information Services Manual (Doc 8126, Chapter 2).*

## CHAPTER 3 - PHYSICAL CHARACTERISTICS

### 3.1 Runways

#### Number and orientation of runways

##### **Introductory Note:**

*Many factors affect the determination of the orientation, siting and number of runways. One important factor is the usability factor, as determined by the wind distribution, which is specified hereunder. Another important factor is the alignment of the runway to facilitate the provision of approaches conforming to the approach surface specifications of Chapter 4. In Attachment A, Section 1, information is given concerning these and other factors.*

*When a new instrument runway is being located, particular attention needs to be given to areas over which aeroplanes will be required to fly when following instrument approach and missed approach procedures, so as to ensure that obstacles in these areas or other factors will not restrict the operation of the aeroplanes for which the runway is intended.*

**3.1.1** The number and orientation of runways at an aerodrome shall be such that the usability factor of the aerodrome is not less than 95 per cent for the aeroplanes that the aerodrome is intended to serve.

**3.1.2** The siting and orientation of runways at an aerodrome shall, be such that the arrival and departure tracks minimize interference with areas approved for residential use and other noise-sensitive areas close to the aerodrome in order to avoid future noise problems.

**Note:** *Guidance on how to address noise problems is provided in the Airport Planning Manual (Doc 9184), Part 2, and in Guidance on the Balanced Approach to Aircraft Noise Management (Doc 9829).*

##### **3.1.3 Choice of maximum permissible crosswind components:**

In the application of 3.1.1 it shall be assumed that landing or take-off of aeroplanes is, in normal circumstances, precluded when the crosswind component exceeds:

- 37 km/h (20 kt) in the case of aeroplanes whose reference field length is 1 500 m or over, except that when poor runway braking action owing to an insufficient longitudinal coefficient of friction is experienced with some frequency, a crosswind component not exceeding 24 km/h (13 kt) should be assumed;
- 24 km/h (13 kt) in the case of aeroplanes whose reference field length is 1 200 m or up to but not including 1 500 m; and
- 19 km/h (10 kt) in the case of aeroplanes whose reference field length is less than 1 200 m.

**Note:** *In Attachment A, Section 1, guidance is given on factors affecting the calculation of the estimate of the usability factor and allowances which may have to be made to take account of the effect of unusual circumstances.*

### 3.1.4 Data to be used

The selection of data to be used for the calculation of the usability factor shall be based on reliable wind distribution statistics that extend over not less than five years. The observations used should be made at least eight times daily and spaced at equal intervals of time.

**Note:** *These winds are mean winds. Reference to the need for some allowance for gusty conditions is made in Attachment A, Section 1.*

### Location of threshold

**3.1.5** A threshold shall normally be located at the extremity of a runway unless operational considerations, at the discretion of PACA, justify the choice of another location.

**Note:** *Guidance on the siting of the threshold is given in Attachment A, Section 11.*

**3.1.6** When it is necessary to displace a threshold, either permanently or temporarily, from its normal location, account shall be taken of the various factors which may have a bearing on the location of the threshold. Where this displacement is due to an unserviceable runway condition, a cleared and graded area of at least 60 m in length shall be available between the unserviceable area and the displaced threshold. Additional distance shall also be provided to meet the requirements of the runway end safety area as appropriate.

**Note:** *Guidance on factors which may be considered in the determination of the location of a displaced threshold is given in Attachment A, Section 11.*

### Actual length of runways

#### 3.1.7 Primary runway

Except as provided in 3.1.9, the actual runway length to be provided for a primary runway shall be adequate to meet the operational requirements of the aeroplanes for which the runway is intended and shall be not less than the longest length determined by applying the corrections for local conditions to the operations and performance characteristics of the relevant aeroplanes.

**Note 1:** *This specification does not necessarily mean providing for operations by the critical aeroplane at its maximum mass.*

**Note 2:** *Both take-off and landing requirements need to be considered when determining the length of runway to be provided and the need for operations to be conducted in both directions of the runway.*

**Note 3:** *Local conditions that may need to be considered include elevation, temperature, runway slope, humidity and the runway surface characteristics.*

**Note 4:** *When performance data on aeroplanes for which the runway is intended are not known, guidance on the determination of the actual length of a primary runway by application of general correction factors is given in the ICAO Aerodrome Design Manual (Doc 9157), Part 1.*



### 3.1.8 Secondary runway

The length of a secondary runway shall be determined similarly to primary runways except that it needs only to be adequate for those aeroplanes which require to use that secondary runway in addition to the other runway or runways in order to obtain a usability factor of at least 95 per cent.

### 3.1.9 Runways with stopways or clearways

Where a runway is associated with a stopway or clearway, an actual runway length less than that resulting from application of 3.1.7 or 3.1.8, as appropriate, may be considered satisfactory, but in such a case any combination of runway, stopway and clearway provided shall permit compliance with the operational requirements for take-off and landing of the aeroplanes the runway is intended to serve.

**Note:** Guidance on use of stopways and clearways is given in Attachment A, Section 2.

### Width of runways

**3.1.10** The width of a runway shall be not less than the appropriate dimension specified in the following tabulation:

Code number	Outer Main Gear Wheel Span (OMGWS)			
	Up to but not including 4.5 m	4.5 m up to but not including 6 m	6 m up to but not including 9 m	9 m up to but not including 15 m
1a	18 m	18 m	23 m	—
2a	23 m	23 m	30 m	—
3	30 m	30 m	30 m	45 m
4	—	—	45 m	45 m

a) The width of a precision approach runway shall be not less than 30 m where the code number is 1 or 2.

**Note 1:** The combinations of code numbers and OMGWS for which widths are specified have been developed for typical aeroplane characteristics.

**Note 2:** Factors affecting runway width are given in the Aerodrome Design Manual (Doc 9157), Part 1.

**Note 3:** See 3.2 concerning the provision of runway shoulders, in particular for Code F aeroplanes with four (or more) engines.

### Minimum distance between parallel runways

**3.1.11** Where parallel non -instrument runways are intended for simultaneous use, the minimum distance between their centre lines shall be:

- 210 m where the higher code number is 3 or 4;
- 150 m where the higher code number is 2; and

- 120 m where the higher code number is 1.

**Note:** Procedures for wake turbulence categorization of aircraft and wake turbulence separation minima are contained in the Procedures for Air Navigation Services — Air Traffic Management (PANS-ATM), Doc 4444, Chapter 4, 4.9 and Chapter 5, 5.8, respectively.

**3.1.12** Where parallel instrument runways are intended for simultaneous use subject to conditions specified in the PANS-ATM (Doc 4444) and the PANS-OPS (Doc 8168), Volume I, the minimum distance between their centre lines shall be:

- 1 035 m for independent parallel approaches;
- 915 m for dependent parallel approaches;
- 760 m for independent parallel departures;
- 760 m for segregated parallel operations;

**Except that:**

a) For segregated parallel operations the specified minimum distance:

- 1) may be decreased by 30 m for each 150 m that the arrival runway is staggered toward the arriving aircraft, to a minimum of 300 m; and
- 2) should be increased by 30 m for each 150 m that the arrival runway is staggered away from the arriving aircraft;

b) For independent parallel approaches, combinations of minimum distances and associated conditions other than those specified in the PANS-ATM (Doc 4444) may be applied when it is determined that such combinations would not adversely affect the safety of aircraft operations.

**Note:** Procedures and facilities requirements for simultaneous operations on parallel or near-parallel instrument runways are contained in the PANS-ATM (Doc 4444), Chapter 6 and the PANS-OPS (Doc 8168), Volume I, Part III, Section 2, and Volume II, Part I, Section 3; Part II, Section 1; and Part III, Section 3, and relevant guidance is contained in the Manual on Simultaneous Operations on Parallel or Near-Parallel Instrument Runways (SOIR) (Doc 9643).

**Slopes on runways**

**3.1.13 Longitudinal slopes**

The slope computed by dividing the difference between the maximum and minimum elevation along the runway centre line by the runway length shall not exceed:

- 1 per cent where the code number is 3 or 4; and
- Per cent where the code number is 1 or 2.

**3.1.14 Along no portion of a runway shall the longitudinal slope exceed:**

- 1.25 per cent where the code number is 4, except that for the first and last quarter of the length of the runway the longitudinal slope shall not exceed 0.8 per cent;
- 1.5 per cent where the code number is 3, except that for the first and last quarter of the length of a precision approach runway category II or III the longitudinal slope shall not exceed 0.8 per cent; and
- Per cent where the code number is 1 or 2.

### 3.1.15 Longitudinal slope changes

Where slope changes cannot be avoided, a slope change between two consecutive slopes shall not exceed:

- 1.5 per cent where the code number is 3 or 4; and
- Per cent where the code number is 1 or 2.

**Note:** *Guidance on slope changes before a runway is given in Attachment A, Section 4.*

**3.1.16** The transition from one slope to another shall be accomplished by a curved surface with a rate of change not exceeding:

- 0.1 per cent per 30 m (minimum radius of curvature of 30 000 m) where the code number is 4;
- 0.2 per cent per 30 m (minimum radius of curvature of 15 000 m) where the code number is 3; and
- 0.4 per cent per 30 m (minimum radius of curvature of 7 500 m) where the code number is 1 or 2.

### 3.1.17 Sight distance

Where slope changes cannot be avoided, they shall be such that there will be an Unobstructed line of sight from:

- any point 3 m above a runway to all other points 3 m above the runway within a distance of at least half the length of the runway where the code letter is C, D, E or F;
- any point 2 m above a runway to all other points 2 m above the runway within a distance of at least half the length of the runway where the code letter is B; and
- any point 1.5 m above a runway to all other points 1.5 m above the runway within a distance of at least half the length of the runway where the code letter is A.

**Note:** *Consideration will have to be given to providing an unobstructed line of sight over the entire length of a single runway where a full-length parallel taxiway is not available. Where an aerodrome has intersecting runways, additional criteria on the line of sight of the intersection area would need to be considered for operational safety. See the Aerodrome Design Manual (Doc 9157), Part 1.*

### 3.1.18 Distance between slope changes

Undulations or appreciable changes in slopes located close together along a runway shall be avoided. The distance between the points of intersection of two successive curves shall not be less than:

- a) The sum of the absolute numerical values of the corresponding slope changes multiplied by the appropriate value as follows:
  - 30 000 m where the code number is 4;
  - 15 000 m where the code number is 3; and
  - 5 000 m where the code number is 1 or 2; or
- b) 45 m;

Whichever is greater.

**Note:** Guidance on implementing this specification is given in Attachment A, Section 4.

### 3.1.19 Transverse slopes

To promote the most rapid drainage of water, the runway surface shall, if practicable, be cambered except where a single cross fall from high to low in the direction of the wind most frequently associated with rain would ensure rapid drainage. The transverse slope shall ideally be:

- 1.5 per cent where the code letter is C, D, E or F; and
- 2 per cent where the code letter is A or B;

But in any event shall not exceed 1.5 per cent or 2 per cent, as applicable, nor be less than 1 per cent except at runway or taxiway intersections where flatter slopes may be necessary.

For a cambered surface the transverse slope on each side of the centre line shall be symmetrical.

**Note:** On wet runways with crosswind conditions the problem of aquaplaning from poor drainage is apt to be accentuated. In Attachment A, Section 7, information is given concerning this problem and other relevant factors.

**3.1.20** The transverse slope shall be substantially the same throughout the length of a runway except at an intersection with another runway or a taxiway where an even transition shall be provided taking account of the need for adequate drainage.

**Note:** Guidance on transverse slope is given in the Aerodrome Design Manual (Doc 9157), Part 3.

### Strength of runways

**3.1.21** A runway shall be capable of withstanding the traffic of aeroplanes the runway is intended to serve.

---

## Surface of runways

**3.1.22** The surface of a runway shall be constructed without irregularities that would impair the runway surface friction characteristics or otherwise adversely affect the take-off or landing of an aeroplane.

**Note 1:** *Surface irregularities may adversely affect the take-off or landing of an aeroplane by causing excessive bouncing, pitching, vibration, or other difficulties in the control of an aeroplane.*

**Note 2:** *Guidance on design tolerances and other information is given in Attachment A, Section 5. Additional guidance is included in the Aerodrome Design Manual (Doc 9157), Part 3.*

**3.1.23** A paved runway shall be so constructed or resurfaced as to provide surface friction characteristics at or above the minimum friction levels stated in Table 2-1.

**3.1.24** The surface of a paved runway shall be evaluated when constructed or resurfaced to determine that the surface friction characteristics achieve the design objectives.

**Note:** *Guidance on surface friction characteristics of a new or resurfaced runway is given in Attachment A, Section 7. Additional guidance is included in the Airport Services Manual (Doc 9137), Part 2.*

**3.1.25** Measurements of the surface friction characteristics of a new or resurfaced paved runway shall be made with a continuous friction measuring device using self-wetting features.

**Note:** *Guidance on surface friction characteristics of a new runway surfaces is given in Attachment A, Section 7. Additional guidance is included in the Airport Services Manual (Doc 9137), Part 2.*

**3.1.26** The average surface texture depth of a new surface is recommended to be not less than 1.0 mm.

**Note 1:** *Macrotexture and microtexture are taken into consideration in order to provide the required surface friction characteristics. Guidance on surface design is given in Attachment A, Section 8.*

**Note 2:** *Guidance on methods used to measure surface texture is given in the Airport Services Manual (Doc 9137), Part 2.*

**Note 3:** *Guidance on design and methods for improving surface texture is given in the Aerodrome Design Manual (Doc 9157), Part 3.*

**3.1.27** When the surface is grooved or scored, the grooves or scorings shall be either perpendicular to the runway centre line or parallel to non-perpendicular transverse joints, where applicable.

**Note:** *Guidance on methods for improving the runway surface texture is given in the Aerodrome Design Manual (Doc 9157), Part 3.*

## 3.2 Runway shoulders

### General

**Note:** Guidance on characteristics and treatment of runway shoulders is given in Attachment A, Section 7, and in the Aerodrome Design Manual (Doc 9157), Part 1.

**3.2.1** Runway shoulders shall be provided for a runway where the code letter is D, E or F

### Width of runway shoulders

**3.2.2** For aeroplanes with OMGWS from 9 m up to but not including 15 m, the runway shoulders shall extend symmetrically on each side of the runway so that the overall width of the runway and its shoulders is not less than:

- 60 m where the code letter is D or E;
- 75 m where the code letter is F

### Slopes on runway shoulders

**3.2.3** The surface of the shoulder that abuts the runway shall be flush with the surface of the runway and its transverse slope shall not exceed 2.5 per cent.

### Strength of runway shoulders

**3.2.4** The portion of a runway shoulder between the runway edge and a distance of 30 m from the runway centreline shall be prepared or constructed so as to be capable, in the event of an aeroplane running off the runway, of supporting the aeroplane without inducing structural damage to the aeroplane and of supporting ground vehicles which may operate on the shoulder.

**Note:** Guidance on strength of runway shoulders is given in the Aerodrome Design Manual (Doc 9157), Part 1.

### Surface of runway shoulders

**3.2.5** A runway shoulder shall be paved so as to resist erosion and the ingestion of the surface material by aeroplane engines.

**3.2.6** Runway shoulders for code letter F aeroplanes shall be paved to a minimum overall width of runway and shoulder of not less than 75 m.

**Note:** Guidance on surface of runway shoulders is given in the Aerodrome Design Manual, (Doc 9157), Part 1.

### 3.3 Runway turn pads

#### General

**3.3.1** Where the end of a runway is not served by a taxiway or a taxiway turnaround and where the code letter is D, E or F, a runway turn pad shall be provided to facilitate a 180-degree turn of aeroplanes. (See Figure 3-1)

**3.3.2** Where the end of a runway is not served by a taxiway or a taxiway turnaround and where the code letter is A, B or C, a runway turn pad shall be provided to facilitate a 180-degree turn of aeroplanes.

**Note 1:** Such areas may also be useful if provided along a runway to reduce taxiing time and distance for aeroplanes which may not require the full length of the runway.

**Note 2:** Guidance on the design of the runway turn pads is available in the Aerodrome Design Manual (Doc 9157), Part 1. Guidance on taxiway turnaround as an alternate facility is available in the Aerodrome Design Manual (Doc 9157), Part 2.

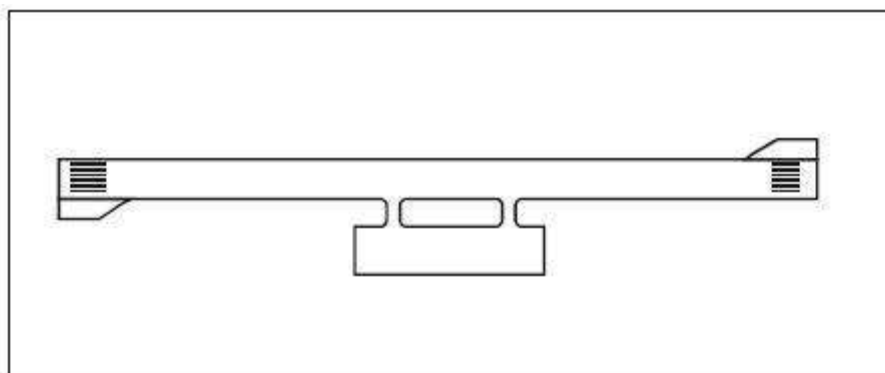


Figure 3-1. Typical turn pad layout

**3.3.3** The runway turn pad may be located on either the left or right side of the runway and adjoining the runway pavement at both ends of the runway and at some intermediate locations where deemed necessary.

**Note:** The initiation of the turn would be facilitated by locating the turn pad on the left side of the runway, since the left seat is the normal position of the pilot-in-command.

**3.3.4** The intersection angle of the runway turn pad with the runway shall not exceed 30 degrees.

**3.3.5** The nose wheel steering angle to be used in the design of the runway turn pad shall not exceed 45 degrees.

**3.3.6** The design of a runway turn pad shall be such that, when the cockpit of the aeroplane for which the turn pad is intended remains over the turn pad marking, the clearance distance between any wheel of the aeroplane landing gear and the edge of the turn pad shall be not less than that given by the following tabulation:

OMGWS				
Up to but not including 4.5 m	4.5 m up to but not including 6 m	6 m up to but not including 9 m	9 m up to but not including 15 m	
Clearance	1.50 m	2.25 m	3 m <sub>a</sub> or 4 m <sub>b</sub>	4 m

- a. If the turn pad is intended to be used by aeroplanes with a wheel base less than 18 m.
- b. If the turn pad is intended to be used by aeroplanes with a wheel base equal to or greater than 18 m.

**Note:** Wheel base means the distance from the nose gear to the geometric centre of the main gear.

### Slopes on runway turn pads

**3.3.7** The longitudinal and transverse slopes on a runway turn pad shall be sufficient to prevent the accumulation of water on the surface and facilitate rapid drainage of surface water. The slopes shall be the same as those on the adjacent runway pavement surface.

### Strength of runway turn pads

**3.3.8** The strength of a runway turn pad shall be at least equal to that of the adjoining runway which it serves, due consideration being given to the fact that the turn pad will be subjected to slow-moving traffic making hard turns and consequent higher stresses on the pavement.

**Note:** Where a runway turn pad is provided with flexible pavement, the surface would need to be capable of withstanding the horizontal shear forces exerted by the main landing gear tires during turning manoeuvres

### Surface of runway turn pads

**3.3.9** The surface of a runway turn pad shall not have surface irregularities that may cause damage to an aeroplane using the turn pad.

**3.3.10** The surface of a runway turn pad shall be so constructed or resurfaced as to provide surface friction characteristics at least equal to that of the adjoining runway.

### Shoulders for runway turn pads

**3.3.11** The runway turn pads shall be provided with shoulders of such width as is necessary to prevent surface erosion by the jet blast of the most demanding aeroplane for which the turn pad is intended, and any possible foreign object damage to the aeroplane engines.

**Note:** As a minimum, the width of the shoulders would need to cover the outer engine of the most demanding aeroplane and thus may be wider than the associated runway shoulders.

**3.3.12** The strength of runway turn pad shoulders shall be capable of withstanding the occasional passage of the aeroplane it is designed to serve without inducing structural damage to the aeroplane and to the supporting ground vehicles that may operate on the shoulder.



## 3.4 Runway strips

### General

**3.4.1** A runway and any associated stopways shall be included in a strip.

### Length of runway strips

**3.4.2** A strip shall extend before the threshold and beyond the end of the runway or stopway for a distance of:

- 60 m where the code number is 2, 3 or 4;
- 60 m where the code number is 1 and the runway is an instrument one; and
- 30 m where the code number is 1 and the runway is a non-instrument one.

### Width of runway strips

**3.4.3** A strip including a precision approach runway shall extend laterally to a distance of:

- 140 m where the code number is 3 or 4; and
- 70 m where the code number is 1 or 2;

On each side of the centre line of the runway and its extended centre line throughout the length of the strip.

**3.4.4** A strip including a non-precision approach runway shall extend laterally to a distance of at least:

- 140 m where the code number is 3 or 4; and
- 70 m where the code number is 1 or 2;

On each side of the centre line of the runway and its extended centre line throughout the length of the strip.

**3.4.5** A strip including a non- instrument runway shall extend on each side of the centre line of the runway and its extended centre line throughout the length of the strip, to a distance of at least:

- 75 m where the code number is 3 or 4;
- 40 m where the code number is 2; and
- 30 m where the code number is 1.

### Objects on runway strips

**Note:** See 9.9 for information regarding siting of equipment and installations on runway strips.

**3.4.6** An object situated on a runway strip which may endanger aeroplanes shall be regarded as an obstacle and shall, as far as practicable, be removed.

**Note 1:** Consideration will have to be given to the location and design of drains on a runway strip to prevent damage to an aeroplane accidentally running off a runway. Suitably designed drain covers may be required. For further guidance, see the Aerodrome Design Manual (Doc 9157), Part 1.

**Note 2:** Where open-air or covered storm water conveyances are installed, consideration will have to be given to ensure that their structure does not extend above the surrounding ground so as not to be considered an obstacle. See also Note 1 to 3.4.16.

**Note 3:** Particular attention needs to be given to the design and maintenance of an open-air storm water conveyance in order to prevent wildlife attraction, notably birds. If needed, it can be covered by a net. Guidance on Wildlife Control and Reduction can be found in the Airport Services Manual (Doc 9137), Part 3.

**3.4.7** No fixed object, other than visual aids required for air navigation or those required for aircraft safety purposes and which must be sited on the runway strip, and satisfying the relevant frangibility requirement in Chapter 5, shall be permitted on a runway strip:

- a. Within 77.5 m of the runway centre line of a precision approach runway category I, II or III where the code number is 4 and the code letter is F; or
- b. Within 60 m of the runway centre line of a precision approach runway category I, II or III where the code number is 3 or 4; or
- c. Within 45 m of the runway centre line of a precision approach runway category I where the code number is 1 or 2.

No mobile object shall be permitted on this part of the runway strip during the use of the runway for landing or take-off.

### Grading of runway strips

**3.4.8** That portion of a strip of an instrument runway within a distance of at least:

- 75 m where the code number is 3 or 4; and
- 40 m where the code number is 1 or 2;

From the centre line of the runway and its extended centre line shall provide a graded area for aeroplanes which the runway is intended to serve in the event of an aeroplane running off the runway.

**Note:** Guidance on grading of a greater area of a strip including a precision approach runway where the code number is 3 or 4 is given in Attachment A, Section 9.

**3.4.9** That portion of a strip of a non-instrument runway within a distance of at least:

- 75 m where the code number is 3 or 4;
- 40 m where the code number is 2; and
- 30 m where the code number is 1;

From the centre line of the runway and its extended centre line shall provide a graded area for aeroplanes which the runway is intended to serve in the event of an aeroplane running off the runway.

**3.4.10** The surface of that portion of a strip that abuts a runway, shoulder or stopway shall be flush with the surface of the runway, shoulder or stopway.

**3.4.11** That portion of a strip to at least 30 m before the start of a runway shall be prepared against blast erosion in order to protect a landing aeroplane from the danger of an exposed edge.

**Note 1:** *The area provided to reduce the erosive effects of jet blast and propeller wash may be referred to as a blast pad.*

**Note 2:** *Guidance on protection against aeroplane engine blast is available in the Aerodrome Design Manual (Doc 9157), Part 2.*

**3.4.12** Where the areas in 3.4.11 have paved surfaces, they shall be able to withstand the occasional passage of the critical aeroplane for runway pavement design.

### **Slopes on runway strips**

#### **3.4.13** Longitudinal slopes

A longitudinal slope along that portion of a strip to be graded shall not exceed:

- 1.5 per cent where the code number is 4;
- 1.75 per cent where the code number is 3; and
- 2 Per cent where the code number is 1 or 2.

#### **3.4.14** longitudinal slope changes

Slope changes on that portion of a strip to be graded shall be as gradual as practicable and abrupt changes or sudden reversals of slopes avoided.

#### **3.4.15** Transverse slopes

Transverse slopes on that portion of a strip to be graded shall be adequate to prevent the accumulation of water on the surface but shall not exceed:

- 2.5 per cent where the code number is 3 or 4; and
- 3 per cent where the code number is 1 or 2;

Except that to facilitate drainage the slope for the first 3 m outward from the runway, shoulder or stopway edge shall be negative as measured in the direction away from the runway and may be as great as 5 per cent.

**3.4.16** The transverse slopes of any portion of a strip beyond that to be graded shall not exceed an upward slope of 5 per cent as measured in the direction away from the runway.

**Note 1:** Where deemed necessary for proper drainage, an open-air storm water conveyance may be allowed in the non-graded portion of a runway strip and would be placed as far as practicable from the runway.

**Note 2:** The aerodrome RFF procedure would need to take into account the location of open-air water conveyances within the non-graded portion of a runway strip.

### Strength of runway strips

**3.4.17** That portion of a strip of an instrument runway within a distance of at least:

- 75 m where the code number is 3 or 4; and
- 40 m where the code number is 1 or 2;

From the centre line of the runway and its extended centre line shall be so prepared or constructed as to minimize hazards arising from differences in load-bearing capacity to aeroplanes which the runway is intended to serve in the event of an aeroplane running off the runway.

**Note:** Guidance on preparation of runway strips is given in the Aerodrome Design Manual (Doc 9157), Part 1.

**3.4.18** That portion of a strip containing a non-instrument runway within a distance of at least:

- 75 m where the code number is 3 or 4;
- 40 m where the code number is 2; and
- 30 m where the code number is 1;

From the centre line of the runway and its extended centre line shall be so prepared or constructed as to minimize hazards arising from differences in load-bearing capacity to aeroplanes which the runway is intended to serve in the event of an aeroplane running off the runway.

## 3.5 Runway end safety areas

### General

**3.5.1** A runway end safety area shall be provided at each end of a runway strip where:

- The code number is 3 or 4; and
- The code number is 1 or 2 and the runway is an instrument one.

**Note:** Guidance on runway end safety areas is given in Attachment A, Section 10.

**3.5.2** A runway end safety area shall be provided at each end of a runway strip where the code number is 1 or 2 and the runway is a non-instrument one.

## Dimensions of runway end safety areas

### 3.5.3 (This Subsection Is Not Used)

### 3.5.4 An Aerodrome constructed shall have a runway end safety area, extending from the end of a runway strip to a distance of at least:

- 240 m where the code number is 3 or 4; or a reduced length when an arresting system is installed;
- 120 m where the code number is 1 or 2 and the runway is an instrument one; or a reduced length when an arresting system is installed; and
- 120 m where the code number is 1 or 2 and the runway is a non-instrument one.

If an arresting system is installed, the above length may be reduced, based on the design specification of the system, subject to acceptance by PACA.

**Note:** *Guidance on arresting systems is given in Attachment A, Section 10.*

### 3.5.5 The width of a runway end safety area shall be at least twice that of the associated runway.

### 3.5.6 The width of a runway end safety area shall, wherever practicable, be equal to that of the graded portion of the associated runway strip.

## Objects on runway end safety areas

**Note:** *See 9.9 for information regarding siting of equipment and installations on runway end safety areas.*

### 3.5.7 An object situated on a runway end safety area which may endanger aeroplanes shall be regarded as an obstacle and shall, as far as practicable, be removed.

## Clearing and grading of runway end safety areas

### 3.5.8 A runway end safety area shall provide a cleared and graded area for aeroplanes which the runway is intended to serve in the event of an aeroplane undershooting or overrunning the runway.

**Note:** *The surface of the ground in the runway end safety area does not need to be prepared to the same quality as the runway strip. See, however, 3.5.12.*

## Slopes on runway end safety areas

### 3.5.9 General

The slopes of a runway end safety area shall be such that no part of the runway end safety area penetrates the approach or take-off climb surface.

### 3.5.10 Longitudinal slopes

The longitudinal slopes of a runway end safety area shall not exceed a downward slope of 5 per cent. Longitudinal slope changes shall be as gradual and avoiding abrupt changes or sudden reversals of slopes.

### **3.5.11 Transverse slopes**

The transverse slopes of a runway end safety area shall not exceed an upward or downward slope of 5 per cent. Transitions between differing slopes shall be gradual.

## **Strength of runway end safety areas**

**3.5.12** A runway end safety area shall be prepared or constructed as to reduce the risk of damage to an aeroplane undershooting or overrunning the runway, enhance aeroplane deceleration and facilitate the movement of rescue and firefighting vehicles as required in 9.2.35 to 9.2.37.

***Note:** Guidance on the strength of a runway end safety area is given in the Aerodrome Design Manual (Doc 9157), Part 1.*

## **3.6 Clearways**

*Note: The inclusion of detailed specifications for clearways in this section is not intended to imply that a clearway has to be provided. Attachment A, Section 2, provides information on the use of clearways.*

*If a Clearway is provided then the following design specifications shall be met:*

### **Location of clearways**

**3.6.1** The origin of a clearway shall be at the end of the take-off run available.

### **Length of clearways**

**3.6.2** The length of a clearway shall not exceed half of the runway length, but shall not be less than:

### **Width of clearways**

**3.6.3** A clearway shall extend laterally to a distance of at least 75 m on each side of the extended centre line of the runway.

### **Slopes on clearways**

**3.6.4** The ground in a clearway shall not project above a plane having an upward slope of 1.25 per cent, the lower limit of this plane being a horizontal line which:

- a. Is perpendicular to the vertical plane containing the runway centre line; and
- b. Passes through a point located on the runway centre line at the end of the take-off run available.

**Note:** Because of transverse or longitudinal slopes on a runway, shoulder or strip, in certain cases the lower limit of the clearway plane specified above may be below the corresponding elevation of the runway, shoulder or strip. It is not intended that these surfaces be graded to conform with the lower limit of the clearway plane nor is it intended that terrain or objects which are above the clearway plane beyond the end of the strip but below the level of the strip be removed unless it is considered they may endanger aeroplanes.

**3.6.5** Abrupt upward changes in slope shall be avoided when the slope on the ground in a clearway is relatively small or when the mean slope is upward. In such situations, in that portion of the clearway within a distance of 22.5 m or half the runway width whichever is greater on each side of the extended centre line, the slopes, slope changes and the transition from runway to clearway shall generally conform with those of the runway with which the clearway is associated.

### Objects on clearways

**Note:** See 9.9 for information regarding siting of equipment and installations on clearways.

**3.6.6** An object situated on a clearway which may endanger aeroplanes in the air shall be regarded as an obstacle and shall be removed.

## 3.7 Stopways

**Note:** The inclusion of detailed specifications for stopways in this section is not intended to imply that a stopway has to be provided. Attachment A, Section 2, provides information on the use of stopways.

### Width of stopways

**3.7.1** A stopway shall have the same width as the runway with which it is associated.

### Slopes on stopways

**3.7.2** Slopes and changes in slope on a stopway, and the transition from a runway to a stopway, shall comply with the specifications of 3.1.13 to 3.1.19 for the runway with which the stopway is associated except that:

- a) The limitation in 3.1.14 of a 0.8 per cent slope for the first and last quarter of the length of a runway need not be applied to the stopway; and
- b) At the junction of the stopway and runway and along the stopway the maximum rate of slope change may be 0.3 per cent per 30 m (minimum radius of curvature of 10 000m) for a runway where the code number is 3 or 4.

### Strength of stopways

**3.7.3** A stopway shall be prepared or constructed so as to be capable, in the event of an abandoned take-off, of supporting the aeroplane which the stopway is intended to serve without inducing structural damage to the aeroplane.

**Note:** Attachment A, Section 2, presents guidance relative to the support capability of a stopway.

## Surface of stopways

**3.7.4** The surface of a paved stopway shall be so constructed or resurfaced as to provide surface friction characteristics at or above those of the associated runway

## 3.8 Radio altimeter operating area

### General

**3.8.1** A radio altimeter operating area shall be established in the pre-threshold area of a precision approach runway.

### Length of the area

**3.8.2** A radio altimeter operating area shall extend before the threshold for a distance of at least 300 m.

### Width of the area

**3.8.3** A radio altimeter operating area shall extend laterally, on each side of the extended centre line of the runway, to a distance of 60 m, except that, when special circumstances so warrant, the distance may be reduced to no less than 30 m if an aeronautical study indicates that such reduction would not affect the safety of operations of aircraft.

### Longitudinal slope changes

**3.8.4** On a radio altimeter operating area, slope changes shall be avoided or kept to a minimum. Where slope changes cannot be avoided, the slope changes shall be as gradual as practicable and abrupt changes or sudden reversals of slopes avoided. The rate of change between two consecutive slopes shall not exceed 2 per cent per 30 m.

**Note:** Guidance on radio altimeter operating area is given in Attachment A, Section 4.3, and in the Manual of All-Weather Operations, (Doc 9365), Section 5.2. Guidance on the use of radio altimeter is given in the PANS-OPS, Volume II, Part II, Section 1.

## 3.9 Taxiways

**Note 1:** Unless otherwise indicated the requirements in this section are applicable to all types of taxiways.

**Note 2:** See Attachment A, Section 22 for specific taxiway design guidance which may assist in the prevention of runway incursions when developing a new taxiway or improving existing ones with a known runway incursion safety risk.

### General

**3.9.1** Taxiways shall be provided to permit the safe and expeditious surface movement of aircraft.



**Note:** Guidance on layout of taxiways is given in the Aerodrome Design Manual (Doc 9157), Part 2.

- 3.9.2** Sufficient entrance and exit taxiways for a runway shall be provided to expedite the movement of aeroplanes to and from the runway and provision of rapid exit taxiways considered when traffic volumes are high.
- 3.9.3** The design of a taxiway shall be such that, when the cockpit of the aeroplane for which the taxiway is intended remains over the taxiway centre line markings, the clearance distance between the outer main wheel of the aeroplane and the edge of the taxiway shall be not less than that given by the following tabulation:

OMGWS				
	Up to but not including 4.5 m	4.5 m up to but not including 6 m	6 m up to but not including 9 m	9 m up to but not including 15 m
Clearance	1.50 m	2.25 m	3 m a, b or 4 m c	4 m

- On straight portions.
- On curved portions if the taxiway is intended to be used by aeroplanes with a wheel base of less than 18 m.
- On curved portions if the taxiway is intended to be used by aeroplanes with a wheel base equal to or greater than 18 m.

**Note:** Wheel base means the distance from the nose gear to the geometric centre of the main gear.

### Width of taxiways

- 3.9.4** A straight portion of a taxiway shall have a width of not less than that given by the following tabulation:

OMGWS				
	Up to but not including 4.5 m	4.5 m up to but not including 6 m	6 m up to but not including 9 m	9 m up to but not including 15 m
Taxiway width	7.5 m	10.5 m	15 m	23 m

**Note:** Guidance on width of taxiways is given in the Aerodrome Design Manual (Doc 9157), Part 2.

### Taxiway curves


- 3.9.5** Changes in direction of taxiways shall be as few and small as possible. The radii of the curves shall be compatible with the manoeuvring capability and normal taxiing speeds of

the aeroplanes for which the taxiway is intended. The design of the curve shall be such that, when the cockpit of the aeroplane remains over the taxiway centre line markings, the clearance distance between the outer main wheels of the aeroplane and the edge of the taxiway shall not be less than those specified in 3.9.3.

**Note 1:** An example of widening taxiways to achieve the wheel clearance specified is illustrated in Figure 3-2. Guidance on the values of suitable dimensions is given in the Aerodrome Design Manual (Doc 9157), Part 2.

**Note 2:** The location of taxiway centre line markings and lights is specified in 5.2.8.6 and 5.3.17.12.

**Note 3:** Compound curves may reduce or eliminate the need for extra taxiway width.

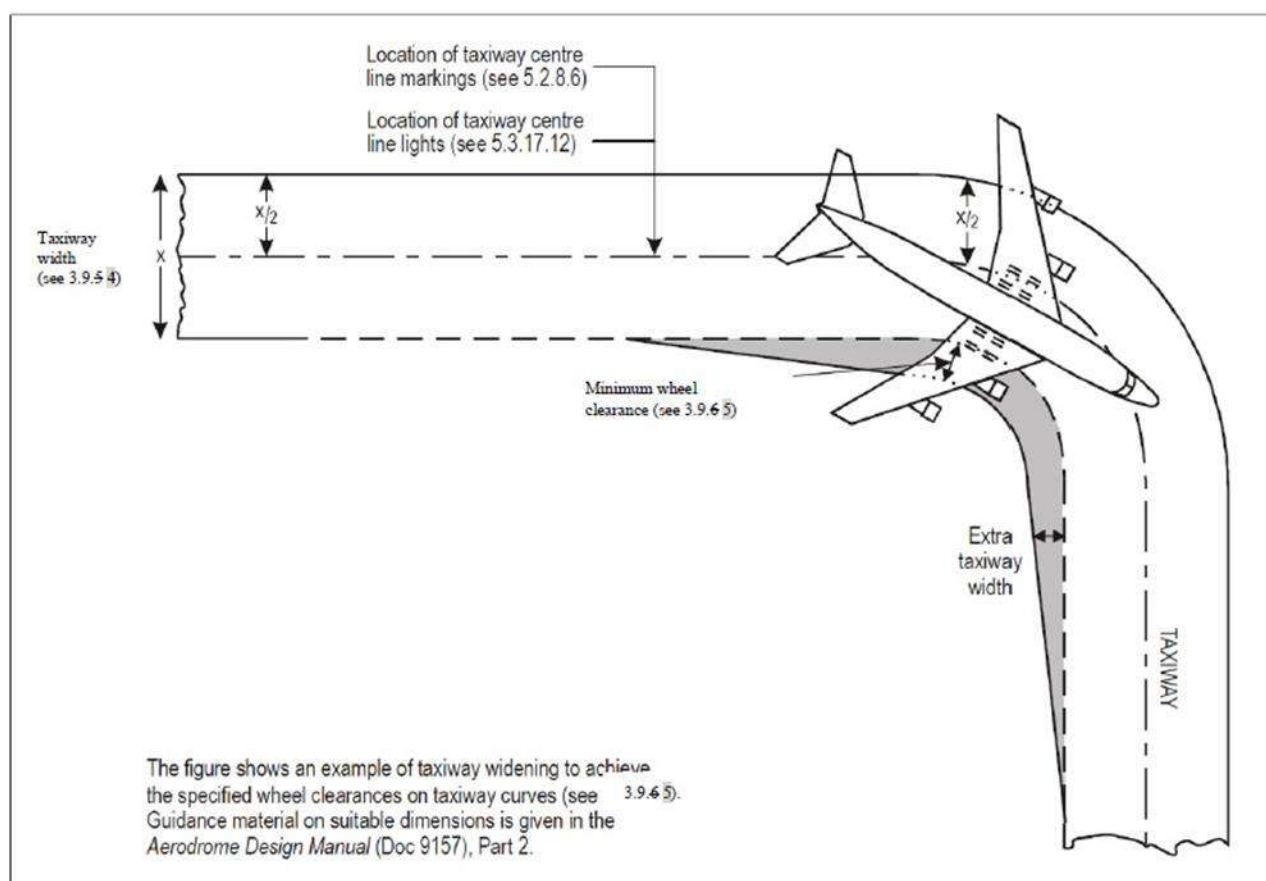

**Figure 3.2. Taxiway curve**

## Junctions and intersections

**3.9.6** To facilitate the movement of aeroplanes, fillets shall be provided at junctions and intersections of taxiways with runways, aprons and other taxiways. The design of the fillets shall ensure that the minimum wheel clearances specified in 3.9.3 are maintained when aeroplanes are manoeuvring through the junctions or intersections.

**Note:** Consideration will have to be given to the aeroplane datum length when designing fillets. Guidance on the design of fillets and the definition of the term aeroplane datum length are given in the Aerodrome Design Manual (Doc 9157), Part 2.

### **Taxiway minimum separation distances**

**3.9.7** The separation distance between the centre line of a taxiway and the centre line of a runway, the centre line of a parallel taxiway or an object shall not be less than the appropriate dimension specified in Table 3-1, except that it may be permissible to operate with lower separation distances at an existing aerodrome if an aeronautical study indicates that such lower separation distances would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.

**Note 1:** Guidance on factors which may be considered in the aeronautical study is given in the Aerodrome Design Manual (Doc 9157), Part 2.

**Note 2:** ILS and MLS installations may also influence the location of taxiways due to interferences to ILS and MLS signals by a taxiing or stopped aircraft. Information on critical and sensitive areas surrounding ILS and MLS installations is contained in Annex 10, Volume I, Attachments C and G (respectively).

**Note 3:** The separation distances of Table 3-1, column 10, do not necessarily provide the capability of making a normal turn from one taxiway to another parallel taxiway. Guidance for this condition is given in the Aerodrome Design Manual (Doc 9157), Part 2.

**Note 4:** The separation distance between the centre line of an aircraft stand taxilane and an object shown in Table 3-1, column 12, may need to be increased when jet exhaust wake velocity may cause hazardous conditions for ground servicing.

### **Slopes on taxiways**

#### **3.9.8 Longitudinal slopes**

The longitudinal slope of a taxiway shall not exceed:

- 1.5 per cent where the code letter is C, D, E or F; and
- Per cent where the code letter is A or B.

#### **3.9.9 Longitudinal slope changes**

Where slope changes on a taxiway cannot be avoided, the transition from one slope to another slope shall be accomplished by a curved surface with a rate of change not exceeding:

- 1 per cent per 30 m (minimum radius of curvature of 3 000 m) where the code letter is C, D, E or F; and
- 1 per cent per 25 m (minimum radius of curvature of 2 500 m) where the code letter is A or B

**Table 3-1 Taxiway minimum separation distances**

Distance between taxiway centre line and runway centre line (metres)												
Code letter (1)	Instrument runways				Non-instrument runways				Taxiway centre line to taxiway centre line (metres)	Taxiway, other than aircraft stand taxilane, centre line to object (metres)	Aircraft stand taxilane centre line to aircraft stand taxilane centre line (metres)	Aircraft stand taxilane centre line to object (metres)
	1 (2)	2 (3)	3 (4)	4 (5)	1 (6)	2 (7)	3 (8)	4 (9)	(10)	(11)	(12)	(13)
A	77.5	77.5	-	-	37.5	47.5	-	-	23	15.5	19.5	12
B	82	82	152	-	42	52	87	-	32	20	28.5	16.5
C	88	88	158	-	48	58	93	93	44	26	40.5	22.5
D	-	-	166	176	-	-	101	101	63	37	59.5	33.5
E	-	-	172.5	172.5	-	-	107.5	107.5	76	43.5	72.5	40
F	-	-	180	180	-	-	115	115	91	51	87.5	47.5

**3.9.10 Sight distance**

Where a change in slope on a taxiway cannot be avoided, the change shall be such that, from any point:

- 3m above the taxiway, it will be possible to see the whole surface of the taxiway for a distance of at least 300 m from that point, where the code letter is C, D, E or F;
- 2m above the taxiway, it will be possible to see the whole surface of the taxiway for a distance of at least 200 m from that point, where the code letter is B; and
- 1.5 m above the taxiway, it will be possible to see the whole surface of the taxiway for a distance of at least 150 m from that point, where the code letter is A.

**3.9.11 Transverse slopes**

The transverse slopes of a taxiway shall be sufficient to prevent the accumulation of water on the surface of the taxiway but shall not exceed:

- 1.5 per cent where the code letter is C, D, E or F; and
- 2 per cent where the code letter is A or B.

**Note:** See 3.13.4 regarding transverse slopes on an aircraft stand taxilane

**Strength of taxiways**

**3.9.12** The strength of a taxiway shall be at least equal to that of the runway it serves, due consideration being given to the fact that a taxiway will be subjected to a greater density of traffic and, as a result of slow moving and stationary aeroplanes, to higher stresses than the runway it serves.

**Note:** Guidance on the relation of the strength of taxiways to the strength of runways is given in the Aerodrome Design Manual (Doc 9157), Part 3.

**Surface of taxiways**

**3.9.13** The surface of a taxiway shall not have irregularities that cause damage to aeroplane structures.

**3.9.14** The surface of a paved taxiway shall be so constructed or resurfaced as to provide suitable surface friction characteristics.

**Note:** Suitable surface friction characteristics are those surface properties required on taxiways that assure safe operation of aeroplanes.

### Rapid exit taxiways

**Note:** The following specifications detail requirements particular to rapid exit taxiways. See Figure 3-3. General requirements for taxiways also apply to this type of taxiway. Guidance on the provision, location and design of rapid exit taxiways is included in the Aerodrome Design Manual (Doc 9157), Part 2.

**3.9.15** A rapid exit taxiway shall be designed with a radius of turn-off curve of at least:

- 550 m where the code number is 3 or 4; and
- 275 m where the code number is 1 or 2;

To enable exit speeds under wet conditions of:


- 93 km/h where the code number is 3 or 4; and
- 65 km/h where the code number is 1 or 2.

**Note:** The locations of rapid exit taxiways along a runway are based on several criteria described in the Aerodrome Design Manual (Doc 9157), Part 2, in addition to different speed criteria.

**3.9.16** The radius of the fillet on the inside of the curve at a rapid exit taxiway shall be sufficient to provide a widened taxiway throat in order to facilitate early recognition of the entrance and turn-off onto the taxiway.

**3.9.17** A rapid exit taxiway shall include a straight distance after the turn-off curve sufficient for an exiting aircraft to come to a full stop clear of any intersecting taxiway.

**3.9.18** The intersection angle of a rapid exit taxiway with the runway shall not be greater than 45° nor less than 25° and preferably shall be 30°.

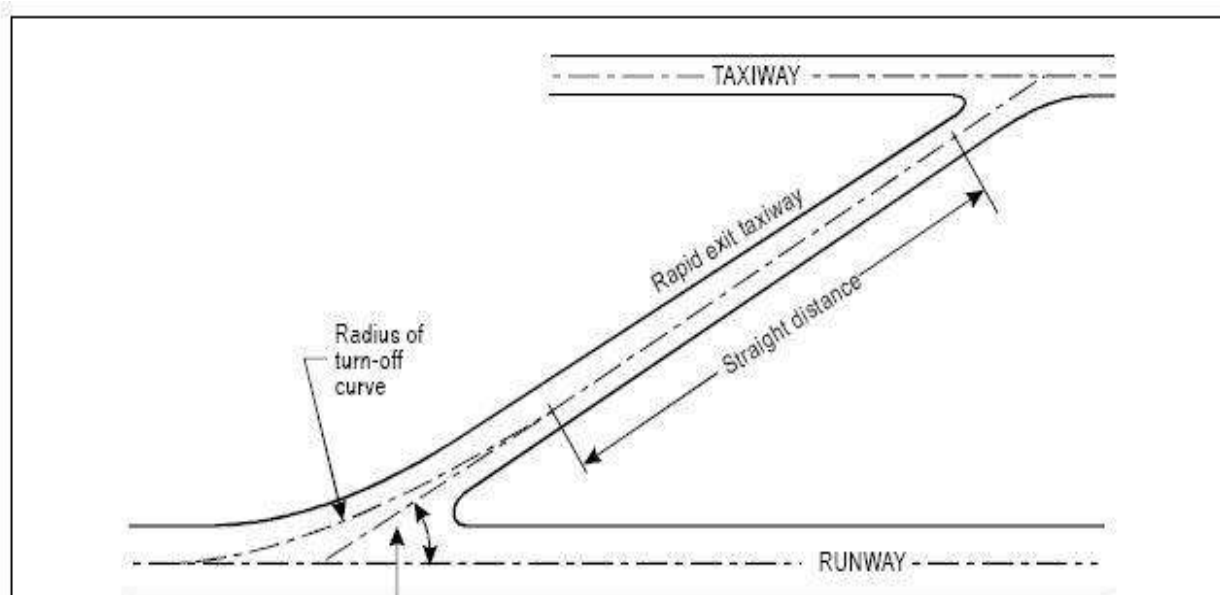

### **Taxiways on bridges**

**3.9.19** The width of that portion of a taxiway bridge capable of supporting aeroplanes, as measured perpendicularly to the taxiway centre line, shall not be less than the width of the graded area of the strip provided for that taxiway, unless a proven method of lateral restraint is provided which shall not be hazardous for aeroplanes for which the taxiway is intended.

**3.9.20** Access shall be provided to allow rescue and fire fighting vehicles to intervene in both directions within the specified response time to the largest aeroplane for which the taxiway bridge is intended.

***Note:*** *If aeroplane engines overhang the bridge structure, protection of adjacent areas below the bridge from engine blast may be required.*

**3.9.21** A bridge shall be constructed on a straight section of the taxiway with a straight section on both ends of the bridge to facilitate the alignment of aeroplanes approaching the bridge.

### **3.10 Taxiway shoulders**

***Note:*** *Guidance on characteristics of taxiway shoulders and on shoulder treatment is given in the Aerodrome Design Manual (Doc 9157), Part 2.*

**3.10.1** Straight portions of a taxiway where the code letter is C, D, E or F shall be provided with shoulders which extend symmetrically on each side of the taxiway so that the overall width of the taxiway and its shoulders on straight portions is not less than:

- 44 m where the code letter is F;
- 38 m where the code letter is E;
- 34 m where the code letter is D; and
- 25 m where the code letter is C.

On taxiway curves and on junctions or intersections where increased pavement is provided, the shoulder width shall be not less than that on the adjacent straight portions of the taxiway.

**3.10.2** When a taxiway is intended to be used by turbine-engined aeroplanes, the surface of the taxiway shoulder shall be so prepared as to resist erosion and the ingestion of the surface material by aeroplane engines.

### **3.11 Taxiway strips**

**Note:** *Guidance on characteristics of taxiway strips is given in the Aerodrome Design Manual (Doc 9157), Part 2.*

## General

**3.11.1** A taxiway, other than an aircraft stand taxiway, shall be included in a strip.

### Width of taxiway strips

**3.11.2** A taxiway strip shall extend symmetrically on each side of the centre line of the taxiway throughout the length of the taxiway to at least the distance from the centre line given in Table 3-1, column 11.

### Objects on taxiway strips

**Note:** See 9.9 for information regarding siting of equipment and installations on taxiway strips.

**3.11.3** The taxiway strip shall provide an area clear of objects which may endanger taxiing aeroplanes.

**Note 1:** Consideration will have to be given to the location and design of drains on a taxiway strip to prevent damage to an aeroplane accidentally running off a taxiway. Suitably designed drain covers may be required. For further guidance, see the Aerodrome Design Manual (Doc 9157), Part 2.

**Note 2:** Where open-air or covered storm water conveyances are installed, consideration will have to be given to ensure that their structure do not extend above the surrounding ground so as not to be considered an obstacle. See also Note 1 to 3.11.6.

**Note 3:** Particular attention needs to be given to the design and maintenance of an open-air storm water conveyance in order to prevent wildlife attraction, notably birds. If needed, it can be covered by a net. Guidance on Wildlife Control and Reduction can be found in the Airport Services Manual (Doc 9137), Part 3.

### Grading of taxiway strips

**3.11.4** The centre portion of a taxiway strip shall provide a graded area to a distance from the centre line of the taxiway of not less than that given by the following tabulation:

- 10.25 m where the OMGWS is up to but not including 4.5 m
- 11 m where the OMGWS is 4.5 m up to but not including 6 m
- 12.50 m where the OMGWS is 6 m up to but not including 9 m
- 18.50 m where the OMGWS is 9 m up to but not including 15 m, where the code letter is D
- 19 m where the OMGWS is 9 m up to but not including 15 m, where the code letter is E
- 22 m where the OMGWS is 9 m up to but not including 15 m, where the code letter is F

**Note:** Guidance on width of the graded portion of a taxiway is given in the Aerodrome Design Manual (Doc 9157), Part 2.



### Slopes on taxiway strips

**3.11.5** The surface of the strip shall be flush at the edge of the taxiway or shoulder, if provided, and the graded portion shall not have an upward transverse slope exceeding:

- 2.5 per cent for strips where the code letter is C, D, E or F; and
- 3 per cent for strips of taxiways where the code letter is A or B;

The upward slope being measured with reference to the transverse slope of the adjacent taxiway surface and not the horizontal. The downward transverse slope shall not exceed 5 per cent measured with reference to the horizontal.

**3.11.6** The transverse slopes on any portion of a taxiway strip beyond that to be graded shall not exceed an upward or downward slope of 5 per cent as measured in the direction away from the taxiway.

**Note 1:** *Where deemed necessary for proper drainage, an open-air storm water conveyance may be allowed in the non-graded portion of a taxiway strip and would be placed as far as practicable from the taxiway.*

**Note 2:** *The aerodrome RFF procedure would need to take into account the location of open-air storm water conveyances within the non-graded portion of a taxiway strip.*

### 3.12 Holding bays, runway-holding positions, intermediate holding positions and road-holding positions

#### General

**3.12.1** Holding bay(s) shall be provided when justified by high traffic volume.

**3.12.2** A runway-holding position or positions shall be established:

- a) On the taxiway, at the intersection of a taxiway and a runway; and
- b) At an intersection of a runway with another runway when the former runway is part of a standard taxi-route.

**3.12.3** A runway-holding position shall be established on a taxiway if the location or alignment of the taxiway is such that a taxiing aircraft or vehicle can infringe an obstacle limitation surface or interfere with the operation of radio navigation aids.

**3.12.4** An intermediate holding position shall be established on a taxiway at any point other than a runway-holding position where it is desirable to define a specific holding limit.

**3.12.5** A road-holding position shall be established at an intersection of a road with a runway.

#### Location

**3.12.6** The distance between a holding bay, runway-holding position established at a taxiway/runway intersection or road-holding position and the centre line of a runway shall

be in accordance with Table 3-2 and, in the case of a precision approach runway, such that a holding aircraft or vehicle will not interfere with the operation of radio navigation aids.

**3.12.7** At elevations greater than 700 m (2 300 ft) the distance of 90 m specified in Table 3-2 for a precision approach runway code number 4 shall be increased as follows:

- a) up to an elevation of 2 000 m (6 600 ft); 1 m for every 100 m (330 ft) in excess of 700 m (2 300 ft);
- b) elevation in excess of 2 000 m (6 600 ft) and up to 4 000 m (13 320 ft); 13 m plus 1.5 m for every 100 m (330 ft) in excess of 2 000 m (6 600 ft); and
- c) elevation in excess of 4 000 m (13 320 ft) and up to 5 000 m (16 650 ft); 43 m plus 2 m for every 100 m (330 ft) in excess of 4 000 m (13 320 ft).

**3.12.8** If a holding bay, runway-holding position or road-holding position for a precision approach runway code number 4 is at a greater elevation compared to the threshold, the distance of 90 m or 107.5 m, as appropriate, specified in Table 3-2 shall be further increased 5 m for every metre the bay or position is higher than the threshold.

**3.12.9** The location of a runway-holding position established in accordance with 3.12.3 shall be such that a holding aircraft or vehicle will not infringe the obstacle free zone, approach surface, take-off climb surface or ILS/MLS critical/ sensitive area or interfere with the operation of radio navigation aids.

**Table 3-2 Minimum distance from the runway centre line  
to a holding bay, runway-holding position or road-holding position**

Type of runway	Code Number			
	1	2	3	4
Non-instrument	30 m	40 m	75 m	75 m
Non-precision approach	40 m	40 m	75 m	75 m
Precision approach category I	60 m (b)	60 m (b)	90 m (a,b)	90 m (a,b,c)
Precision approach categories II and III	-	-	90 m (a,b)	90 m (a,b,c)
Take-off runway	30 m	40 m	75 m	75 m

- a. If a holding bay, runway-holding position or road-holding position is at a lower elevation compared to the threshold, the distance may be decreased 5 m for every metre the bay or holding position is lower than the threshold, contingent upon not infringing the inner transitional surface.
- b. This distance may need to be increased to avoid interference with radio navigation aids, particularly the glide path and localizer facilities. Information on critical and sensitive areas of ILS and MLS is contained in Annex 10, Volume I, Attachments C and G, respectively (see also 3.12.6).

*Note 1.— The distance of 90 m for code number 3 or 4 is based on an aircraft with a tail height of 20 m, a distance from the nose to the highest part of the tail of 52.7 m and a nose height of 10 m holding at an angle of 45° or more with respect to the runway centre line, being clear of the obstacle free zone and not accountable for the calculation of OCA/H.*

*Note 2.— The distance of 60 m for code number 2 is based on an aircraft with a tail height of 8 m, a distance from the nose to the highest part of the tail of 24.6 m and a nose height of 5.2 m holding at an angle of 45° or more with respect to the runway centre line, being clear of the obstacle free zone.*

- c. Where the code letter is F, this distance should be 107.5 m.

*Note.— The distance of 107.5 m for code number 4 where the code letter is F is based on an aircraft with a tail height of 24 m, a distance from the nose to the highest part of the tail of 62.2 m and a nose height of 10 m holding at an angle of 45° or more with respect to the runway centre line, being clear of the obstacle free zone.*

## 3.13 Aprons

### General

**3.13.1** Aprons shall be provided where necessary to permit the on - and off-loading of passengers, cargo or mail as well as the servicing of aircraft without interfering with the aerodrome traffic.

### Size of aprons

**3.13.2** The total apron area shall be adequate to permit expeditious handling of the aerodrome traffic at its maximum anticipated density.

### Strength of aprons

**3.13.3** Each part of an apron shall be capable of withstanding the traffic of the aircraft it is intended to serve, due consideration being given to the fact that some portions of the apron will be subjected to a higher density of traffic and, as a result of slow moving or stationary aircraft, to higher stresses than a runway.

## Slopes on aprons

**3.13.4** Slopes on an apron, including those on an aircraft stand taxilane, shall be sufficient prevent accumulation of water on the surface of the apron but shall be kept as level as drainage requirements permit.

**3.13.5** On an aircraft stand the maximum slope shall not exceed 1.0 per cent.

## Clearance distances on aircraft stands

**3.13.6** An aircraft stand shall provide the following minimum clearances between an aircraft entering or exiting the stand and any adjacent building, aircraft on another stand and other objects:

Code letter	Clearance
A	3 m
B	3 m
C	4.5 m
D	7.5 m
E	7.5 m
F	7.5 m


When special circumstances so warrant, these clearances may be reduced at a nose-in aircraft stand, where the code letter is D, E or F:

- a) Between the terminal, including any fixed passenger bridge, and the nose of an aircraft; and
- b) Over any portion of the stand provided with azimuth guidance by a visual docking guidance system.

**Note:** *On aprons, consideration also has to be given to the provision of service roads and to manoeuvring and storage area for ground equipment (see the Aerodrome Design Manual (Doc 9157), Part 2, for guidance on storage of ground equipment).*

## 3.14 Isolated aircraft parking position

**3.14.1** An isolated aircraft parking position shall be designated or the aerodrome control tower shall be advised of an area or areas suitable for the parking of an aircraft which is known or believed to be the subject of unlawful interference, or which for other reasons needs isolation from normal aerodrome activities. Where and dedicated area is designated as the isolated aircraft parking position, it shall be in accordance with the layout shown in the illustration below, unless otherwise approved by PACA.

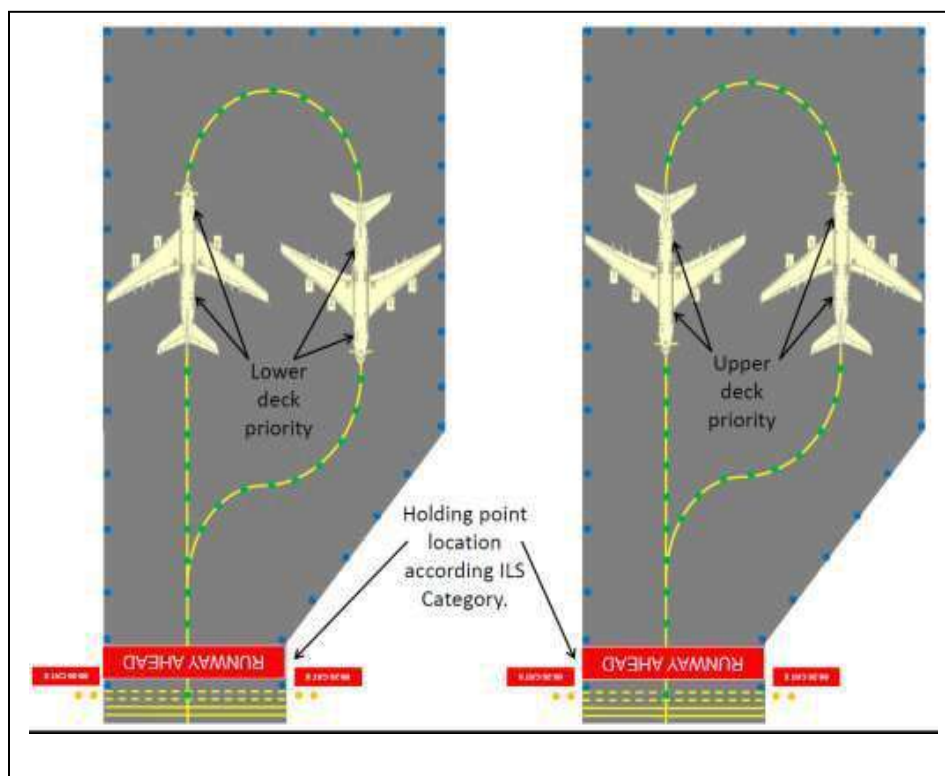

**3.14.2** The isolated aircraft parking position shall be located at the maximum distance practicable and in any case never less than 400 m from other parking positions, buildings or public areas, etc. unless otherwise approved by the Public Authority for Civil Aviation (DGCA). Care shall be taken to ensure that the position is not located over underground utilities such as gas and aviation fuel and, to the extent feasible, electrical or communication cables.

**Note:** Further information and specification with respect to the isolated aircraft parking position shall be found in the respective ICAO annexes and manuals with respect to security.

## CHAPTER 4 - OBSTACLE RESTRICTION AND REMOVAL

### *Introductory Note:*

*The objectives of the specifications in this chapter are to define the airspace around aerodromes to be maintained free from obstacles in order to minimize the dangers presented by obstacles to an aircraft so as to permit the intended aeroplane operations at the aerodromes to be conducted safely and to prevent the aerodrome from becoming unusable by the growth of obstacles around the aerodrome, the effective utilisation of an aerodrome being considerably influenced by natural features and man-made constructions inside and outside its boundary. These may result in limitations on the distance available for take-off and landing and on the range of meteorological conditions in which take-off and landing can be undertaken. For these reasons, certain areas of the local airspace must be regarded as integral parts of the aerodrome environment.*

*The method of assessing the significance of any existing or proposed object within the aerodrome boundary or in the vicinity of the aerodrome is to establish defined obstacle limitation surfaces particular to a runway and its intended use. The purpose of this chapter is to define these obstacle limitation surfaces and their characteristics and describe the action to be taken in respect of objects which infringe them. In ideal circumstances all the surfaces will be free from obstacles but when a surface is infringed, any safety measures required by the certifying authority will have regard to:*

- a. The nature of the obstacle and its location relative to the surface origin, to the extended centreline of the runway or normal approach and departure paths and to existing obstructions;
- b. The amount by which the surface is infringed;
- c. The gradient presented by the obstacle to the surface origin;
- d. The type of air traffic at the aerodrome; and
- e. The instrument approach procedures published for the aerodrome.
- f. Safety measures could be as follows:
  - Promulgation in the Oman AIP of appropriate information;
  - Marking and/or lighting of the obstacle;
  - Variation of the runway distances declared as available;
  - Limitation of the use of the runway to visual approaches only;
  - Restrictions on the type of traffic.

In addition to the requirements described in this chapter it may be necessary to call for other restrictions to development on and in the vicinity of the aerodrome in order to protect the performance of visual and electronic aids to navigation and to ensure that such development does not adversely affect instrument approach procedures and the associated obstacle clearance limits. All construction within the OLS shall have prior approval from PACA prior to design/construction. An aerodrome operator shall communicate with PACA to establish the required OLS for their aerodrome as stipulated in this regulation.

## 4.1 Obstacle limitation surfaces

**Note:** See Figure 4-1.

### Outer horizontal surface

An outer horizontal surface shall be established at an aerodrome, unless agreed with PACA that is not required. The dimension and elevation of the outer horizontal surface shall have a height of 150 m and a radius of 15000 m (of the aerodrome reference point) for aerodrome reference code 3 and 4.

### Conical surface

**4.1.1** Description- Conical surface: A surface sloping upwards and outwards from the periphery of the inner horizontal surface.

**4.1.2** Characteristics -The limits of the conical surface shall comprise:

- a) Lower edge coincident with the periphery of the inner horizontal surface; and
- b) An upper edge located at a specific height above the inner horizontal surface.

**4.1.3** The slope of the conical surface shall be measured in a vertical plane perpendicular to the periphery of the inner horizontal surface.

**Note:** Dimensions and slopes of the conical surface shall be as specified in table 4-1.

### Inner horizontal surface

**4.1.4** Description- Inner horizontal surface: A surface located in a horizontal plane above an aerodrome and its environs.

**4.1.5** Characteristics- The radius or outer limits of the inner horizontal surface shall be measured in an arc radius from each runway end, joined tangentially by straight lines.

**4.1.6** The height of the inner horizontal surface shall be measured above an elevation of the lowest touchdown zone existing or planned for all runways on the aerodrome, thereby using a common elevation for an aerodrome with multiple runways.

**Note:** Dimensions and slopes of the inner horizontal surface shall be as specified in table 4-1.

### Approach surface

**4.1.7** Description- Approach surface: An inclined plane or combination of planes preceding the threshold.

**4.1.8** Characteristics-The limits of the approach surface shall comprise:

- a) An inner edge of specified length, horizontal and perpendicular to the extended centre line of the runway and located at a specified distance before the threshold coincident with the landing runway strip;
- b) Two sides originating at the ends of the inner edge and diverging uniformly at a specified rate from the extended centre line of the runway;
- c) An outer edge parallel to the inner edge; and
- d) The above surfaces shall be varied when lateral offset, offset or curved approaches are utilized, specifically, two sides originating at the ends of the inner edge and diverging uniformly at a specified rate from the extended centre line of the lateral offset, offset or curved ground track.

**4.1.9** The elevation of the inner edge shall be equal to the elevation of the midpoint of the threshold.

**4.1.10** The slope(s) of the approach surface shall be measured in the vertical plane containing the centre line of the runway and shall continue containing the centre line of any lateral offset or curved ground track.

**Note:** *Dimensions and slopes of the approach surface shall be as specified in table 4-1.*

**Note:** *See Figure 4-2.*

### **Inner approach surface**

**4.1.11** Description- Inner approach surface: A rectangular portion of the approach surface immediately preceding the threshold.

**4.1.12** Characteristics. — The limits of the inner approach surface shall comprise:

- a) An inner edge coincident with the location of the inner edge of the approach surface but of its own specified length;
- b) Two sides originating at the ends of the inner edge and extending parallel to the vertical plane containing the centre line of the runway; and
- c) An outer edge parallel to the inner edge.

**Note:** *Dimensions and slopes of the inner approach surface shall be as specified in table 4-1.*



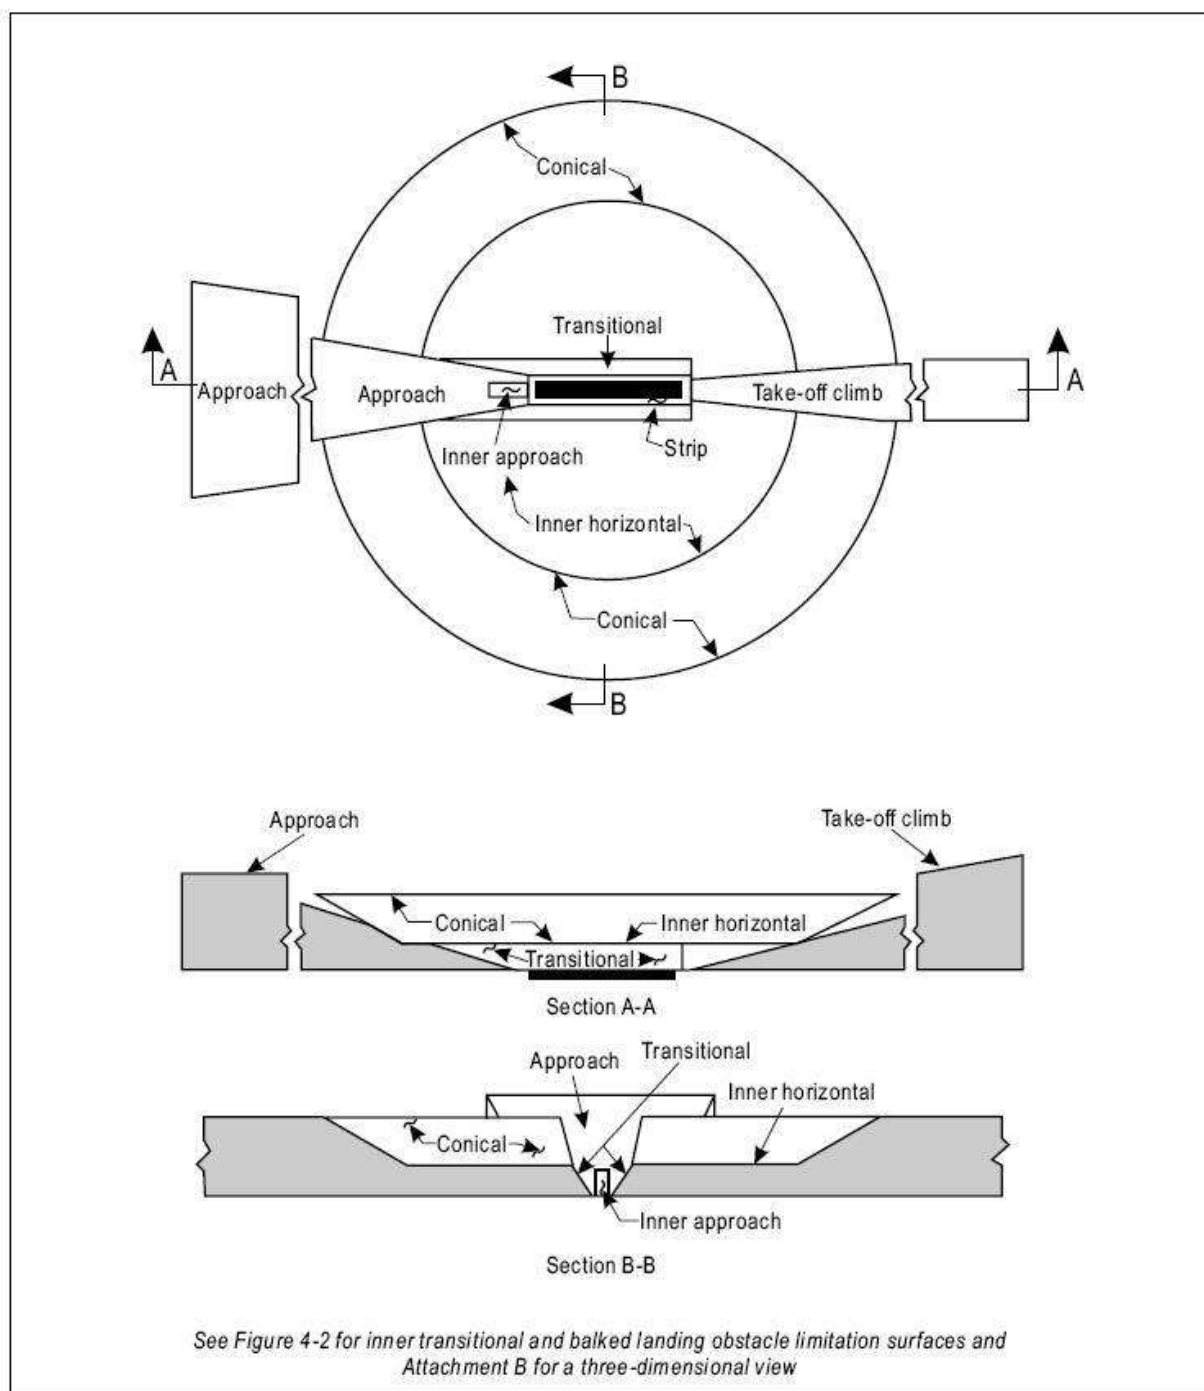


Figure 4-1. Obstacle limitation surfaces

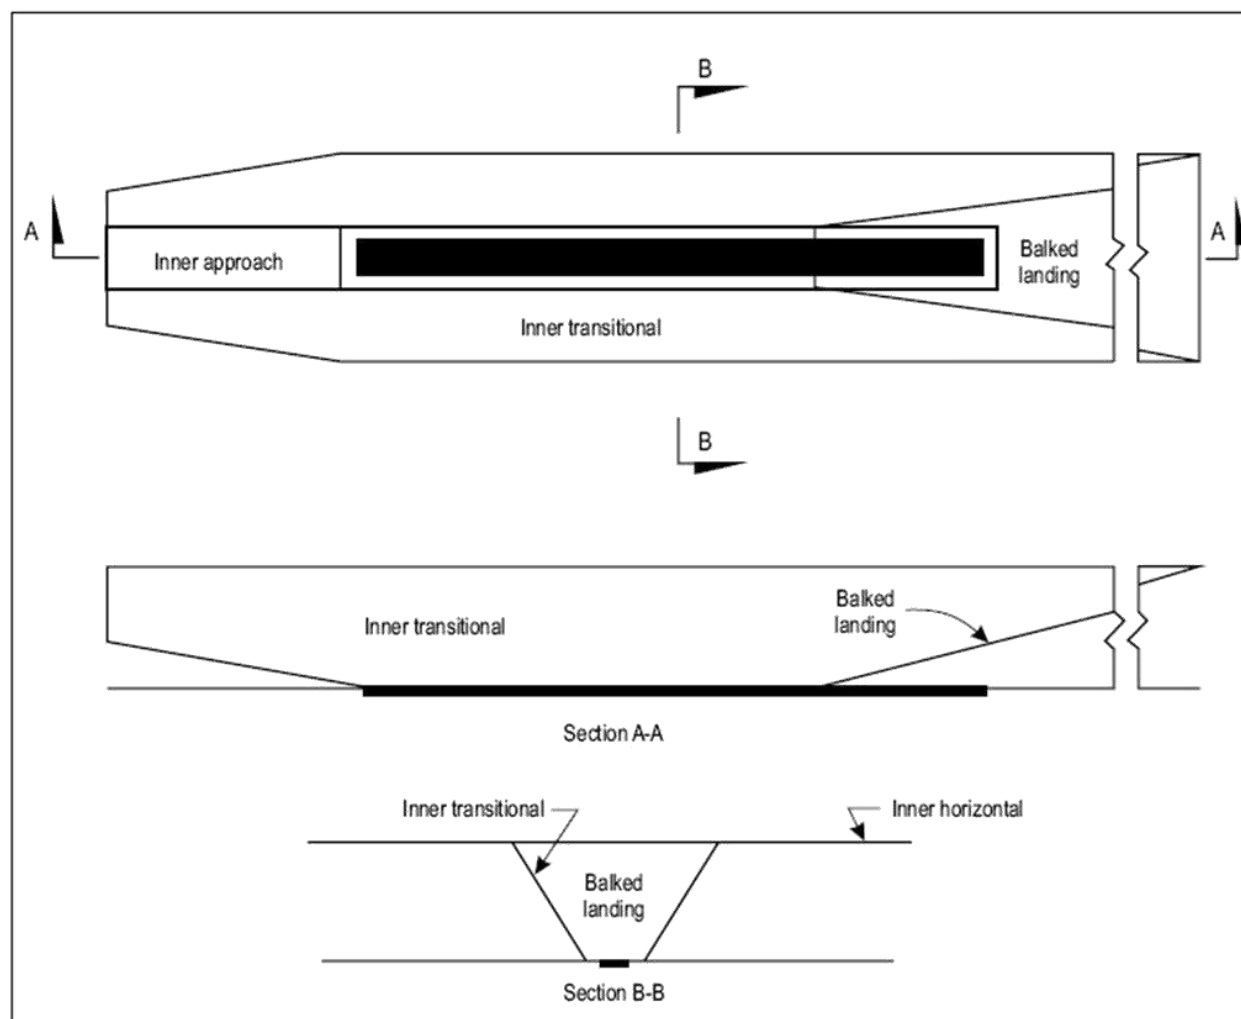


Figure 4-2. Inner approach, inner transitional and balked landing obstacle limitation surfaces

### Transitional surface

**4.1.13** Description-Transitional surface: Intended to be the controlling obstacle limitation for buildings, etc., and is a complex surface along the side of the strip and part of the side of the approach surface, that slopes upwards and outwards to the inner horizontal surface.

**4.1.14** Characteristics-The limits of a transitional surface shall comprise:

- a) A lower edge beginning at the intersection of the side of the approach surface with the inner horizontal surface and extending down the side of the approach surface to the inner edge of the approach surface and from there along the length of the strip parallel to the runway centre line; and

- b) An upper edge located in the plane of the inner horizontal surface.

**4.1.15** The elevation of a point on the lower edge shall be:

- a) Along the side of the approach surface — equal to the elevation of the approach surface at that point; and
- b) Along the strip — equal to the elevation of the nearest point on the centre line of the runway or its extension, thereby, unless the runway is level, the lower edge of the transitional surface portion along the runway strip shall follow the runway profile, causing the upper edge to be curved where it joins the inner horizontal surface.

**4.1.16** The slope of the transitional surface shall be measured in a vertical plane at right angles to the centre line of the runway.

**Note:** *Dimensions and slopes of the transitional surface shall be as specified in table 4-1.*

### **Inner transitional surface**

**4.1.17** Description- Inner transitional surface: A surface similar to the transitional surface but closer to the runway intended to be the controlling obstacle limitation surface for navigation aids, aircraft and other vehicles that must be near the runway and which shall not to be penetrated except for frangible objects.

**4.1.18** Characteristics- The limits of an inner transitional surface shall comprise:

- a) A lower edge beginning at the end of the inner approach surface and extending down the side of the inner approach surface to the inner edge of that surface, from there along the strip parallel to the runway centre line to the inner edge of the balked landing surface and from there up the side of the balked landing surface to the point where the side intersects the inner horizontal surface; and
- b) An upper edge located in the plane of the inner horizontal surface.

**4.1.19** The elevation of a point on the lower edge shall be:

- a) Along the side of the inner approach surface and balked landing surface — equal to the elevation of the particular surface at that point; and
- b) Along the strip — equal to the elevation of the nearest point on the centre line of the runway or its extension.

**Note:** *As a result of b) the inner transitional surface along the strip will be curved if the runway profile is curved or a plane if the runway profile is a straight line. The intersection of the inner transitional surface with the inner horizontal surface will also be a curved or straight line depending on the runway profile.*

**4.1.20** The slope of the inner transitional surface shall be measured in a vertical plane at right angles to the centre line of the runway.

**Note:** Dimensions and slopes of the inner transitional surface shall be as specified in table 4-1.

### **Balked landing surface**

**4.1.21** Description- Balked landing surface: An inclined plane located at a specified distance after the threshold, extending between the inner transitional surface.

**4.1.22** Characteristics- The limits of the balked landing surface shall comprise:

- a) An inner edge horizontal and perpendicular to the centre line of the runway and located at a specified distance after the threshold;
- b) Two sides originating at the ends of the inner edge and diverging uniformly at a specified rate from the vertical plane containing the centre line of the runway; and
- c) An outer edge parallel to the inner edge and located in the plane of the inner horizontal surface.

**4.1.23** The elevation of the inner edge shall be equal to the elevation of the runway centre line at the location of the inner edge.

**4.1.24** The slope of the balked landing surface shall be measured in the vertical plane containing the centre line of the runway.

**Note:** Dimensions and slopes of the balked landing surface shall be as specified in table 4-1.

### **Take-off climb surface**

**4.1.25** Description- Take-off climb surface: An inclined plane or other specified surface beyond the end of a runway or clearway.

**4.1.26** Characteristics- The limits of the take-off climb surface shall comprise:

- a) An inner edge horizontal and perpendicular to the centre line of the runway and located either at a specified distance beyond the end of the runway or at the end of the clearway when such is provided and its length exceeds the specified distance;
- b) Two sides originating at the ends of the inner edge, diverging uniformly at a specified rate from the take-off track to a specified final width and continuing thereafter at that width for the remainder of the length of the take-off climb surface; and
- c) An outer edge horizontal and perpendicular to the specified take-off track.

**4.1.27** The elevation of the inner edge shall be equal to the highest point on the extended runway centre line between the end of the runway and the inner edge, except that when a clearway is provided the elevation shall be equal to the highest point on the ground on the centre line of the clearway.

- 4.1.28** In the case of a straight take-off flight path, the slope of the take-off climb surface shall be measured in the vertical plane containing the centre line of the runway.
- 4.1.29** In the case of a take-off flight path involving a turn, the take-off climb surface shall be a complex surface containing the horizontal normals to its centre line, and the slope of the centre line shall be the same as that for a straight take-off flight path.

## 4.2 Obstacle limitation requirements

**Note:** *The requirements for obstacle limitation surfaces are specified on the basis of the intended use of a runway, i.e. take-off or landing and type of approach, and are intended to be applied when such use is made of the runway. In cases where operations are conducted to or from both directions of a runway, then the function of certain surfaces may be nullified because of more stringent requirements of another lower surface.*

### Non-instrument runways

- 4.2.1** The following obstacle limitation surfaces shall be established for a non-instrument runway:
- Conical surface;
  - Inner horizontal surface;
  - Approach surface; and
  - Transitional surfaces.
- 4.2.2** The heights and slopes of the surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 4-1.
- 4.2.3** New objects or extensions of existing objects shall not be permitted above an approach or transitional surface except when, in the opinion of PACA, the new object or extension would be shielded by an existing immovable object.

**Note:** *Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.*

- 4.2.4** New objects or extensions of existing objects shall not be permitted above the conical surface or inner horizontal surface or outer horizontal surface except when, in the opinion of PACA, the object would be shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.
- 4.2.5** Existing objects above any of the surfaces required by 4.2.1 shall as far as practicable be removed except when, in the opinion of PACA, the object is shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.

**Note:** *Because of transverse or longitudinal slopes on a strip, in certain cases the inner edge or portions of the inner edge of the approach surface may be below the corresponding elevation of*

*the strip. It is not intended that the strip be graded to conform with the inner edge of the approach surface, nor is it intended that terrain or objects which are above the approach surface beyond the end of the strip, but below the level of the strip, be removed unless it is considered they may endanger aeroplanes.*

- 4.2.6** In considering proposed construction, account shall be taken of the possible future development of an instrument runway and consequent requirement for more stringent obstacle limitation surfaces.

### **Non-precision approach runways**

- 4.2.7** The following obstacle limitation surfaces shall be established for a non-precision approach runway:

- Conical surface;
- Inner horizontal surface;
- Approach surface; and
- Transitional surfaces.

- 4.2.8** The heights and slopes of the surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 4-1, except in the case of the horizontal section of the approach surface (see 4.2.9).

- 4.2.9** The approach surface shall be horizontal beyond the point at which the 2.5 per cent slope intersects:

- a) A horizontal plane 150 m above the threshold elevation; or
- b) The horizontal plane passing through the top of any object that governs the obstacle clearance altitude/height (OCA/H); whichever is the higher.

- 4.2.10** New objects or extensions of existing objects shall not be permitted above an approach surface within 3 000 m of the inner edge or above a transitional surface except when, in the opinion of PACA, the new object or extension would be shielded by an existing immovable object.

**Note:** *Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.*

- 4.2.11** New objects or extensions of existing objects shall not be permitted above the approach surface beyond 3000 m from the inner edge, the conical surface or inner horizontal surface or outer horizontal surface except when, in the opinion of PACA, the object would be shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.

- 4.2.12** Existing objects above any of the surfaces required by 4.2.7 shall as far as practicable be removed except when, in the opinion of PACA, the object is shielded by an existing

immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.

**Note:** Because of transverse or longitudinal slopes on a strip, in certain cases the inner edge or portions of the inner edge of the approach surface may be below the corresponding elevation of the strip. It is not intended that the strip be graded to conform with the inner edge of the approach surface, nor is it intended that terrain or objects which are above the approach surface beyond the end of the strip, but below the level of the strip, be removed unless it is considered they may endanger aeroplanes.

	<b>APPROCH RUNWYS RUNWAY CLASSIFICATION</b>									
	Non instrument Code number				Non- Precision approach Code number			Precision approach category		
								I Code number	II or III Code number	
<b>Surface and dimensions (a)</b> (1)	1 (2)	2 (3)	3 (4)	4 (5)	1,2 (6)	3 (7)	4 (8)	1,2 (9)	3,4 (10)	3,4 (11)
<b>CONICAL</b>										
Slope	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Height	35 m	55 m	75 m	100 m	60 m	75 m	100 m	60 m	100 m	100 m
<b>INNER HORIZONTAL</b>										
Slope	45 m	45 m	45 m	45 m	45 m	45 m	45 m	45 m	45 m	45 m
Radius	2000 m	2500 m	4000m	4000 m	3500 m	4000 m	4000 m	3500 m	4000 m	4000 m
<b>INNER APPROACH</b>										
Width	-	-	-	-	-	-	-	90 m	120 m(e)	120 m(e)
Distance from threshold	-	-	-	-	-	-	-	60 m	60 m	60 m
Length	-	-	-	-	-	-	-	900 m	900 m	900 m
Slope	-	-	-	-	-	-	-	2.5%	2.5%	2.5%
<b>APPROACH</b>										
Length of inner edge	60 m	80 m	150 m	150 m	140 m	280 m	280 m	140 m	280 m	280 m
Distance from threshold	30 m	60 m	60 m	60 m	60 m	60 m	60 m	60 m	60 m	60 m
Divergence (each side)	10%	10%	10%	10%	15%	15%	15%	15%	15%	15%
<b>First section</b>										
Length	1600 m	2500 m	3000 m	3000 m	2500 m	3000 m	3000 m	3000 m	3000 m	3000 m
Slope	5%	4%	3.33%	2.5 %	3.33%	2%	2%	2.5%	2%	2%
<b>Second section</b>										
Length	-	-	-	-	-	3600m(b)	3600m(b)	1200m(b)	3600m(b)	3600m(b)
Slope	-	-	-	-	-	2.5%	2.5%	3%	2.5%	2.5%
<b>HORIZONTAL SECTION</b>										
length	-	-	-	-	-	8400m(b)	8400m(b)	-	8400m(b)	8400m(b)
Total length	-	-	-	-	-	15000 m	15000 m	15000 m	15000 m	15000 m
<b>TRANSITIONAL</b>										
Slope	20%	20%	20%	14.3%	20%	14.3%	14.3%	14.3%	14.3%	14.3%
<b>INNER TRANSITIONAL</b>										
Slope	-	-	-	-	-	-	-	40%	33.3%	33.3%
<b>BALKED LANDING SURFACE</b>										
Length of inner edge	-	-	-	-	-	-	-	90 m	120 m(e)	120 m(e)
Distance from threshold	-	-	-	-	-	-	-	C	1800(d)	1800(d)
Divergence (each side)	-	-	-	-	-	-	-	10%	10%	10%
Slope	-	-	-	-	-	-	-	4%	3.33%	3.33%

- a. All dimensions are measured horizontally unless specified otherwise.  
b. Variable length (see 4.2.9 or 4.2.17).  
c. Distance to the end of strip  
d. Or end of runway whichever is less.

- e. Where the code letter is F (Table 1-1), the width is increased to 140 m except for those aerodromes that accommodate a code letter F aeroplanes equipped with digital avionics that provide steering commands to maintain an established track during the go-around manoeuvre.

**Note:** See Circulars 301, —345 and Chapter 4 of the PANS-Aerodromes, Part I (Doc 9981) for further information.

## Precision approach runways

**Note 1:** See 9.9 for information regarding siting of equipment and installations on operational areas

**Note 2:** Guidance on obstacle limitation surfaces for precision approach runways is given in the Airport Services Manual (Doc 9137), Part 6.

**4.2.13** The following obstacle limitation surfaces shall be established for a precision approach runway category I:

- Conical surface;
- Inner horizontal surface;
- Approach surface; and
- Transitional surfaces.

**4.2.14** The following obstacle limitation surfaces shall be established for a precision approach runway category I:

- Inner approach surface;
- Inner transitional surfaces; and
- Balked landing surface.

**4.2.15** The following obstacle limitation surfaces shall be established for a precision approach runway category II or III:

- Conical surface;
- Inner horizontal surface;
- Approach surface and inner approach surface;
- Transitional surfaces;
- Inner transitional surfaces; and
- Balked landing surface.

**4.2.16** The heights and slopes of the surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 4-1, except in the case of the horizontal section of the approach surface (see 4.2.17).

**4.2.17** The approach surface shall be horizontal beyond the point at which the 2.5 percent slope intersects:

- a) A horizontal plane 150 m above the threshold elevation; or
- b) The horizontal plane passing through the top of any object that governs the obstacle clearance limit; whichever is the higher.



- 4.2.18** Fixed objects shall not be permitted above the inner approach surface, the inner transitional surface or the balked landing surface, except for frangible objects which because of their function must be located on the strip. Mobile objects shall not be permitted above these surfaces during the use of the runway for landing.
- 4.2.19** New objects or extensions of existing objects shall not be permitted above an approach surface or a transitional surface except when, in the opinion of PACA, the new object or extension would be shielded by an existing immovable object.

**Note:** *Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.*

- 4.2.20** New objects or extensions of existing objects shall not be permitted above the Conical surface or the inner horizontal surface and outer horizontal surface except when, in the opinion of PACA, an object would be shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.
- 4.2.21** Existing objects above an approach surface, a transitional surface, the conical surface or the inner horizontal surface and outer horizontal surface shall as far as practicable be removed except when, in the opinion of PACA, an object is shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes.

**Note:** *Because of transverse or longitudinal slopes on a strip, in certain cases the inner edge or portions of the inner edge of the approach surface may be below the corresponding elevation of the strip. It is not intended that the strip be graded to conform with the inner edge of the approach surface, nor is it intended that terrain or objects which are above the approach surface beyond the end of the strip, but below the level of the strip, be removed unless it is considered they may endanger aeroplanes.*

### **Runways meant for take-off**

- 4.2.22** The following obstacle limitation surface shall be established for a runway meant for take-off:
- Take-off climb surface.
- 4.2.23** The dimensions of the surface shall be not less than the dimensions specified in table 4-2, except that a lesser length may be adopted for the take-off climb surface where such lesser length would be consistent with procedural measures adopted to govern the outward flight of aeroplanes.
- 4.2.24** The operational characteristics of aeroplanes for which the runway is intended shall be examined to see if it is desirable to reduce the slope specified in Table 4-2 when critical operating conditions are to be catered to. If the specified slope is reduced, corresponding adjustment in the length of the take-off climb surface shall be made so as to provide protection to a height of 300 m.

**Note:** The examination shall include when local conditions differ widely from sea level standard atmospheric conditions, it may be advisable for the slope specified in Table 4-2 to be reduced. The degree of this reduction depends on the divergence between local conditions and sea level standard atmospheric conditions, and on the performance characteristics and operational requirements of the aeroplanes for which the runway is intended

**4.2.25** New objects or extensions of existing objects shall not be permitted above a take-off climb surface except when, in the opinion of PACA, the new object or extension would be shielded by an existing immovable object.

**Note:** Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.

**4.2.26** If no object reaches the 2 per cent (1:50) take-off climb surface, new objects shall be limited to preserve the existing obstacle free surface or a surface down to a slope of 1.6 per cent (1:62.5).

Aerodrome Reference Code number	3 or 4	2	1
Width (length) of inner edge	180 m	80 m 150m if clearway provided	60 m 150m if clearway provided
Distance of inner edge from end of take-off run (Where clearway is provided the inner edge is at the end of clearway)	60 m	60 m	30 m
Divergence (each side)	12.5%	10%	10%
Final width (Refer to PACA where intended track includes change of heading greater than 15°)	1200 m	580 m	380 m
Length	15 000 m	2500 m	1600 m
Slope (Where there are no obstacles the take-off climb surface (code 3 or 4) is reduced to 1.6%)	2% (1:50)	4% (1:25)	5% (1:20)

Table 4-2 Dimensions of Take-off climb surface

**4.2.27** Existing objects that extend above a take-off climb surface shall as far as practicable be removed except when, in the opinion of PACA, an object is shielded by an existing immovable object, or after aeronautical study it is determined that the object would not adversely affect the safety or significantly affect the regularity of operations of aeroplanes

**Note:** Because of transverse slopes on a strip or clearway, in certain cases portions of the inner edge of the take-off climb surface may be below the corresponding elevation of the strip or clearway. It is not intended that the strip or clearway be graded to conform with the inner edge of the take-off climb surface, nor is it intended that terrain or objects which are above the take-off climb surface beyond the end of the strip or clearway, but below the level of the strip or clearway, be removed unless it is considered they may endanger aeroplanes. Similar considerations apply at the junction of a clearway and strip where differences in transverse slopes exist.

### 4.3 Objects outside the obstacle limitation surfaces

- 4.3.1** The Public Authority for Civil Aviation (PACA) shall be consulted concerning proposed construction beyond the limits of the obstacle limitation surfaces that extend above a height established by PACA, in order to permit an aeronautical study of the effect of such construction on the operation of aeroplanes.
- 4.3.2** In areas beyond the limits of the obstacle limitation surfaces, at least those objects which extend to a height of 150 m or more above ground elevation should be regarded as obstacles, unless a special aeronautical study indicates that they do not constitute a hazard to aeroplanes.

***Note:** This study may have regard to the nature of operations concerned and may distinguish between day and night operations.*

### 4.4 Other objects

- 4.4.1** Objects which do not project through the approach surface but which would nevertheless adversely affect the optimum siting or performance of visual or non-visual aids shall, as far as practicable, be removed.
- 4.4.2** Anything which may, in the opinion of PACA after aeronautical study, endanger aeroplanes on the movement area or in the air within the limits of the inner horizontal and conical surfaces shall be regarded as an obstacle and shall be removed in so far as practicable.

***Note:** In certain circumstances, objects that do not project above any of the surfaces enumerated in 4.1 may constitute a hazard to aeroplanes as, for example, where there are one or more isolated objects in the vicinity of an aerodrome.*

### 4.5 Obstacle charts and other requirements

- 4.5.1** Except as in clause (f) below, an aerodrome operator shall survey and provide to PACA an ICAO Type A (Operating Limitations) chart for publication in the AIP. This Type A chart shall meet the following criteria:
- a) Provide the data necessary to enable an aircraft operator to comply with the operating limitations of Annex 6, Part I, Chapter 5, and Part III, Section II, Chapter 3.
  - b) Objects in the take-off flight path area which project above a plane surface having a 1.2 per cent slope and having a common origin with the take-off flight path area shall be regarded as obstacles, except:
    - 1) That obstacles lying wholly below the shadow of other obstacles need not be shown.

- 
- 2) Mobile objects such as boats, trains and trucks, shall not be considered as being capable of creating a shadow.
    - 3) If the obstacle creating a shadow is likely to be removed, objects that would become obstacles by its removal shall be shown
  - c) Mobile objects such as boats, trains and trucks, which may project above the 1.2 per cent plane, shall be considered obstacles but shall not be considered as being capable of creating a shadow.
  - d) The take-off flight path area consists of a quadrilateral area on the surface of the earth lying directly below, and symmetrically disposed about, the take-off flight path:
    - 1. It commences at the end of the runway or clearway, if clearway is declared.
    - 2. Its width at the point of origin is 180 m and this width increases at the rate of 0.25D to a maximum of 1 800 m where D is the distance from the point of origin;
    - 3. It extends to the point beyond which no obstacles exist or to a distance of 10.0 km, whichever is the lesser.
  - e) For runways serving aircraft having operating limitations which do not preclude the use of a take-off flight path gradient of less than 1.2 per cent, the extent of the take-off flight path area specified shall be increased to not less than 12.0 km and the slope of the plane surface specified shall be reduced to 1.0 per cent or, when a 1.0 per cent survey plane touches no obstacles, this plane may be lowered until it touches the first obstacle, except:
  - f) Unless there are no obstacles in the take-off flight path areas, in which case a notification to this effect shall be provided to the PACA to be published in the AIP.
- 4.5.2** An aerodrome operator shall collect sets of electronic terrain and obstacle data and these sets shall be recorded in databases in accordance with the Area 2 terminal control area coverage area: Area 2 shall be the terminal control area as published in the aeronautical information publication or limited to a 45-km radius from the aerodrome/heliport reference point (whichever is smaller). At IFR aerodromes where a terminal control area has not been established, Area 2 shall be the area within a 45-km radius of the aerodrome reference point.
- 4.5.3** At IFR aerodromes/heliports, an aerodrome operator shall collect sets of electronic terrain and obstacle data and these sets shall be recorded in databases in accordance with the Area 3 to cover the area that extends from the edge(s) of the runway(s) to 90 m from the runway centre line(s) and for all other parts of aerodrome/heliport movement area(s), 50 m from the edge(s) of the defined area(s)
- 4.5.4** An aerodrome operator shall collect sets of electronic terrain and obstacle data and these sets shall be recorded in databases in accordance with the Area 4: those runways where precision approach Category II or III operations have been established and where detailed terrain information is required by operators to enable them to assess, by use of radio altimeters, the effect of terrain on decision height determination. The width of the area
-

shall be 60 m on either side of the extended runway centre line while the length shall be at least 900 m from the runway threshold measured along the extended runway centreline.

## CHAPTER 5 - VISUAL AIDS FOR NAVIGATION

### 5.1 Indicators and signalling devices

#### 5.1.1 Wind direction indicator

##### Application

5.1.1.1 An aerodrome shall be equipped with at least two wind direction indicators.

##### Location

5.1.1.2 The wind direction indicators shall be located so as to be visible from aircraft in flight or on the movement area and in such a way as to be free from the effects of air disturbances caused by nearby objects. This location shall be approved by Public Authority for Civil Aviation.

##### Characteristics

5.1.1.3 The wind direction indicator shall be in the form of a truncated cone made of fabric and shall have a length of not less than 3.6 m and a diameter, at the larger end, of not less than 0.9 m. It shall be constructed so that it gives a clear indication of the direction of the surface wind and a general indication of the wind speed. The colour or colours shall be so selected as to make the wind direction indicator clearly visible and understandable from a height of at least 300 m, having regard to background. Where practicable, a single colour, preferably white or orange, shall be used. Where a combination of two colours is required to give adequate conspicuity against changing backgrounds, they shall preferably be orange and white, red and white, or black and white, and shall be arranged in five alternate bands, the first and last bands being the darker colour. These characteristics shall be subject to approval by PACA.

5.1.1.4 The location of at least one wind direction indicator shall be marked by a circular band 15 m in diameter and 1.2 m wide. The band shall be centred about the wind direction indicator support and shall be in a colour chosen to give adequate conspicuity, preferably white.

5.1.1.5 Provision shall be made for illuminating at least one wind indicator internally at an aerodrome intended for use at night.

#### 5.1.2 Landing direction indicator

##### Location

5.1.2.1 Where provided, a landing direction indicator shall be located in a conspicuous place on the aerodrome.

## Characteristics

5.1.2.2 The landing direction indicator shall be in the form of a “T”.

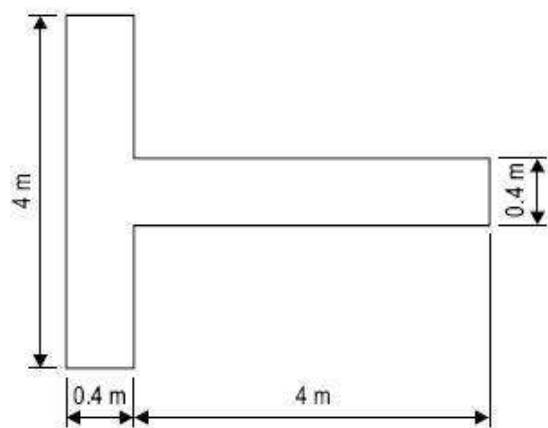


Figure 5-1. Landing direction indicator

5.1.2.3 The shape and minimum dimensions of a landing “T” shall be as shown in Figure 5-1. The colour of the landing “T” shall be either white or orange, the choice being dependent on the colour that contrasts best with the background against which the indicator will be viewed. Where required for use at night the landing “T” shall either be illuminated or outlined by white lights.

## 5.1.3 Signalling lamp

### Application

5.1.3.1 A signalling lamp shall be provided at a controlled aerodrome in the aerodrome control tower.

### Characteristics

5.1.3.2 A signalling lamp shall be capable of producing red, green and white signals, and of:

- a) being aimed manually at any target as required;
- b) Giving a signal in any one colour followed by a signal in either of the two other colours; and
- c) Transmitting a message in any one of the three colours by Morse Code up to a speed of at least four words per minute.

When selecting the green light, use shall be made of the restricted boundary of green as specified in Appendix 1, 2.1.2.

- 5.1.3.3 The beam spread shall be not less than 1° nor greater than 3°, with negligible light beyond 3°. When the signalling lamp is intended for use in the daytime the intensity of the coloured light shall be not less than 6 000 cd

#### 5.1.4 Signal panels and signal area

**Note:** *The inclusion of detailed specifications for a signal area in this section is not intended to imply that one has to be provided. Attachment A, Section 17, provides guidance on the need to provide ground signals. Implementing Standard 26, Appendix 1, specifies the shape, colour and use of visual ground signals. The Aerodrome Design Manual (Doc 9157), Part 4, provides guidance on their design.*

##### Location of signal area

- 5.1.4.1 The signal area shall be located so as to be visible for all angles of azimuth above an angle of 10° above the horizontal when viewed from a height of 300 m.

##### Characteristics of signal area

- 5.1.4.2 The signal area shall be an even horizontal surface at least 9 m square.
- 5.1.4.3 The colour of the signal area shall be chosen to contrast with the colours of the signal panels used, and it shall be surrounded by a white border not less than 0.3 m wide.

## 5.2 Markings

### 5.2.1 General

#### Interruption of runway markings

- 5.2.1.1 At an intersection of two (or more) runways the markings of the more important runway, except for the runway side stripe marking, shall be displayed and the markings of the other runway(s) shall be interrupted. The runway side stripe marking of the more important runway may be either continued across the intersection or interrupted.
- 5.2.1.2 The order of importance of runways for the display of runway markings shall be as follows:
- 1st — Precision approach runway;
  - 2nd — Non-precision approach runway; and
  - 3rd — Non-instrument runway.



- 5.2.1.3 At an intersection of a runway and taxiway the markings of the runway shall be displayed and the markings of the taxiway interrupted, except that runway side stripe markings may be interrupted.

**Note:** See 5.2.8.7 regarding the manner of connecting runway and taxiway centre line markings

### **Colour and conspicuity**

- 5.2.1.4 Runway markings shall be white.

**Note 1:** It has been found that, on runway surfaces of light colour, the conspicuity of white markings can be improved by outlining them in black.

**Note 2:** It is preferable that the risk of uneven friction characteristics on markings be reduced in so far as practicable by the use of a suitable kind of paint.

**Note 3:** Markings may consist of solid areas or a series of longitudinal stripes providing an effect equivalent to the solid areas.

- 5.2.1.5 Taxiway markings, runway turn pad markings and aircraft stand markings shall be yellow.

- 5.2.1.6 Apron safety lines shall be of a conspicuous colour which shall contrast with that used for aircraft stand markings for apron safety lines, normally white, outlined in black or red.

- 5.2.1.7 At aerodromes where operations take place at night, pavement markings shall be made with reflective materials designed to enhance the visibility of the markings.

- 5.2.1.8 All airside road markings shall not be painted in yellow.

- 5.2.1.9 All Curbstones located airside shall be painted red and white.

**Note:** Guidance on reflective materials is given in the Aerodrome Design Manual (Doc 9157), Part 4.

### **Unpaved taxiways**

- 5.2.1.10 An unpaved taxiway shall be provided, so far as practicable, with the markings prescribed for paved taxiways.

## **5.2.2 Runway designation marking**

### **Application**

- 5.2.2.1 A runway designation marking shall be provided at the thresholds of a paved runway.

- 5.2.2.2 A runway designation marking shall be provided, so far as practicable, at the thresholds of an unpaved runway.


## Location

5.2.2.3 A runway designation marking shall be located at a threshold as shown in Figure 5-2 as appropriate.

**Note:** If the runway threshold is displaced from the extremity of the runway, a sign showing the designation of the runway may be provided for aeroplanes taking off.

## Characteristics

5.2.2.4 A runway designation marking shall consist of a two-digit number and on parallel runways shall be supplemented with a letter. On a single runway, dual parallel runways and triple parallel runways the two-digit number shall be the whole number nearest the one-tenth of the magnetic North when viewed from the direction of approach. On four or more parallel runways, one set of adjacent runways shall be numbered to the nearest one-tenth magnetic azimuth and the other set of adjacent runways numbered to the next nearest one-tenth of the magnetic azimuth. When the above rule would give a single digit number, it shall be preceded by a zero.

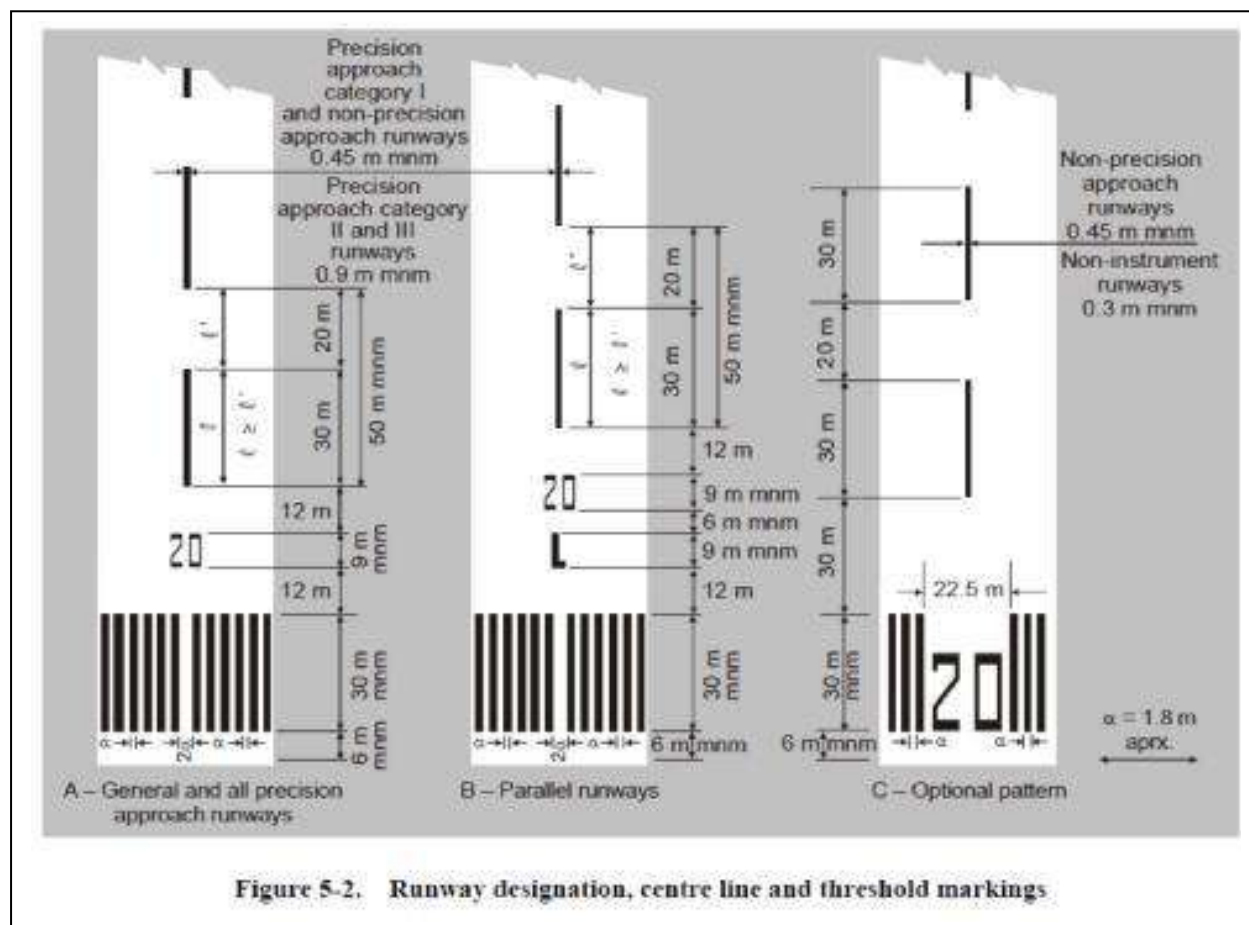

5.2.2.5 In the case of parallel runways, each runway designation number shall be supplemented by a letter as follows, in the order shown from left to right when viewed from the direction of approach:

- For two parallel runways: “L” “R”;
- For three parallel runways: “L” “C” “R”;
- For four parallel runways: “L” “R” “L” “R”;
- For five parallel runways: “L” “C” “R” “L” “R” or “L” “R” “L” “C” “R”; and
- For six parallel runways: “L” “C” “R” “L” “C” “R”.

5.2.2.6 The numbers and letters shall be in the form and proportion shown in Figure 5-3. The dimensions shall be not less than those shown in Figure 5-3, but where the numbers are incorporated in the threshold marking, larger dimensions shall be used in order to fill adequately the gap between the stripes of the threshold marking.

### 5.2.3 Runway centre line marking

#### Application

5.2.3.1 A runway centre line marking shall be provided on a paved runway.

#### Location

5.2.3.2 A runway centre line marking shall be located along the centre line of the runway between the runway designation markings as shown in Figure 5-2, except when interrupted in compliance with 5.2.1.1.

#### Characteristics

5.2.3.3 A runway centre line marking shall consist of a line of uniformly spaced stripes and gaps. The length of a stripe plus a gap shall be not less than 50 m or more than 75 m. The length of each stripe shall be at least equal to the length of the gap or 30 m, whichever is greater.

5.2.3.4 The width of the stripes shall be not less than:

- 0.90 m on precision approach category II and III runways;
- 0.45 m on non-precision approach runways where the code number is 3 or 4, and precision approach category I runways; and
- 0.30 m on non-precision approach runways where the code number is 1 or 2, and on non-instrument runways.

## 5.2.4 Threshold marking

### Application

- 5.2.4.1 A threshold marking shall be provided at the threshold of a paved instrument runway, and of a paved non-instrument runway where the code number is 3 or 4 and the runway is intended for use by international commercial air transport.
- 5.2.4.2 A threshold marking shall be provided at the threshold of a paved non-instrument runway where the code number is 3 or 4 and the runway is intended for use by other than international commercial air transport.
- 5.2.4.3 A threshold marking shall be provided, so far as practicable, at the thresholds of an unpaved runway.

**Note:** *The Aerodrome Design Manual (Doc 9157), Part 4, shows a form of marking which has been found satisfactory for the marking of downward slopes immediately before the threshold.*

### Location

- 5.2.4.4 The stripes of the threshold marking shall commence 6 m from the threshold.

### Characteristics

- 5.2.4.5 A runway threshold marking shall consist of a pattern of longitudinal stripes of uniform dimensions disposed symmetrically about the centre line of a runway as shown in Figure 5-2 (A) and (B) for a runway width of 45 m. The number of stripes shall be in accordance with the runway width as follows:

<i>Runway width</i>	<i>Number of stripes</i>
18 m	4
23 m	6
30 m	8
45 m	12
60 m	16

Except that on non-precision approach and non-instrument runways 45 m or greater in width, they may be as shown in Figure 5-2 (C), subject to approval of PACA.

- 5.2.4.6 The stripes shall extend laterally to within 3 m of the edge of a runway or to a distance of 27 m on either side of a runway centre line, whichever results in the smaller lateral distance. Where a runway designation marking is placed within a threshold marking there shall be a minimum of three stripes on each side of the centre line of the runway. Where a runway designation marking is placed above a threshold marking, the stripes shall be continued across the runway. The stripes shall be at least 30 m long and approximately

1.80 m wide with spacings of approximately 1.80 m between them except that, where the stripes are continued across a runway, a double spacing shall be used to separate the two stripes nearest the centre line of the runway, and in the case where the designation marking is included within the threshold marking this spacing shall be 22.5 m

**Figure 5-3**

**Form and proportions of numbers and letters for runway designation markings**

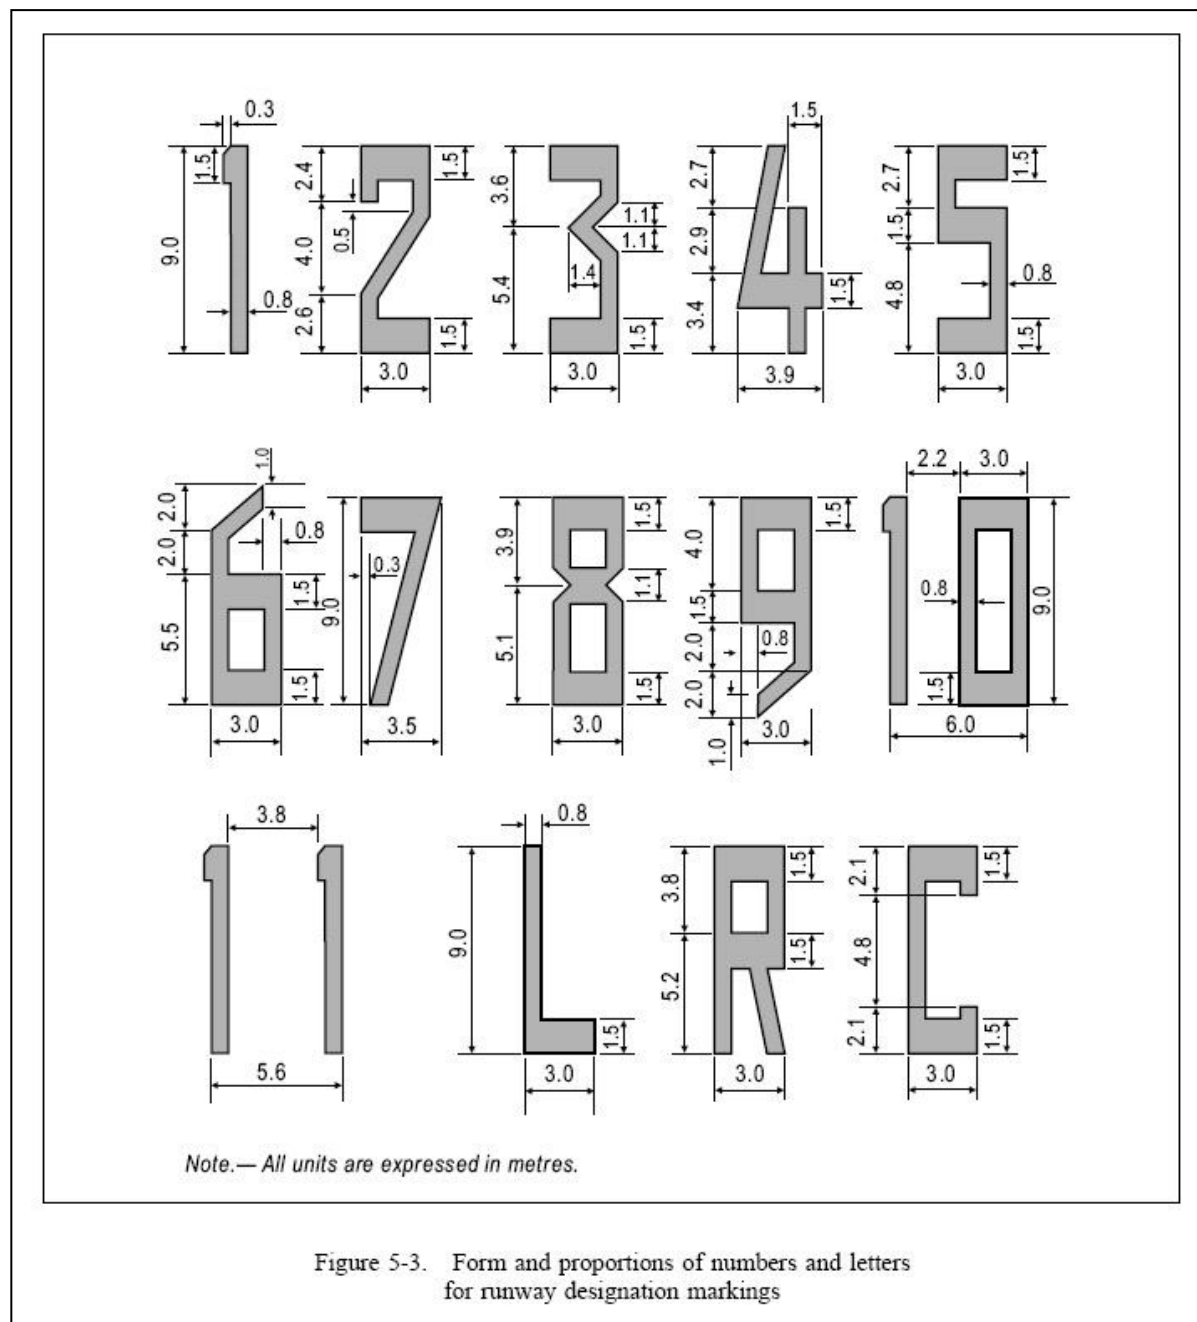


Figure 5-3. Form and proportions of numbers and letters for runway designation markings

## Transverse stripe

5.2.4.7 Where a threshold is displaced from the extremity of a runway or where the extremity of a runway is not square with the runway centre line, a transverse stripe as shown in Figure 5-4 (B) shall be added to the threshold marking.

5.2.4.8 A transverse stripe shall be not less than 1.80 m wide.


## Arrows

5.2.4.9 Where a runway threshold is permanently displaced, arrows conforming to Figure 5-4 (B) shall be provided on the portion of the runway before the displaced threshold.

5.2.4.10 When a runway threshold is temporarily displaced from the normal position, it shall be marked as shown in Figure 5-4 (A) or 5-4 (B) and all markings prior to the displaced threshold shall be obscured except the runway centre line marking, which shall be converted to arrows.

**Note 1:** In the case where a threshold is temporarily displaced for only a short period of time, it has been found satisfactory to use markers in the form and colour of a displaced threshold marking rather than attempting to paint this marking on the runway.

**Note 2:** When the runway before a displaced threshold is unfit for the surface movement of aircraft, closed markings, as described in 7.1.4, are required to be provided.

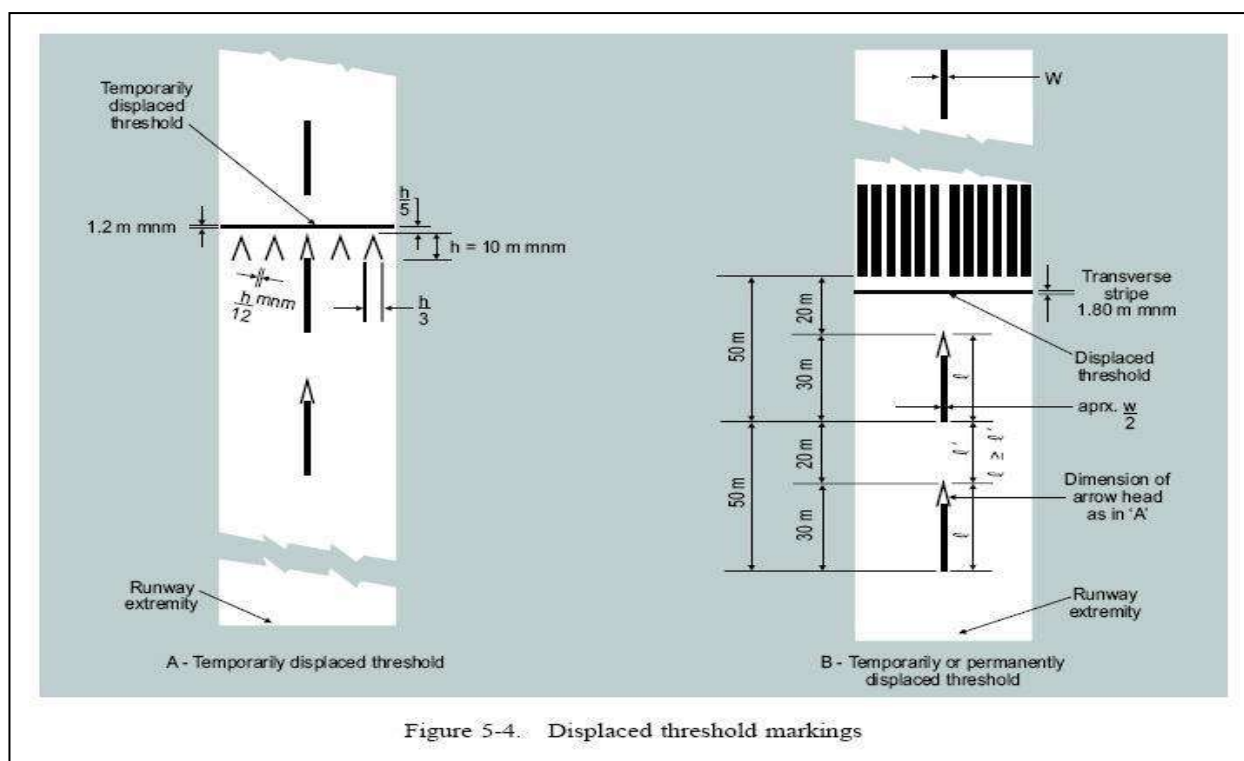

## **5.2.5 Aiming point marking**

### **Application**

5.2.5.1 An aiming point marking shall be provided at each approach end of a paved instrument runway where the code number is 2, 3 or 4.

5.2.5.2 An aiming point marking shall be provided at each approach end of:

- a) A paved non-instrument runway where the code number is 3 or 4;
- b) A paved instrument runway where the code number is 1;

When additional conspicuity of the aiming point is desirable

### **Location**

5.2.5.3 The aiming point marking shall commence no closer to the threshold than the distance indicated in the appropriate column of Table 5-1, except that, on a runway equipped with a visual approach slope indicator system, the beginning of the marking shall be coincident with the visual approach slope origin.

5.2.5.4 An aiming point marking shall consist of two conspicuous stripes. The dimensions of the stripes and the lateral spacing between their inner sides shall be in accordance with the provisions of the appropriate column of Table 5-1. Where a touchdown zone marking is provided, the lateral spacing between the markings shall be the same as that of the touchdown zone marking.

**Table 5-1** Location and dimensions of aiming point marking, subject to PAPI slope origin

Location and dimensions	Landing Distance available				
	and less than 800m	800 m up to but not including 1 200 m	1 200 m up to but not including 2 400 m	2 400 m and above, codes A, B, C, D	2 400 m and above, codes E, F
	(2)	(3)	(4)	(5)	(6)
Distance from threshold to beginning of marking stripe, if no PAPIs. Where PAPIs are provided, aiming point marking commences at origin of PAPI slope.	150 m	250 m	300 m	400 m	At origin of PAPI slope
Length of stripe	30-45m	30-45m	45-60m	45-60m	50m
Width of stripe	4m	6m	6-10m	6-10m	10m

**Notes:**

- The greater dimensions of the specified ranges are intended to be used where increased conspicuity is required.*
- The lateral spacing may be varied within these limits to minimize the contamination of the marking by rubber deposits.*
- These figures were deduced by reference to the outer main gear wheel span which is element 2 of the aerodrome reference code.*

**5.2.6 Touchdown zone marking****Application**

5.2.6.1 A touchdown zone marking shall be provided in the touchdown zone of a paved precision approach runway where the code number is 2, 3 or 4.

5.2.6.2 A touchdown zone marking shall be provided in the touchdown zone of a paved non-precision approach or non-instrument runway where the code number is 3 or 4 and additional conspicuity of the touchdown zone is desirable.

**Location and characteristics**

5.2.6.3 A touchdown zone marking shall consist of pairs of rectangular markings symmetrically disposed about the runway centre line with the number of such pairs related to the landing distance available and, where the marking is to be displayed at both the approach directions of a runway, the distance between the thresholds, as follows:



<i>Landing distance available or the distance between thresholds</i>	<i>Pair(s) of markings</i>
less than 900 m	1
900 m up to but not including 1 200 m	2
1200 m up to but not including 1 500 m	3
1500 m up to but not including 2 400 m	4
2400 m or more (codes A, B, C, D)	6
2400 m or more (codes E, F)	6

5.2.6.4 A touchdown zone marking shall conform to either of the two patterns shown in Figure 5-5. For the pattern shown in Figure 5-5 (A), the markings shall be not less than 22.5 m long and 3 m wide. For the pattern shown in Figure 5-5 (B), each stripe of each marking shall be not less than 22.5 m long and 1.8 m wide with a spacing of 1.5 m between adjacent stripes. The lateral spacing between the inner sides of the rectangles shall be equal to that of the aiming point marking where provided. Where an aiming point marking is not provided, the lateral spacing between the inner sides of the rectangles shall correspond to the lateral spacing specified for the aiming point marking in Table 5-1 (columns 2, 3, 4 or 5, as appropriate). The pairs of markings shall be provided at longitudinal spacings of 150 m beginning from the threshold, except that pairs of touchdown zone markings coincident with or located within 50 m of an aiming point marking shall be deleted from the pattern.

5.2.6.5 On a non-precision approach runway where the code number is 2, an additional pair of touchdown zone marking stripes shall be provided 150 m beyond the beginning of the aiming point marking.

## 5.2.7 Runway side stripe marking

### Application

5.2.7.1 A runway side stripe marking shall be provided between the thresholds of a paved runway where there is a lack of contrast between the runway edges and the shoulders or the surrounding terrain.

5.2.7.2 A runway side stripe marking shall be provided on a precision approach runway irrespective of the contrast between the runway edges and the shoulders or the surrounding terrain.


### Location

5.2.7.3 A runway side stripe marking shall consist of two stripes, one placed along each edge of the runway with the outer edge of each stripe approximately on the edge of the runway, except that, where the runway is greater than 60 m in width, the stripes shall be located 30 m from the runway centre line.

5.2.7.4 Where a runway turn pad is provided, the runway side stripe marking shall be continued between the runway and the runway turn pad.

### Characteristics

5.2.7.5 A runway side stripe shall have an overall width of at least 0.9 m on runways 30 m or more in width and at least 0.45 m on narrower runways.

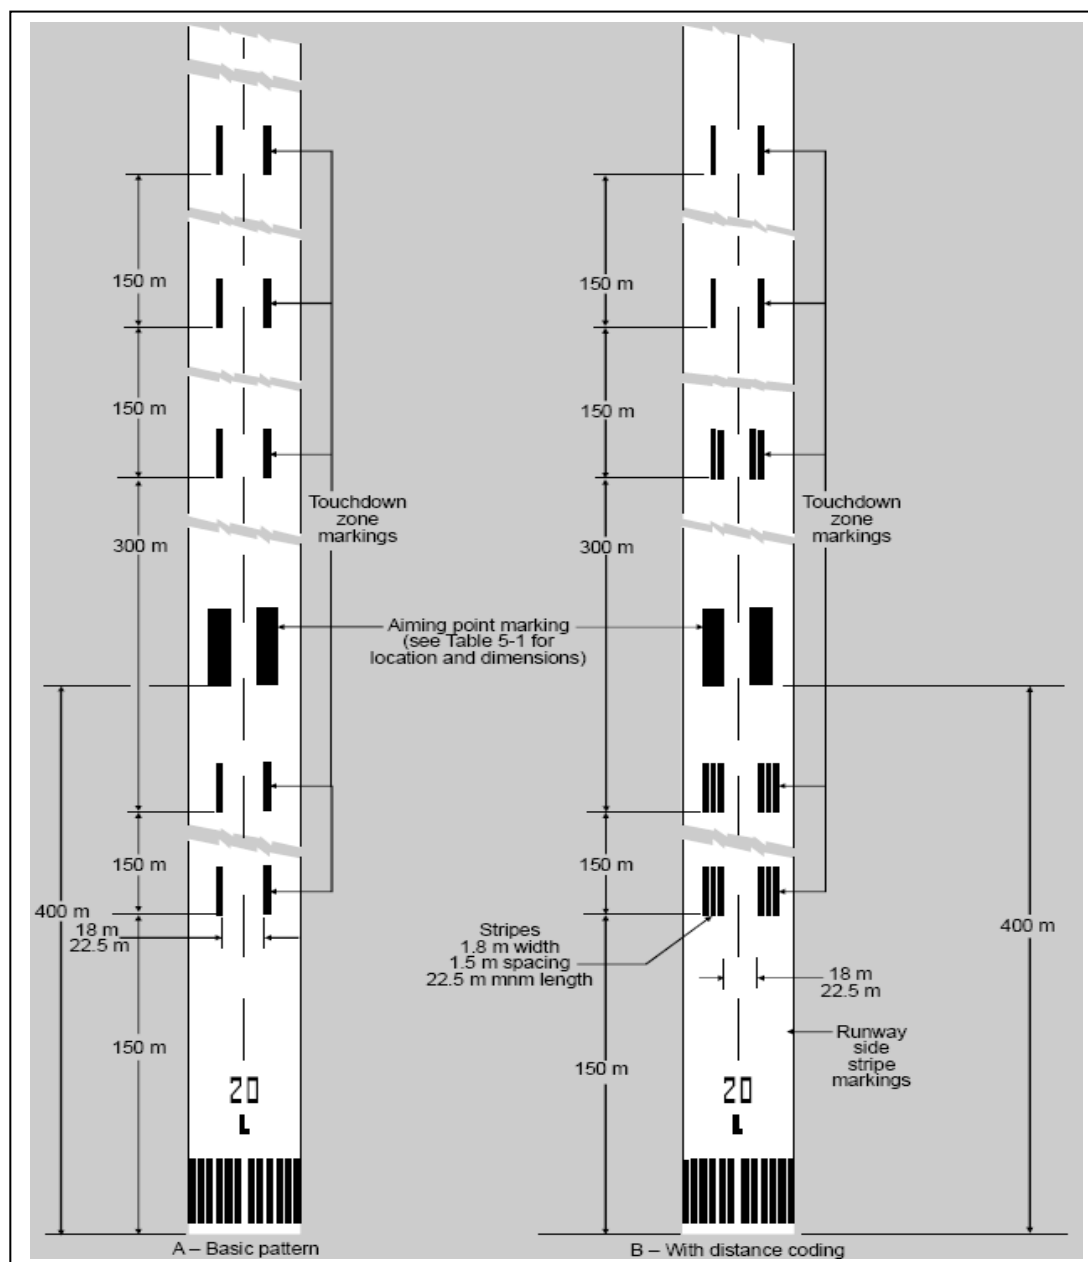

**Figure 5-5 Aiming point and touchdown zone markings  
(Illustrated for a runway with a length of 2400m or more)**

## 5.2.8 Taxiway centre line marking

### Application

5.2.8.1 Taxiway centre line marking shall be provided on a paved taxiway and apron where the code number is 3 or 4 in such a way as to provide continuous guidance between the runway centre line and aircraft stands.

5.2.8.2 Taxiway centre line marking shall be provided on a paved taxiway and apron where the code number is 1 or 2 in such a way as to provide continuous guidance between the runway centre line and aircraft stands.

5.2.8.3 Taxiway centre line marking shall be provided on a paved runway when the runway is part of a standard taxi-route and:

- a) There is no runway centre line marking; or
- b) Where the taxiway centre line is not coincident with the runway centre line.

5.2.8.4 Where it is necessary to denote the proximity of a runway-holding position, enhanced taxiway centre line marking shall be provided.

**Note:** *The provision of enhanced taxiway centre line marking may form part of runway incursion prevention measures.*

5.2.8.5 Where provided, enhanced taxiway centre line marking shall be installed at all taxiway/runway intersections at that aerodrome.

### Location

5.2.8.6 On a straight section of a taxiway the taxiway centre line marking shall be located along the taxiway centre line. On a taxiway curve the marking shall continue from the straight portion of the taxiway at a constant distance from the outside edge of the curve.

**Note:** *See 3.9.7 and Figure 3-2.*

5.2.8.7 At an intersection of a taxiway with a runway where the taxiway serves as an exit from the runway, the taxiway centre line marking shall be curved into the runway centre line marking as shown in Figures 5-6 and 5-26. The taxiway centre line marking shall be extended parallel to the runway centre line marking for a distance of at least 60 m beyond the point of tangency where the code number is 3 or 4, and for a distance of at least 30 m where the code number is 1 or 2.

5.2.8.8 Where taxiway centre line marking is provided on a runway in accordance with the marking shall be located on the centre line of the designated taxiway.

**5.2.8.9 Where provided:**

- a) An enhanced taxiway centre line marking shall extend from the runway-holding position pattern A (as defined in Figure 5-6, Taxiway markings) to a distance of up to 47 m in the direction of travel away from the runway. See figure 5-7 (a).
- b) If the enhanced taxiway centre line marking intersects another runway-holding position marking, such as for a precision approach category II or III runway, which is located within 47 m of the first runway-holding position marking, the enhanced taxiway centre line marking shall be interrupted 0.9 m prior to and after the intersected runway-holding position marking. The enhanced taxiway centre line marking shall continue beyond the intersected runway-holding position marking for at least three dashed line segments or 47 m from start to finish, whichever is greater. See Figure 5-7 (b).
- c) If the enhanced taxiway centre line marking continues through a taxiway/taxiway intersection that is located within 47 m of the runway-holding position marking, the enhanced taxiway centre line marking shall be interrupted 1.5 m prior to and after the point where the intersected taxiway centre line crosses the enhanced taxiway centre line. The enhanced taxiway centre line marking shall continue beyond the taxiway/taxiway intersection for at least three dashed line segments or 47 m from start to finish, whichever is greater. See Figure 5-7 (c).
- d) Where two taxiway centre lines converge at or before the runway-holding position marking, the inner dashed line shall not be less than 3 m in length. See Figure 5-7(d).
- e) Where there are two opposing runway-holding position markings and the distance between the markings is less than 94 m, the enhanced taxiway centre line markings shall extend over this entire distance. The enhanced taxiway centre line markings shall not extend beyond either runway-holding position marking. See Figure 5-7 (e).

**Characteristics**

5.2.8.10 A taxiway centre line marking shall be at least 15 cm in width and continuous in length except where it intersects with a runway-holding position marking or an intermediate holding-position marking as shown in Figure 5-6.

5.2.8.11 Enhanced taxiway centre line marking shall be as shown in Figure 5-7.


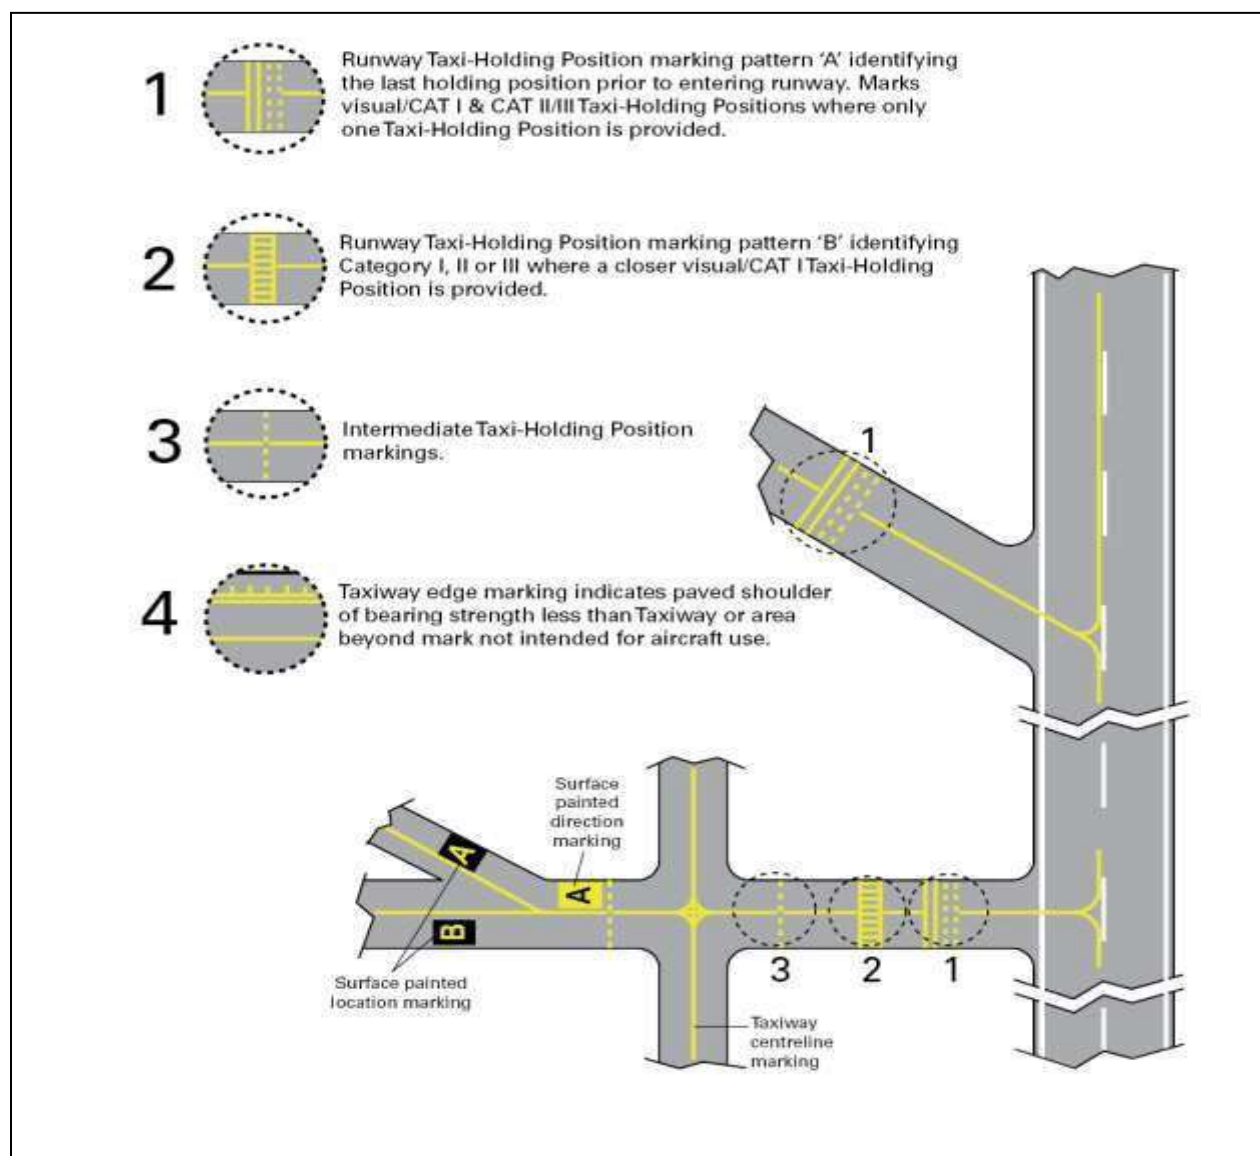


Figure 5-6 Taxiway markings

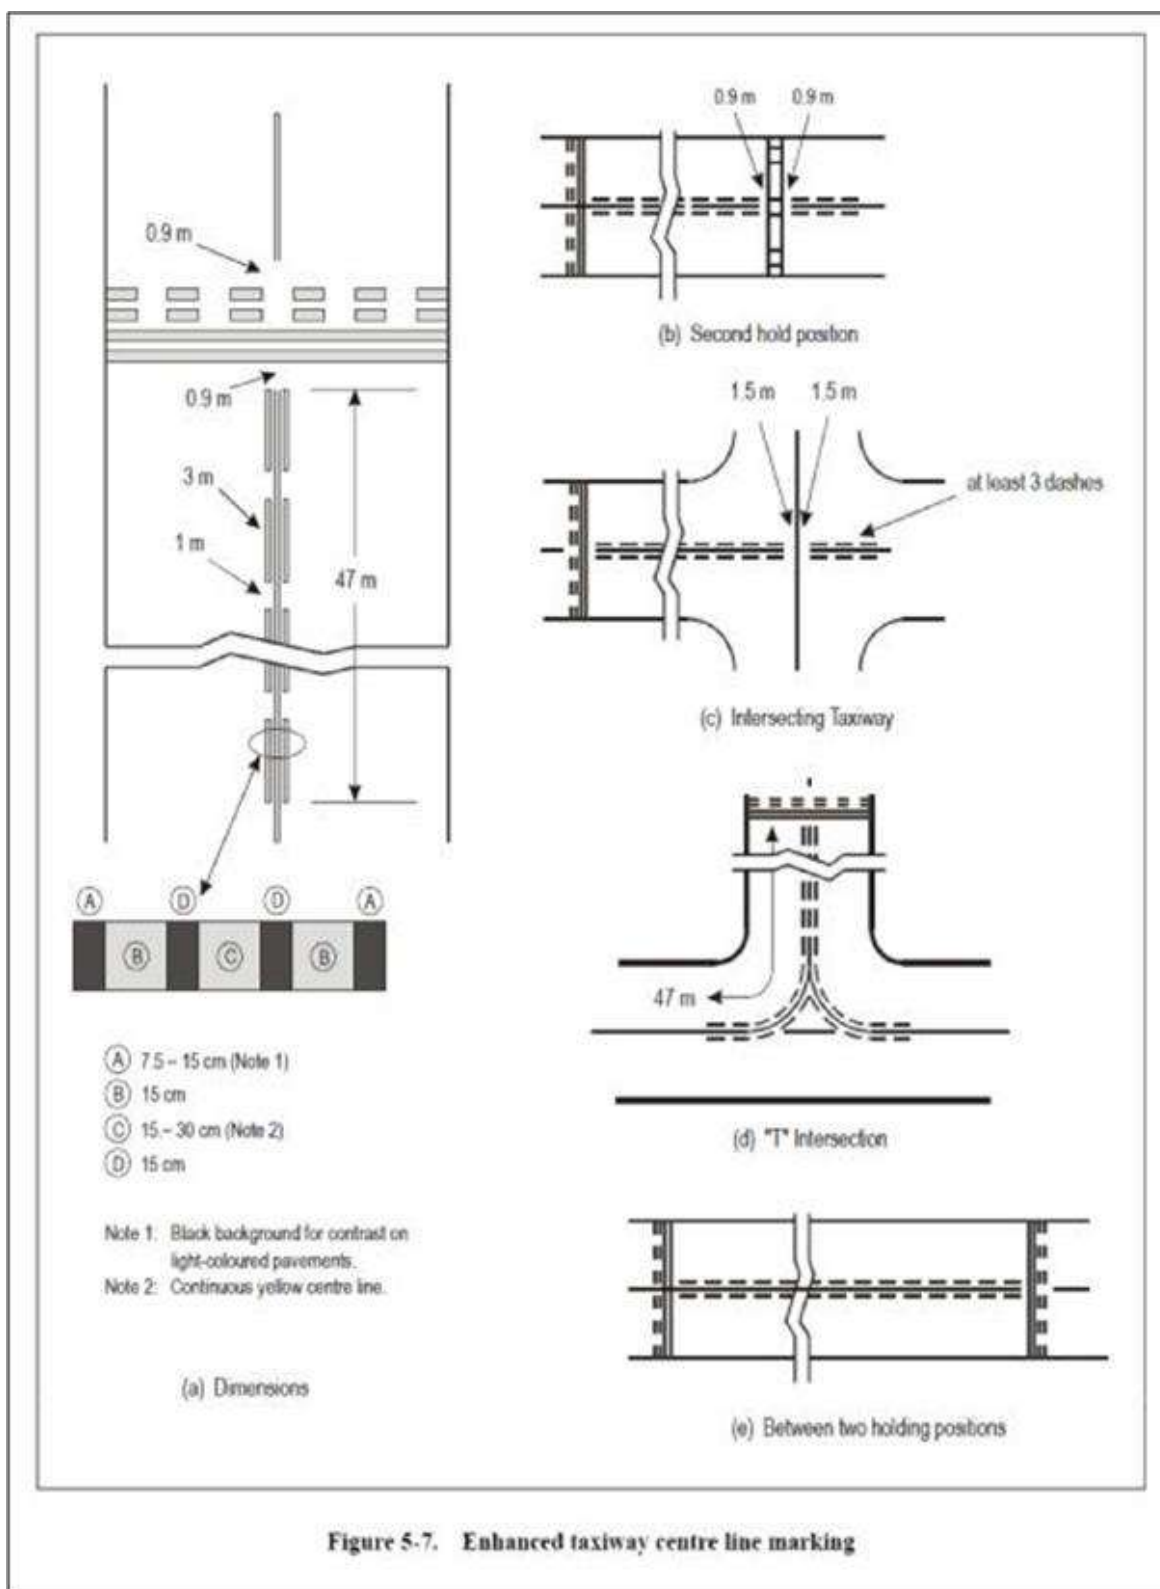

**Figure 5-7. Enhanced Taxiway CentreLine Marking**

## 5.2.9 Runway turn pad marking

### Application

5.2.9.1 Where a runway turn pad is provided, a runway turn pad marking shall be provided for continuous guidance to enable an aeroplane to complete a 180-degree turn and align with the runway centre line.

### Location

5.2.9.2 The runway turn pad marking shall be curved from the runway centre line into the turn pad. The radius of the curve shall be compatible with the manoeuvring capability and normal taxiing speeds of the aeroplanes for which the runway turn pad is intended. The intersection angle of the runway turn pad marking with the runway centre line shall not be greater than 30 degrees.

5.2.9.3 The runway turn pad marking shall be extended parallel to the runway centre line marking for a distance of at least 60 m beyond the point of tangency where the code number is 3 or 4, and for a distance of at least 30 m where the code number is 1 or 2.

5.2.9.4 A runway turn pad marking shall guide the aeroplane in such a way as to allow a straight portion of taxiing before the point where a 180-degree turn is to be made. The straight portion of the runway turn pad marking shall be parallel to the outer edge of the runway turn pad.

5.2.9.5 The design of the curve allowing the aeroplane to negotiate a 180-degree turn shall be based on a nose wheel steering angle not exceeding 45 degrees.

5.2.9.6 The design of the turn pad marking shall be such that, when the cockpit of the aeroplane remains over the runway turn pad marking, the clearance distance between any wheel of the aeroplane landing gear and the edge of the runway turn pad shall be not less than those specified in 3.3.6.

**Note:** For ease of manoeuvring, consideration may be given to providing a larger wheel-to-edge clearance for codes E and F aeroplanes. See 3.3.7.

### Characteristics

5.2.9.7 A runway turn pad marking shall be at least 15 cm in width and continuous in length.

## 5.2.10 Runway-holding position marking

### Application and location

5.2.10.1 A runway-holding position marking shall be displayed along a runway-holding position.

**Note:** See 5.4.2 concerning the provision of signs at runway-holding positions.

### Characteristics

5.2.10.2 At an intersection of a taxiway and a non-instrument, non-precision approach or take-off runway, the runway-holding position marking shall be as shown in Figure 5-6, pattern, pattern A

5.2.10.3 Where a single runway-holding position is provided at an intersection of a taxiway and a precision approach category I, II or III runway, the runway-holding position marking shall be as shown in Figure 5-6, pattern A. Where two or three runway-holding positions are provided at such an intersection, the runway-holding position marking closer (closest) to the runway shall be as shown in Figure 5-6, pattern A and the markings farther from the runway shall be as shown in Figure 5-6, pattern B.

5.2.10.4 The runway-holding position marking displayed at a runway-holding position established in accordance with 3.12.3 shall be as shown in Figure 5-6, pattern A.

5.2.10.5 Until 26 November 2026, the dimensions of runway-holding position markings shall be as shown in figure 5-8, pattern A1 (or A2) or pattern B1 (or B2), as appropriate.

5.2.10.6 As of 26 November 2026, the dimensions of runway-holding position marking shall be as shown in Figure 5-8, pattern A2 or pattern B2, as appropriate.


5.2.10.7 Where increased conspicuity of the runway-holding position is required, the dimensions of runway-holding position marking shall be as shown in Figure 5-8, pattern A2 or pattern B2, as appropriate.

**Note:** *An increased conspicuity of the runway-holding position can be required, notably to avoid incursion risks.*

5.2.10.8 Where a pattern B runway-holding position marking is located on an area where it would exceed 60 m in length, the term “CAT II” or “CAT III” as appropriate shall be marked on the surface at the ends of the runway-holding position marking and at equal intervals of 45 m maximum between successive marks. The letters shall be not less than 1.8 m high and shall be placed not more than 0.9 m beyond the holding position marking.

5.2.10.9 The runway-holding position marking displayed at a runway/runway intersection shall be perpendicular to the centre line of the runway forming part of the standard taxi-route. The pattern of the marking shall be as shown in Figure 5-8, pattern A2.



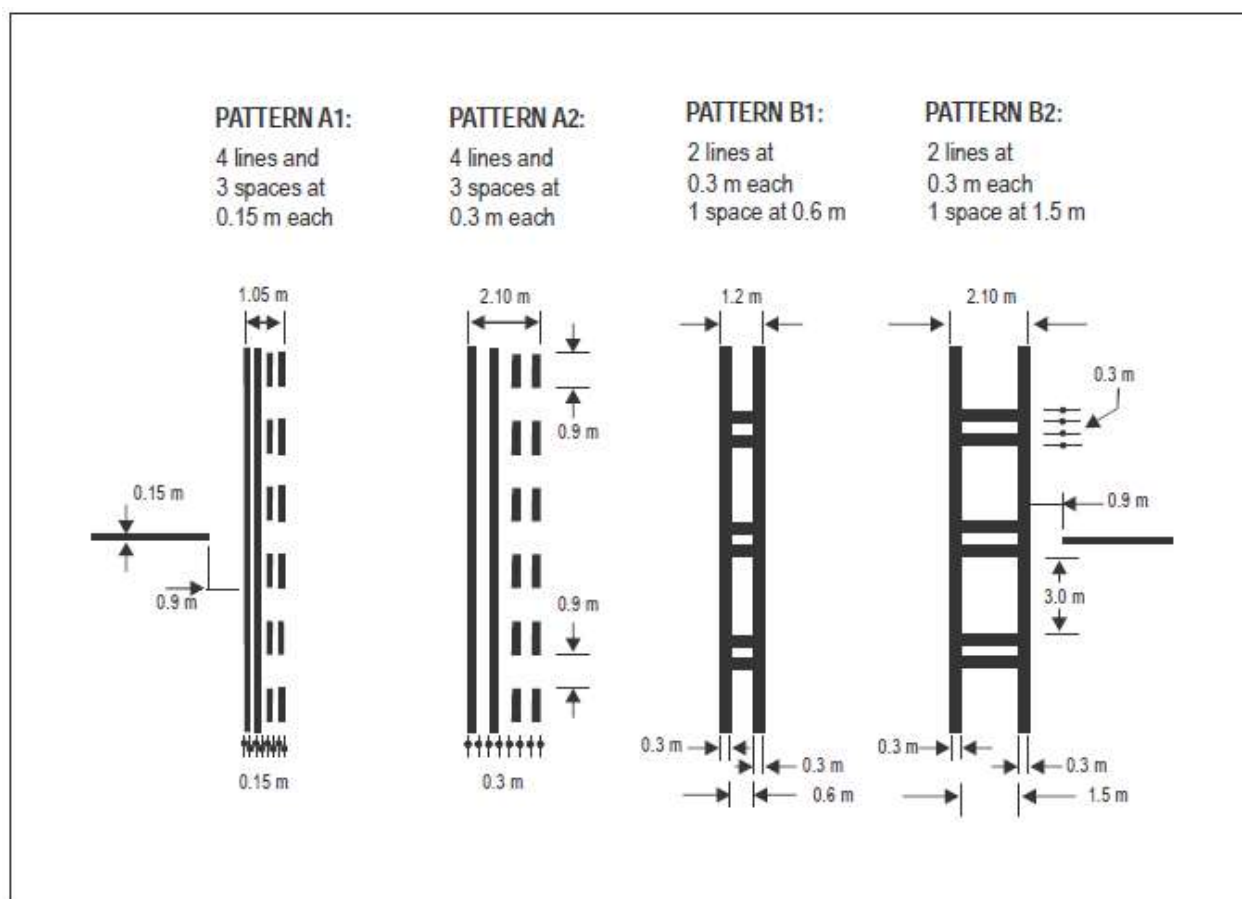

**Figure 5-8. Runway-holding position markings**  
**Note:** Patterns A1 and B1 are no longer valid after 2026.

## 5.2.11 Intermediate holding position marking

### Application and location

5.2.11.1 An intermediate holding position marking shall be displayed along an intermediate holding position.

5.2.11.2 Where an intermediate holding position marking is displayed at an intersection of two paved taxiways, it shall be located across the taxiway at sufficient distance from the near edge of the intersecting taxiway to ensure safe clearance between taxiing aircraft. It shall be coincident with a stop bar or intermediate holding position lights, where provided.

### Characteristics

5.2.11.3 An intermediate holding position marking shall consist of a single broken line as shown in Figure 5-6.

## 5.2.12 VOR aerodrome checkpoint marking

### Application

5.2.12.1 When a VOR aerodrome checkpoint is established, it shall be indicated by a VOR aerodrome checkpoint marking and sign.

**Note:** See 5.4.4 for VOR aerodrome checkpoint sign.

### 5.2.12.2 Site selection

**Note:** Guidance on the selection of sites for VOR aerodrome checkpoints is given in annex 10, volume 1, attachment E.

### Location

5.2.12.3 A VOR aerodrome checkpoint marking shall be centred on the spot at which an aircraft is to be parked to receive the correct VOR signal.


### Characteristics

5.2.12.4 A VOR aerodrome checkpoint marking shall consist of a circle 6 m in diameter and have a line width of 15 cm (see Figure 5-9 (A)).

5.2.12.5 When it is preferable for an aircraft to be aligned in a specific direction, a line shall be provided that passes through the centre of the circle on the desired azimuth. The line shall extend 6 m outside the circle in the desired direction of heading and terminate in an arrowhead. The width of the line shall be 15 cm (see Figure 5-9 (B)).

5.2.12.6 A VOR aerodrome checkpoint marking shall preferably be white in colour but should differ from colours used for the taxiway markings.

**Note:** To provide contrast, markings may be bordered with black.

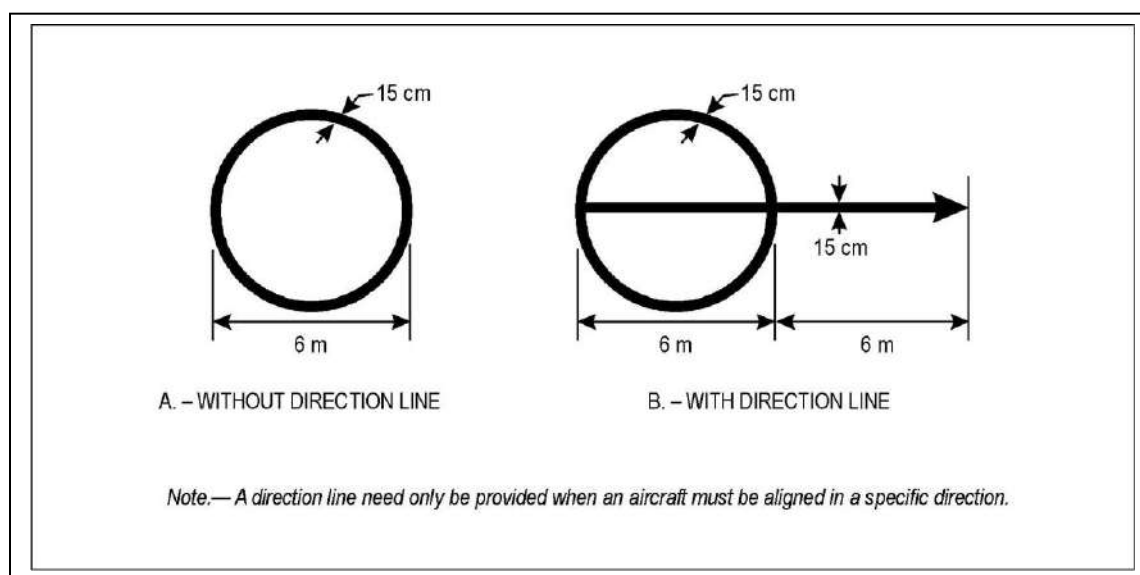

**Figure 5-9. VOR aerodrome checkpoint marking**

### 5.2.13 Aircraft stand marking

**Note:** Guidance on the layout of aircraft stand markings is contained in the *Aerodrome Design Manual (Doc 9157), Part 4*

#### Application

5.2.13.1 Aircraft stand markings shall be provided for designated parking positions on a paved apron.

#### Location

5.2.13.2 Aircraft stand markings on a paved apron shall be located so as to provide the clearances specified in 3.13.6, when the nose wheel follows the stand marking.

#### Characteristics

5.2.13.3 Aircraft stand markings shall include such elements such as stand identification, lead-in line, turn bar, turning line, alignment bar, stop line and lead-out line, as are required by the parking configuration and to complement other parking aids.

5.2.13.4 Aircraft stand identification (letter and/or number) shall be included in the lead-in line a short distance after the beginning of the lead-in line. The height of the identification shall be adequate to be readable from the cockpit of aircraft using the stand.

5.2.13.5 Where two sets of aircraft stand markings are superimposed on each other in order to permit more flexible use of the apron and it is difficult to identify which stand marking shall be followed, or safety would be impaired if the wrong marking was followed, then identification of the aircraft for which each set of markings is intended shall be added to the stand identification.

**Note:** Example: 2A-B747, 2B-F28

5.2.13.6 Lead-in, turning and lead-out lines shall normally be continuous in length and have a width of not less than 15 cm. Where one or more sets of stand markings are superimposed on a stand marking, the lines shall be continuous for the most demanding aircraft and broken for other aircraft.

5.2.13.7 The curved portions of lead-in, turning and lead-out lines shall have radii appropriate to the most demanding aircraft type for which the markings are intended.

5.2.13.8 Where it is intended that an aircraft proceed in one direction only, arrows pointing in the direction to be followed shall be added as part of the lead-in and lead-out lines.

5.2.13.9 A turn bar shall be located at right angles to the lead-in line, abeam the left pilot position at the point of initiation of any intended turn. It shall have a length and width of not less than 6 m and 15 cm, respectively, and include an arrowhead to indicate the direction of turn.

**Note:** The distances to be maintained between the turn bar and the lead-in line may vary according to different aircraft types, taking into account the pilot's field of view.

5.2.13.10 If more than one turn bar and/or stop line is required, they shall be coded.

5.2.13.11 An alignment bar shall be placed so as to be coincident with the extended centre line of the aircraft in the specified parking position and visible to the pilot during the final part of the parking manoeuvre. It shall have a width of not less than 15 cm.

5.2.13.12 A stop line shall be located at right angles to the alignment bar, abeam the left pilot position at the intended point of stop. It shall have a length and width of not less than 6 m and 15 cm, respectively.


**Note:** The distances to be maintained between the stop line and the lead-in line may vary according to different aircraft types, taking into account the pilot's field of view.

## 5.2.14 Apron safety lines

**Note:** Guidance on apron safety lines is contained in the Aerodrome Design Manual (Doc 9157), Part 4.

### Application

5.2.14.1 Apron safety lines shall be provided on a paved apron as required by the parking configurations and ground facilities (as per illustration below).

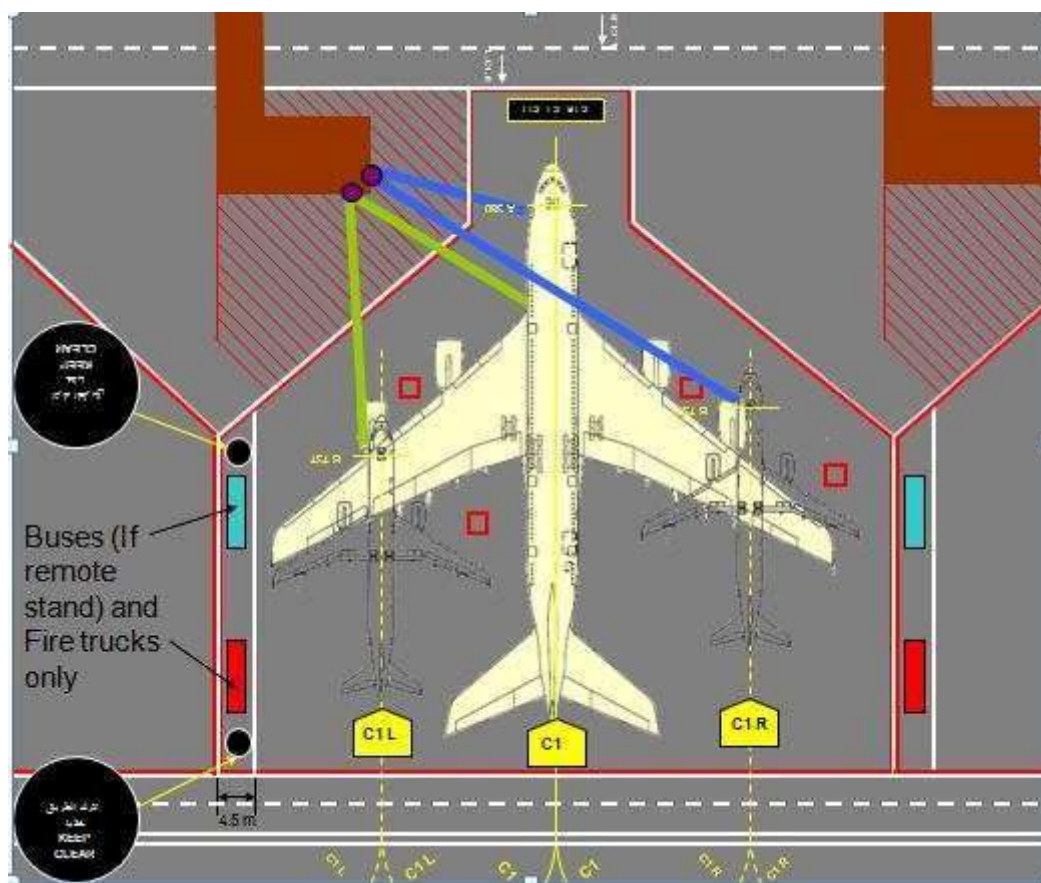

### Stand & Safety Line Marking

#### Location

5.2.14.2 Apron safety lines shall be located so as to define the areas intended for use by ground vehicles and other aircraft servicing equipment, etc., to provide safe separation from aircraft.

#### Characteristics

5.2.14.3 Apron safety lines shall include such elements as wing tip clearance lines and service road boundary lines as required by the parking configurations and ground facilities.

5.2.14.4 An apron safety line shall be continuous in length and at least 10 cm in width.

### 5.2.15 Road-holding position marking

#### Application

5.2.15.1 A road-holding position marking shall be provided at all road entrances to a runway.

#### Location

5.2.15.2 The road-holding position marking shall be located across the road at the holding position.

#### Characteristics

5.2.15.3 The road-holding position marking shall be in accordance with the local road traffic regulations, except that yellow shall not be used for any road markings on the airside.

### 5.2.16 Mandatory instruction marking

**Note:** Guidance on mandatory instruction marking is given in the *Aerodrome Design Manual (Doc 9157)*, Part 4.

#### Application

5.2.16.1 Where it is impracticable to install a mandatory instruction sign in accordance with 5.4, a mandatory instruction marking shall be provided on the surface of the pavement.

5.2.16.2 Where operationally required, such as on taxiways exceeding 60 m in width, or to assist in the prevention of a runway incursion, a mandatory instruction sign shall be supplemented by a mandatory instruction marking.

#### Location

5.2.16.3 The mandatory instruction marking on taxiways where the code letter is A, B, C or D shall be located across the taxiway equally placed about the taxiway centre line and on the holding side of the runway-holding position marking as shown in Figure 5-10 (A). The distance between the nearest edge of the marking and the runway-holding position marking or the taxiway centre line marking shall be not less than 1 m.

5.2.16.4 The mandatory instruction marking on taxiways where the code letter is E or F shall be located on both sides of the taxiway centre line marking and on the holding side of the runway-holding position marking as shown in Figure 5-10 (B). The distance between the nearest edge of the marking and the runway-holding position marking or the taxiway centre line marking shall be not less than 1 m.

5.2.16.5 Except where operationally required and with the approval of PACA, a mandatory instruction marking should not be located on a runway.

## Characteristics


5.2.16.6 A mandatory instruction marking shall consist of an inscription in white on a red background. Except for a NO ENTRY marking, the inscription shall provide information identical to that of the associated mandatory instruction sign.

5.2.16.7 A NO ENTRY marking shall consist of an inscription in white reading NO ENTRY on a red background.

5.2.16.8 Where there is insufficient contrast between the marking and the pavement surface, the mandatory instruction marking shall include an appropriate border, preferably white or black.

5.2.16.9 The character height shall be 4 m for inscriptions where the code letter is C, D, E or F, and 2 m where the code letter is A or B. The inscriptions shall be in the form and proportions shown in Appendix 3.

5.2.16.10 The background shall be rectangular and extend a minimum of 0.5 m laterally and vertically beyond the extremities of the inscription.

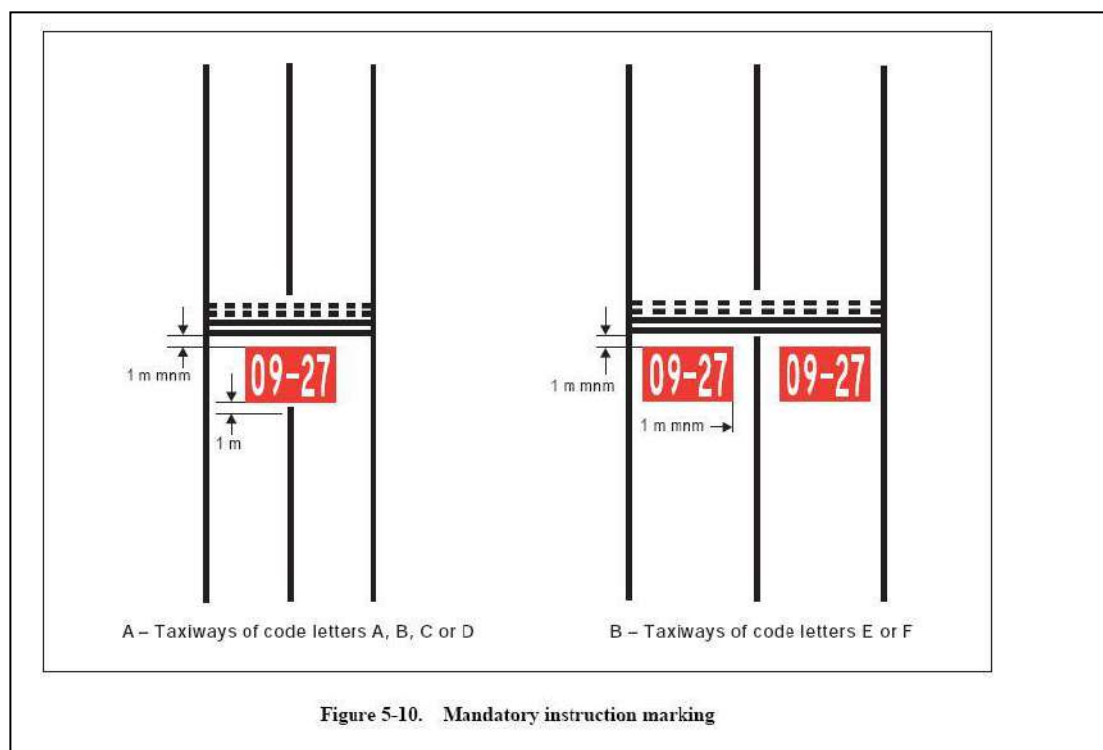

### 5.2.17 Information marking

**Note:** Guidance on information marking is contained in the Aerodrome Design Manual (Doc 9157), Part 4.

#### Application

5.2.17.1 Where an information sign would normally be installed and is agreed with PACA impractical to install, as determined by the Aerodrome Operator, an information marking shall be displayed on the surface of the pavement.

5.2.17.2 Where operationally required an information sign shall be supplemented by an information marking.

5.2.17.3 An information (location/direction) marking shall be displayed prior to and following complex taxiway intersections and where operational experience has indicated the addition of a taxiway location marking could assist flight crew ground navigation.

5.2.17.4 An information (location) marking shall be displayed on the pavement surface at regular intervals along taxiways of great length.

#### Location

5.2.17.5 The information marking shall be displayed across the surface of the taxiway or apron where necessary and positioned so as to be legible from the cockpit of an approaching aircraft.

#### Characteristics

5.2.17.6 An information marking shall consist of:

- a) An inscription in yellow upon a black background, when it replaces or supplements a location sign; and
- b) An inscription in black upon a yellow background, when it replaces or supplements a direction or destination sign.

5.2.17.7 Where there is insufficient contrast between the marking background and the pavement surface, the marking shall include:

- a) A black border where the inscriptions are in black; and
- b) A yellow border where the inscriptions are in yellow.

5.2.17.8 The character height shall be 4 m. The inscriptions shall be in the form and proportions shown in Appendix 3.



## 5.3 Lights

### 5.3.1 General

#### **Lights which may endanger the safety of aircraft**

5.3.1.1 A non-aeronautical ground light near an aerodrome which might endanger the safety of aircraft shall be extinguished, screened or otherwise modified so as to eliminate the source of danger.

#### **Laser emissions which may endanger the safety of aircraft**

5.3.1.2 To protect the safety of aircraft against the hazardous effects of laser emitters, the following protected zones shall be established around aerodromes:

- A laser-beam free flight zone (LFFZ)
- A laser-beam critical flight zone (LCFZ)
- A laser-beam sensitive flight zone (LSFZ).


**Note 1:** *Figures 5-11, 5-12 and 5-13 may be used to determine the exposure levels and distances that adequately protect flight operations.*

**Note 2:** *The restrictions on the use of laser beams in the three protected flight zones, LFFZ, LCFZ and LSFZ, refer to visible laser beams only. Laser emitters operated by the authorities in a manner compatible with flight safety are excluded. In all navigable airspace, the irradiance level of any laser beam, visible or invisible, is expected to be less than or equal to the maximum permissible exposure (MPE) unless such emission has been notified to the authority and permission obtained.*


**Note 3:** *The protected flight zones are established in order to mitigate the risk of operating laser emitters in the vicinity of aerodromes.*

**Note 4:** *Further guidance on how to protect flight operations from the hazardous effects of laser emitters is contained in the Manual on Laser Emitters and Flight Safety (Doc 9815).*


**Note 5:** *See also Annex 11 – ATS Chapter 2*

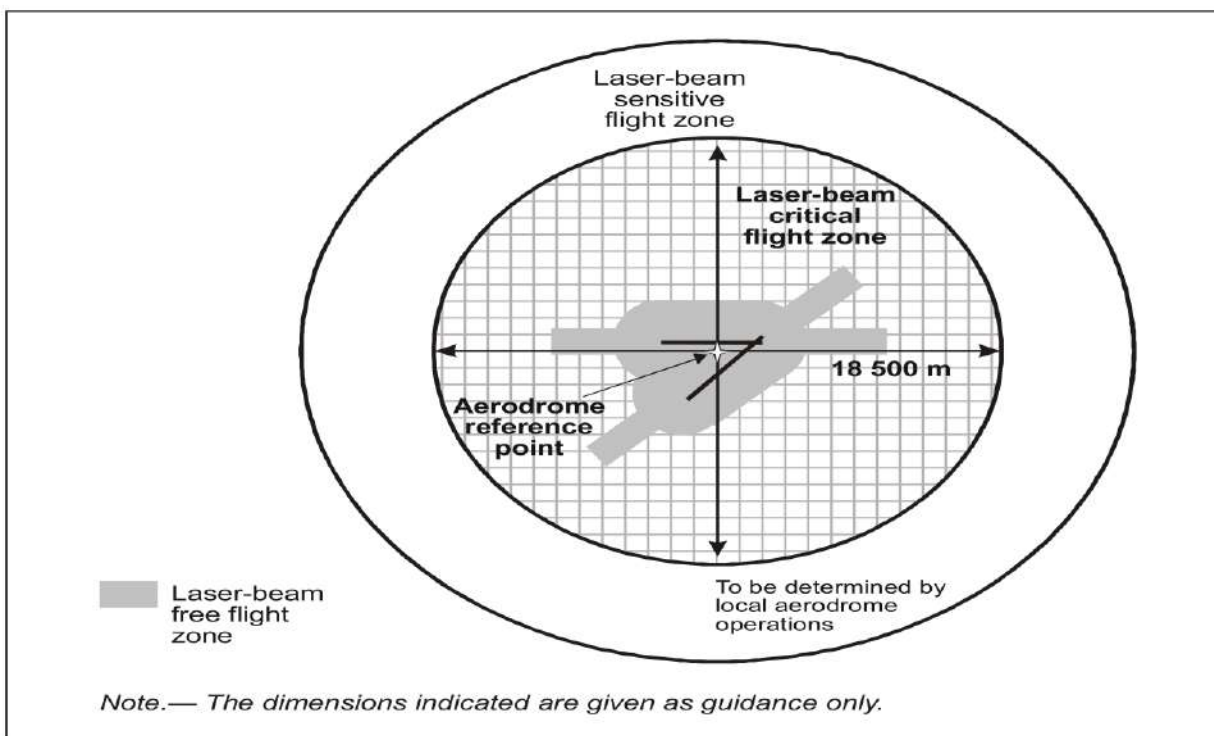

**Figure 5-11. Protected Flight Zone**

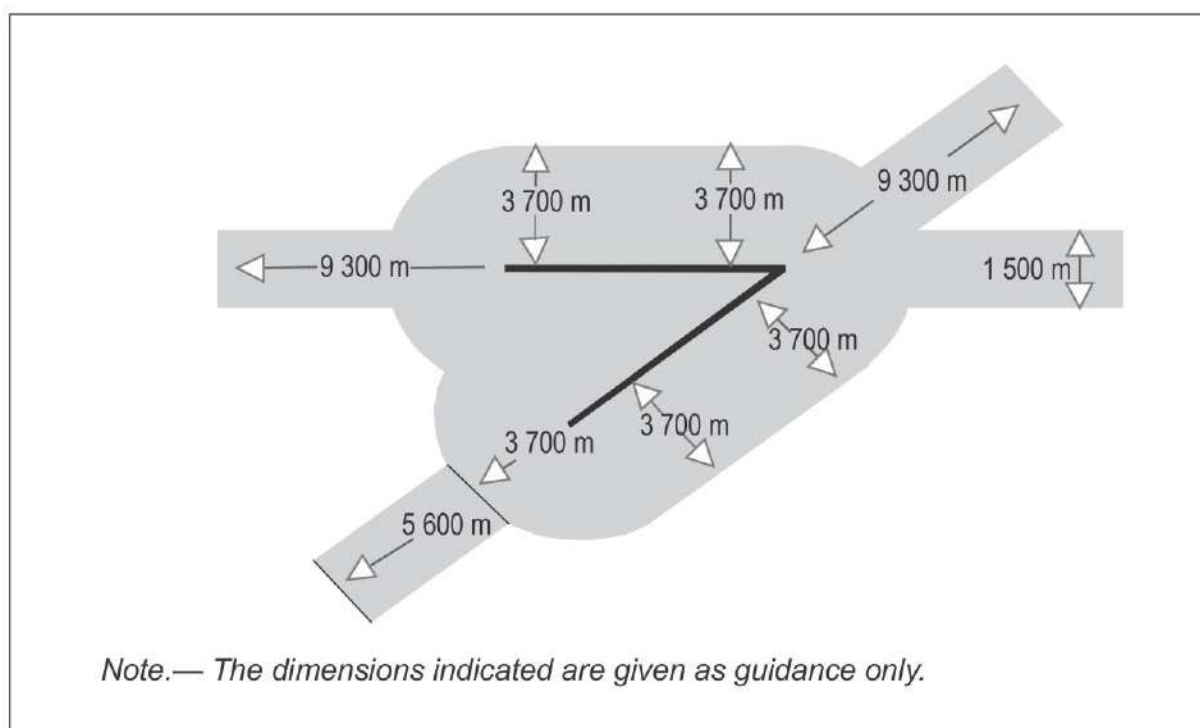

**Figure 5-12. Multiple runway laser-beam free flight zone**

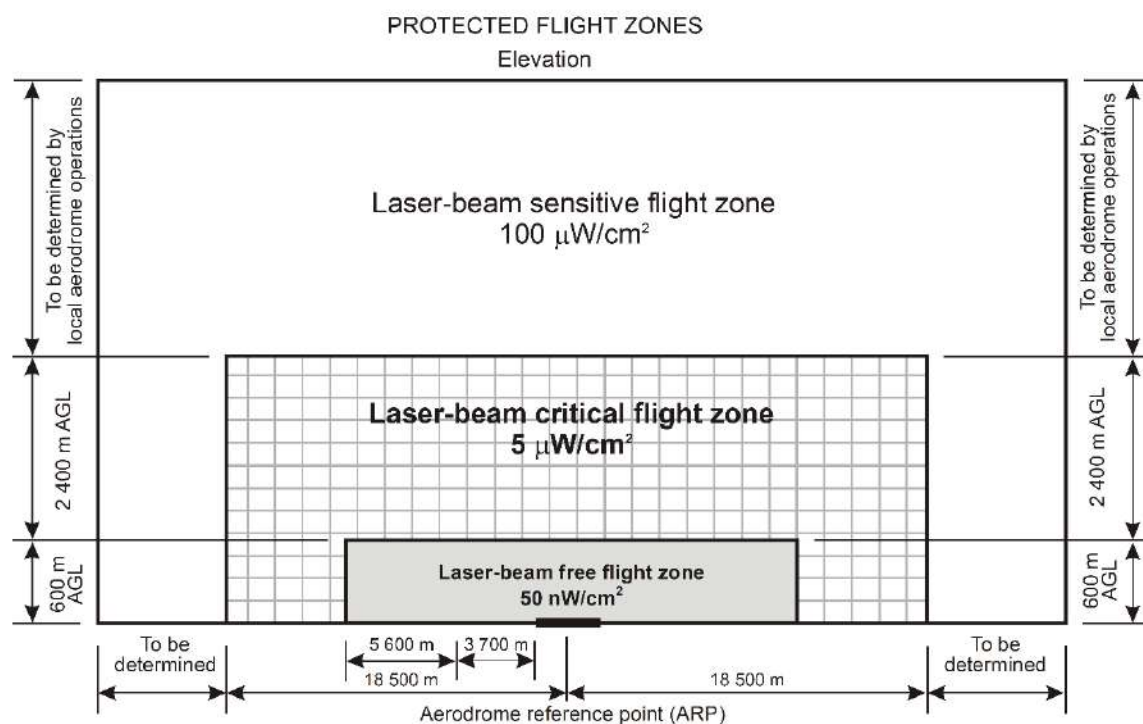

**Figure 5-13. Protected flight zones with indication of maximum irradiance levels for visible laser beams**

### Lights which may cause confusion

5.3.1.3 A non-aeronautical ground light which, by reason of its intensity, configuration or colour, might prevent, or cause confusion in, the clear interpretation of aeronautical ground lights shall be extinguished, screened or otherwise modified so as to eliminate such a possibility. In particular, attention shall be directed to a non-aeronautical ground light visible from the air within the areas described hereunder:

- a) Instrument runway — code number 4:

Within the areas before the threshold and beyond the end of the runway extending at least 4 500 m in length from the threshold and runway end and 750 m either side of the extended runway centre line in width.

- b) Instrument runway — code number 2 or 3:

As in a), except that the length shall be at least 3 000 m.

- c) Instrument runway — code number 1;

And non-instrument runway:

Within the approach area.

## **Aeronautical ground lights which may cause confusion to mariners**

**Note:** *In the case of aeronautical ground lights near navigable waters, consideration needs to be given to ensuring that the lights do not cause confusion to mariners.*

## **Light fixtures and supporting structures**

**Note:** *See 9.9 for information regarding siting of equipment and installations on operational areas, and the Aerodrome Design Manual (Doc 9157), Part 6, for guidance on frangibility of light fixtures and supporting structures.*

## **Other Lights which may cause confusion**

**Note:** *No light shall be permitted in an aerodrome that in the opinion of PACA may cause glare/dazzle to airport users.*

## **Elevated approach lights**

5.3.1.4 Elevated approach lights and their supporting structures shall be frangible except that, in that portion of the approach lighting system beyond 300 m from the threshold:

- a) Where the height of a supporting structure exceeds 12 m, the frangibility requirement shall apply to the top 12 m only; and
- b) Where a supporting structure is surrounded by non-frangible objects, only that part of the structure that extends above the surrounding objects shall be frangible.

5.3.1.5 When an approach light fixture or supporting structure is not in itself sufficiently conspicuous, it shall be suitably marked. (preferably yellow)

## **Elevated lights**

5.3.1.6 Elevated runway, stopway and taxiway lights shall be frangible. Their height shall be sufficiently low to preserve clearance for propellers and for the engine pods of jet aircraft.

## **Surface lights**

5.3.1.7 Light fixtures inset in the surface of runways, stopways, taxiways and aprons shall be so designed and fitted as to withstand being run over by the wheels of an aircraft without damage either to the aircraft or to the lights themselves.

5.3.1.8 The temperature produced by conduction or radiation at the interface between an installed inset light and an aircraft tire shall not exceed 160°C during a 10-minute period of exposure.

**Note:** *Guidance on measuring the temperature of inset lights is given in the Aerodrome Design Manual (Doc 9157), Part 4.*

## Light intensity and control

**Note:** *In dusk or poor visibility conditions by day, lighting can be more effective than marking. For lights to be effective in such conditions or in poor visibility by night, they must be of adequate intensity. To obtain the required intensity, it will usually be necessary to make the light directional, in which case the arcs over which the light shows will have to be adequate and so orientated as to meet the operational requirements. The runway lighting system will have to be considered as a whole, to ensure that the relative light intensities are suitably matched to the same end. (See Attachment A, Section 15, and the Aerodrome Design Manual (Doc 9157), Part 4).*

5.3.1.9 The intensity of runway lighting shall be adequate for the minimum conditions of visibility and ambient light in which use of the runway is intended, and compatible with that of the nearest section of the approach lighting system when provided.

**Note:** *While the lights of an approach lighting system may be of higher intensity than the runway lighting, it is good practice to avoid abrupt changes in intensity as these could give a pilot a false impression that the visibility is changing during approach.*

5.3.1.10 Where a high-intensity lighting system is provided, a suitable intensity control shall be incorporated to allow for adjustment of the light intensity to meet the prevailing conditions. Separate intensity controls or other suitable methods shall be provided to ensure that the following systems, when installed, can be operated at compatible intensities:

- Approach lighting system;
- Runway edge lights;
- Runway threshold lights;
- Runway end lights;
- Runway centre line lights;
- Runway touchdown zone lights; and
- Taxiway centre line lights.

5.3.1.11 On the perimeter of and within the ellipse defining the main beam in Appendix 2, Figures A2-1 to A2-10, the maximum light intensity value shall not be greater than three times the minimum light intensity value measured in accordance with Appendix 2, collective notes for Figures A2-1 to A2-11, Note 2.

5.3.1.12 On the perimeter of and within the rectangle defining the main beam in Appendix 2, Figures A2-12 to A2-20, the maximum light intensity value shall not be greater than three times the minimum light intensity value measured in accordance with Appendix 2, collective notes for Figures A2-12 to A2-21, Note 2.

### 5.3.2 Emergency lighting

#### Application

5.3.2.1 At an aerodrome sufficient emergency lights shall be conveniently available for installation on at least the primary runway in the event of failure of the normal lighting system.

***Note:** Emergency lighting may also be useful to mark obstacles or delineate taxiways and apron areas.*

#### Location

5.3.2.2 When installed on a runway the emergency lights shall, as a minimum, conform to the configuration required for a non-instrument runway.

#### Characteristics

5.3.2.3 The colour of the emergency lights shall conform to the colour requirements for runway lighting, except that, where the provision of coloured lights at the threshold and the runway end is not practicable, all lights may be variable white or as close to variable white as practicable.

### 5.3.3 Aeronautical beacons

#### Application

5.3.3.1 Where operationally necessary an aerodrome beacon or an identification beacon shall be provided at each aerodrome intended for use at night.

5.3.3.2 The operational requirement shall be determined having regard to the requirements of the air traffic using the aerodrome, the conspicuity of the aerodrome features in relation to its surroundings and the installation of other visual and non-visual aids useful in locating the aerodrome.

#### Aerodrome beacon

5.3.3.3 An aerodrome beacon shall be provided at an aerodrome intended for use at night if one or more of the following conditions exist:

- a. Aircraft navigate predominantly by visual means;
- b. Reduced visibilities are frequent; or
- c. It is difficult to locate the aerodrome from the air due to surrounding lights or terrain.

## Location

5.3.3.4 The aerodrome beacon shall be located on or adjacent to the aerodrome in an area of low ambient background lighting.

5.3.3.5 The location of the beacon shall be such that the beacon is not shielded by objects in significant directions and does not dazzle a pilot approaching to land.

## Characteristics

5.3.3.6 The aerodrome beacon shall show either coloured flashes alternating with white flashes, or white flashes only. The frequency of total flashes shall be from 20 to 30 per minute. Where used, the coloured flashes emitted by beacons at land aerodromes shall be green, and coloured flashes emitted by beacons at water aerodromes shall be yellow. In the case of a combined water and land aerodrome, coloured flashes, if used, shall have the colour characteristics of whichever section of the aerodrome is designated as the principal facility.

5.3.3.7 The light from the beacon shall show at all angles of azimuth. The vertical light distribution shall extend upwards from an elevation of not more than 1° to an elevation determined by the appropriate authority to be sufficient to provide guidance at the maximum elevation at which the beacon is intended to be used, and the effective intensity of the flash shall be not less than 2 000 cd.

**Note:** *At locations where a high ambient background lighting level cannot be avoided, the effective intensity of the flash may be required to be increased by a factor up to a value of 10.*

## Identification beacon

### Application

5.3.3.8 An identification beacon shall be provided at an aerodrome which is intended for use at night and cannot be easily identified from the air by other means.

## Location

5.3.3.9 The identification beacon shall be located on the aerodrome in an area of low ambient background lighting.

5.3.3.10 The location of the beacon shall be such that the beacon is not shielded by objects insignificant directions and does not dazzle a pilot approaching to land.

## Characteristics

5.3.3.11 An identification beacon at a land aerodrome shall show at all angles of azimuth. The vertical light distribution shall extend upwards from an elevation of not more than 1° to an elevation determined by the appropriate authority to be sufficient to provide guidance at the

maximum elevation at which the beacon is intended to be used, and the effective intensity of the flash shall be not less than 2 000 cd.

**Note:** *At locations where a high ambient background lighting level cannot be avoided, the effective intensity of the flash may be required to be increased by a factor up to a value of 10.*

5.3.3.12 An identification beacon shall show flashing-green at a land aerodrome and flashing-yellow at a water aerodrome.

5.3.3.13 The identification characters shall be transmitted in the International Morse Code.

5.3.3.14 The speed of transmission shall be between six and eight words per minute, the corresponding range of duration of the Morse dots being from 0.15 to 0.2 seconds per dot.

## 5.3.4 Approach lighting systems

### Application

#### 5.3.4.1 Application

##### A. Non-instrument runway

Where physically practicable, a simple approach lighting system as specified in 5.3.4.2 to 5.3.4.9 shall be provided to serve a non-instrument runway where the code number is 3 or 4 and intended for use at night, except when the runway is used only in conditions of good visibility and sufficient guidance is provided by other visual aids.

**Note:** *A simple approach lighting system can also provide visual guidance by day.*

##### B. Non-precision approach runway

Where physically practicable, a simple approach lighting system as specified in 5.3.4.2 to 5.3.4.9 shall be provided to serve a non-precision approach runway, except when the runway is used only in conditions of good visibility or sufficient guidance is provided by other visual aids.

**Note:** *It is advisable to give consideration to the installation of a precision approach category I lighting system or to the addition of a runway lead-in lighting system.*

##### C. Precision approach runway category I

Where physically practicable, a precision approach category I lighting system as specified in 5.3.4.10 to 5.3.4.21 shall be provided to serve a precision approach runway category I.

##### D. Precision approach runway categories II and III

A precision approach category II and III lighting system as specified in 5.3.4.22 to 5.3.4.39 shall be provided to serve a precision approach runway category II or III.



## Simple approach lighting system

### Location

5.3.4.2 A simple approach lighting system shall consist of a row of lights on the extended centre line of the runway extending, whenever possible, over a distance of not less than 420 m from the threshold with a row of lights forming a crossbar 18 m or 30 m in length at a distance of 300 m from the threshold.

5.3.4.3 The lights forming the crossbar shall be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights. The lights of the crossbar shall be spaced so as to produce a linear effect, except that, when a crossbar of 30 m is used, gaps may be left on each side of the centre line. These gaps shall be kept to a minimum to meet local requirements and each shall not exceed 6 m.

***Note 1:** Spacings for the crossbar lights between 1 m and 4 m are in use. Gaps on each side of the centre line may improve directional guidance when approaches are made with a lateral error, and facilitate the movement of rescue and fire fighting vehicles.*

***Note 2:** See Attachment A, Section 12, for guidance on installation tolerances.*

5.3.4.4 The lights forming the centre line shall be placed at longitudinal intervals of 60 m, except that, when it is desired to improve the guidance, an interval of 30 m may be used. The innermost light shall be located either 60 m or 30 m from the threshold, depending on the longitudinal interval selected for the centre line lights.

5.3.4.5 If it is not physically possible to provide a centre line extending for a distance of 420 m from the threshold, it shall be extended to 300 m so as to include the crossbar. If this is not possible, the centre line lights shall be extended as far as practicable, and each centre line light shall then consist of a barrette at least 3 m in length. Subject to the approach system having a crossbar at 300 m from the threshold, an additional crossbar may be provided at 150 m from the threshold.

5.3.4.6 The system shall lie as nearly as practicable in the horizontal plane passing through the threshold, provided that:

- a) No object other than an ILS or MLS azimuth antenna shall protrude through the plane of the approach lights within a distance of 60 m from the centre line of the system; and
- b) No light other than a light located within the central part of a crossbar or a centre line barrette (not their extremities) shall be screened from an approaching aircraft.

Any ILS or MLS azimuth antenna protruding through the plane of the lights shall be treated as an obstacle and marked and lighted accordingly.

## Characteristics

5.3.4.7 The lights of a simple approach lighting system shall be fixed lights and the colour of the lights shall be such as to ensure that the system is readily distinguishable from other aeronautical ground lights, and from extraneous lighting if present. Each centre line light shall consist of either:

- a) A single source; or
- b) A barrette at least 3 m in length.

**Note 1:** *When the barrette as in b) is composed of lights approximating to point sources, a spacing of 1.5 m between adjacent lights in the barrette has been found satisfactory.*

**Note 2:** *It may be advisable to use barrettes 4 m in length if it is anticipated that the simple approach lighting system will be developed into a precision approach lighting system.*

**Note 3:** *At locations where identification of the simple approach lighting system is difficult at night due to surrounding lights, sequence flashing lights installed in the outer portion of the system may resolve this problem.*

5.3.4.8 Where provided for a non-instrument runway, the lights shall show at all angles in azimuth necessary to a pilot on base leg and final approach. The intensity of the lights shall be adequate for all conditions of visibility and ambient light for which the system has been provided.

5.3.4.9 Where provided for a non-precision approach runway, the lights shall show at all angles in azimuth necessary to the pilot of an aircraft which on final approach does not deviate by an abnormal amount from the path defined by the non-visual aid. The lights shall be designed to provide guidance during both day and night in the most adverse conditions of visibility and ambient light for which it is intended that the system shall remain usable.

## Precision approach category I lighting system

### Location

5.3.4.10 A precision approach category I lighting system shall consist of a row of lights on the extended centre line of the runway extending, wherever possible, over a distance of 900 m from the runway threshold with a row of lights forming a crossbar 30 m in length at a distance of 300 m from the runway threshold.

**Note:** *The installation of an approach lighting system of less than 900 m in length may result in operational limitations on the use of the runway. See Attachment A, Section 12.*

5.3.4.11 The lights forming the crossbar shall be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights. The lights of the crossbar shall be spaced so as to produce a linear effect, except that gaps may be left on each side of the centre line. These gaps shall be kept to a minimum to meet local requirements and each shall not exceed 6 m.

**Note 1:** *Spacings for the crossbar lights between 1 m and 4 m are in use. Gaps on each side of the centre line may improve directional guidance when approaches are made with a lateral error, and facilitate the movement of rescue and fire fighting vehicles.*

**Note 2:** *See Attachment A, Section 12, for guidance on installation tolerances.*

5.3.4.12 The lights forming the centre line shall be placed at longitudinal intervals of 30 m with the innermost light located 30 m from the threshold.

5.3.4.13 The system shall lie as nearly as practicable in the horizontal plane passing through the threshold, provided that:

- a) No object other than an ILS or MLS azimuth antenna shall protrude through the plane of the approach lights within a distance of 60 m from the centre line of the system; and
- b) No light other than a light located within the central part of a crossbar or a centre line barrette (not their extremities) shall be screened from an approaching aircraft.

Any ILS or MLS azimuth antenna protruding through the plane of the lights shall be treated as an obstacle and marked and lighted accordingly.

### Characteristics

5.3.4.14 The centre line and crossbar lights of a precision approach category I lighting system shall be fixed lights showing variable white. Each centre line light position shall consist of either:

- a) A single light source in the innermost 300 m of the centre line, two light sources in the central 300 m of the centre line and three light sources in the outer 300 m of the centre line to provide distance information; or
- b) A barrette.

5.3.4.15 Where the serviceability level of the approach lights specified as a maintenance objective in 10.5.9 can be demonstrated, each centre line light position may consist of either:

- a) A single light source; or
- b) A barrette.

5.3.4.16 The barrettes shall be at least 4 m in length. When barrettes are composed of lights approximating to point sources, the lights shall be uniformly spaced at intervals of not more than 1.5 m.

5.3.4.17 If the centre line consists of barrettes as described in 5.3.4.14 b) or 5.3.4.15 b), each barrette shall be supplemented by a flashing light, except where such lighting is considered unnecessary taking into account the characteristics of the system and the nature of the meteorological conditions.

5.3.4.18 Each flashing light as described in 5.3.4.17 shall be flashed twice a second in sequence, beginning with the outermost light and progressing toward the threshold to the innermost light of

the system. The design of the electrical circuit shall be such that these lights can be operated independently of the other lights of the approach lighting system.

5.3.4.19 If the centre line consists of lights as described in 5.3.4.14 a) or 5.3.4.15 a), additional crossbars of lights to the crossbar provided at 300 m from the threshold shall be provided at 150 m, 450 m, 600 m and 750 m from the threshold. The lights forming each crossbar shall be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights. The lights shall be spaced so as to produce a linear effect, except that gaps may be left on each side of the centre line. These gaps shall be kept to a minimum to meet local requirements and each shall not exceed 6 m.

**Note:** See Attachment A, Section 11, for detailed configuration.

5.3.4.20 Where the additional crossbars described in 5.3.4.19 are incorporated in the system, the outer ends of the crossbars shall lie on two straight lines that either are parallel to the line of the centre line lights or converge to meet the runway centre line 300 m from threshold.

5.3.4.21 The lights shall be in accordance with the specifications of Appendix 2, Figure A2-1

**Note:** The flight path envelopes used in the design of these lights are given in Attachment A, Figure A-6.

## **Precision approach category II and III lighting system**

### **Location**

5.3.4.22 The approach lighting system shall consist of a row of lights on the extended centre line of the runway, extending, wherever possible, over a distance of 900 m from the runway threshold. In addition, the system shall have two side rows of lights, extending 270 m from the threshold, and two crossbars, one at 150 m and one at 300 m from the threshold, all as shown in Figure 5-14. Where the serviceability level of the approach lights specified as maintenance objectives in 10.5.6 can be demonstrated, the system may have two side rows of lights, extending 240 m from the threshold, and two crossbars, one at 150 m and one at 300 m from the threshold, all as shown in Figure 5-15.

**Note:** The length of 900 m is based on providing guidance for operations under category I, II and III conditions. Reduced lengths may support category II and III operations but may impose limitations on category I operations. See Attachment A, Section 12.

5.3.4.23 The lights forming the centre line shall be placed at longitudinal intervals of 30 m with the innermost lights located 30 m from the threshold.

5.3.4.24 The lights forming the side rows shall be placed on each side of the centre line, at a longitudinal spacing equal to that of the centre line lights and with the first light located 30 m from the threshold. Where the serviceability level of the approach lights specified as maintenance objectives in 10.5.6 can be demonstrated, lights forming the side rows may be placed on each side of the centre line, at a longitudinal spacing of 60 m with the first light located 60 m from the

threshold. The lateral spacing (or gauge) between the innermost lights of the side rows shall be not less than 18 m nor more than 22.5 m, and preferably 18 m, but in any event shall be equal to that of the touchdown zone lights.

5.3.4.25 The crossbar provided at 150 m from the threshold shall fill in the gaps between the centre line and side row lights.

5.3.4.26 The crossbar provided at 300 m from the threshold shall extend on both sides of the centre line lights to a distance of 15 m from the centre line.


5.3.4.27 If the centre line beyond a distance of 300 m from the threshold consists of lights as described in 5.3.4.31 b) or 5.3.4.32 b), additional crossbars of lights shall be provided at 450 m, 600 m and 750 m from the threshold.

5.3.4.28 Where the additional crossbars described in 5.3.4.27 are incorporated in the system, the outer ends of these crossbars shall lie on two straight lines that either are parallel to the centre line or converge to meet the runway centre line 300 m from the threshold.


5.3.4.29 The system shall lie as nearly as practicable in the horizontal plane passing through the threshold, provided that:

- a) No object other than an ILS or MLS azimuth antenna shall protrude through the plane of the approach lights within a distance of 60 m from the centre line of the system; and
- b) No light other than a light located within the central part of a crossbar or a centre line barrette (not their extremities) shall be screened from an approaching aircraft.

Any ILS or MLS azimuth antenna protruding through the plane of the lights shall be treated as an obstacle and marked and lighted accordingly.

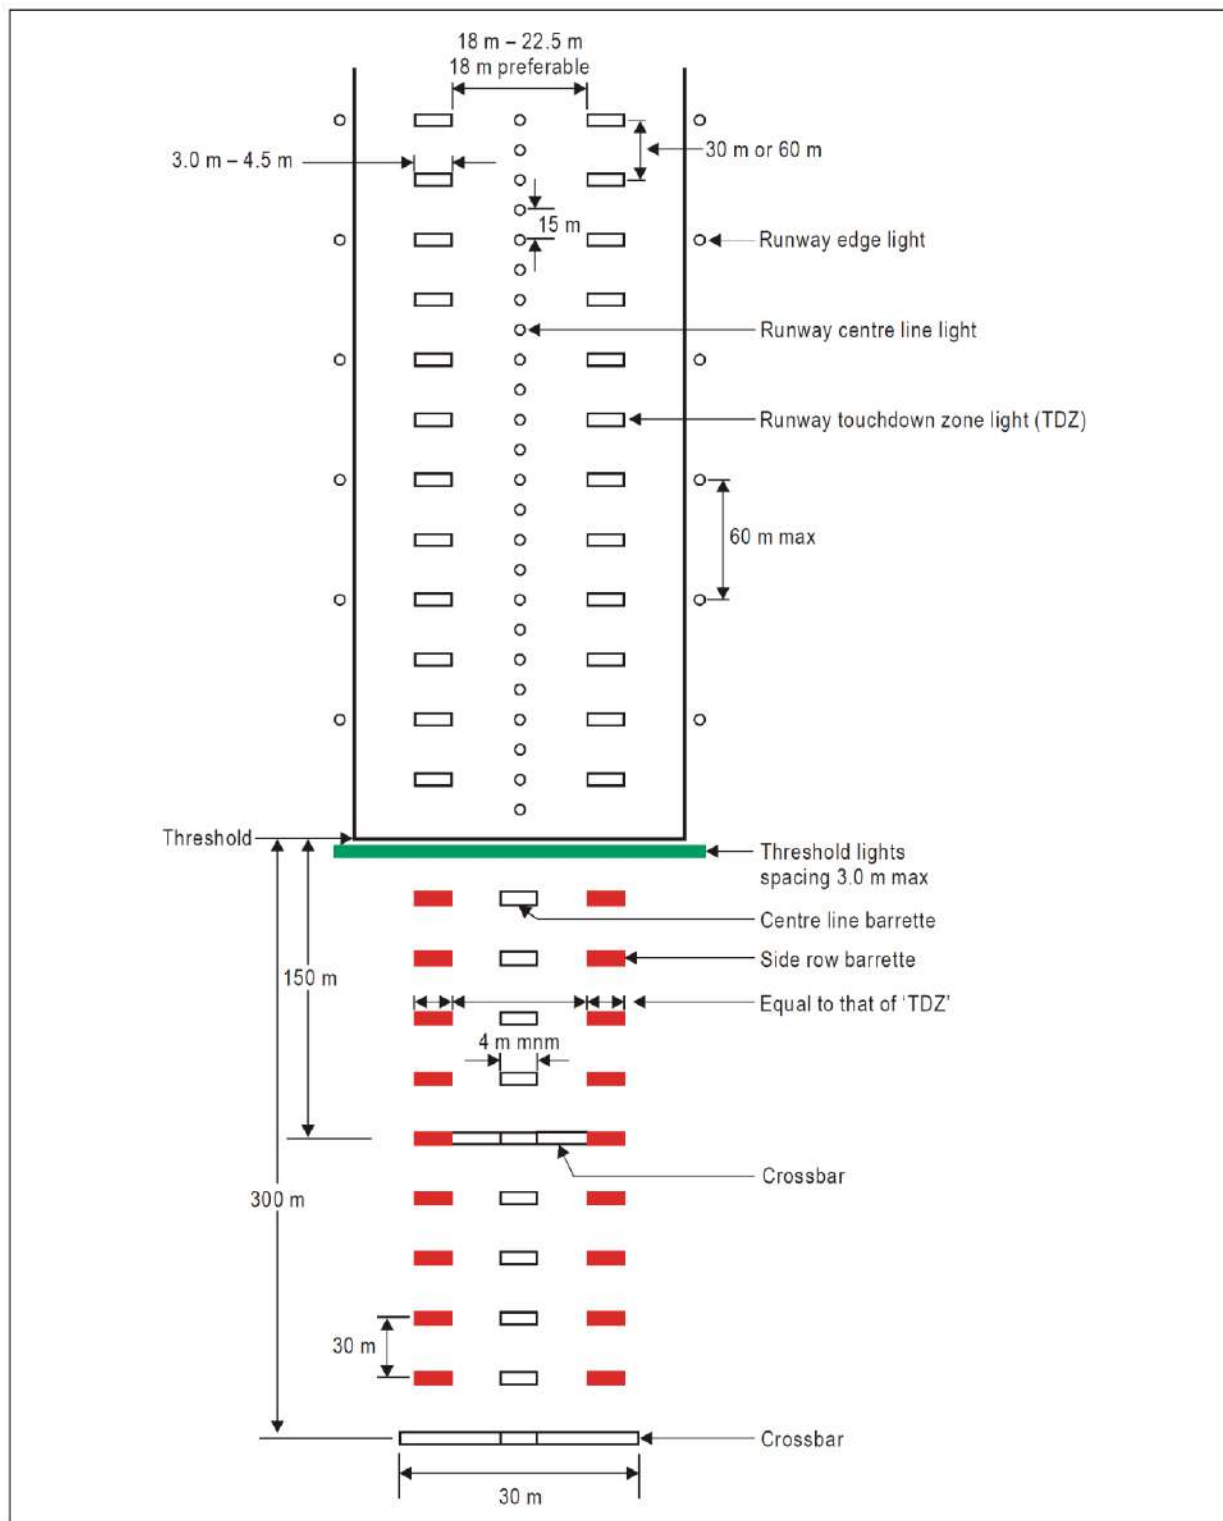

**Figure 5-14. Inner 300 m approach and runway lighting for precision approach runways, category II and III**

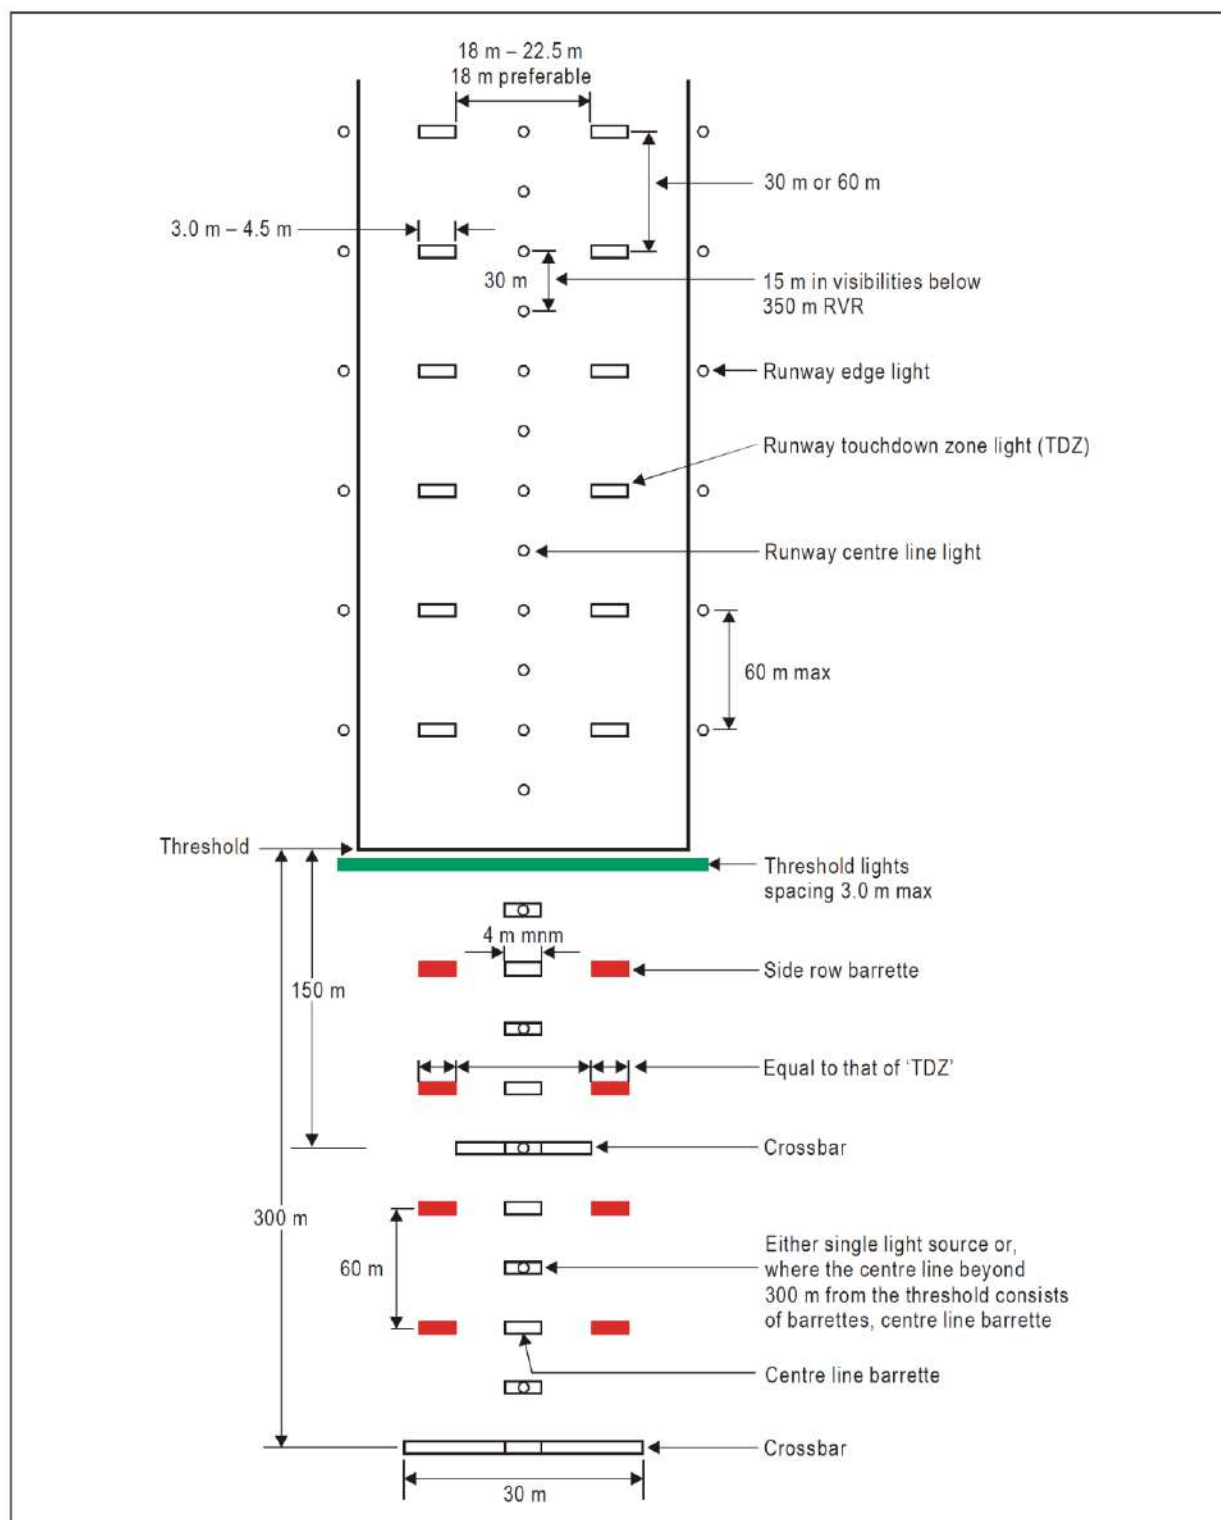

**Figure 5-15. Inner 300 m approach and runway lighting for precision approach runways, category II and III, where the serviceability levels of the lights specified as maintenance objectives in Chapter 10 can be demonstrated**

### Characteristics

5.3.4.30 The centre line of a precision approach category II and III lighting system for the first 300 m from the threshold shall consist of barrettes showing variable white, except that, where the threshold is displaced 300 m or more, the centre line may consist of single light sources showing variable white. Where the serviceability level of the approach lights specified as maintenance objectives in 10.5.6 can be demonstrated, the centre line of a precision approach category II and III lighting system for the first 300 m from the threshold may consist of either:

- a) Barrettes, where the centre line beyond 300 m from the threshold consists of        barrettes as described in 5.3.4.32 a); or
- b) Alternate single light sources and barrettes, where the centre line beyond 300 m from the threshold consists of single light sources as described in 5.3.4.32 b), with the innermost single light source located 30 m and the innermost barrette located 60 m from the threshold; or
- c) single light sources where the threshold is displaced 300 m or more;

All of which shall show variable white.

5.3.4.31 Beyond 300 m from the threshold each centre line light position shall consist of either:

- a) A barrette as used on the inner 300 m; or
- b) Two light sources in the central 300 m of the centre line and three light sources in the outer 300 m of the centre line;

All of which shall show variable white.

5.3.4.32 Where the serviceability level of the approach lights specified as maintenance objectives in 10.5.6 can be demonstrated, beyond 300 m from the threshold each centre line light position may consist of either:

- a) A barrette; or
- b) A single light source; all of which shall show variable white.

5.3.4.33 The barrettes shall be at least 4 m in length. When barrettes are composed of lights approximating to point sources, the lights shall be uniformly spaced at intervals of not more than 1.5 m.

5.3.4.34 If the centre line beyond 300 m from the threshold consists of barrettes as described in (5.3.4.31 a) or (5.3.4.32 a), each barrette beyond 300 m shall be supplemented by a flashing light, except where such lighting is considered unnecessary taking into account the characteristics of the system and the nature of the meteorological conditions.



5.3.4.35 Each flashing light as described in 5.3.4.34 shall be flashed twice a second in sequence, beginning with the outermost light and progressing toward the threshold to the innermost light of the system. The design of the electrical circuit shall be such that these lights can be operated independently of the other lights of the approach lighting system.

5.3.4.36 The side row shall consist of barrettes showing red. The length of a side row barrette and the spacing of its lights shall be equal to those of the touchdown zone light barrettes.

5.3.4.37 The lights forming the crossbars shall be fixed lights showing variable white. The lights shall be uniformly spaced at intervals of not more than 2.7 m.

5.3.4.38 The intensity of the red lights shall be compatible with the intensity of the white lights.

5.3.4.39 The lights shall be in accordance with the specifications of Appendix 2, Figures A21 and A2-2.

**Note:** *The flight path envelopes used in the design of these lights are given in Attachment A, Figure A-6.*

### 5.3.5 Visual approach slope indicator systems

#### Application

5.3.5.1 A visual approach slope indicator system shall be provided to serve the approach to a runway whether or not the runway is served by other visual approach aids or by non-visual aids, where one or more of the following conditions exist:

- a) The runway is used by turbojet or other aeroplanes with similar approach guidance requirements;
- b) The pilot of any type of aeroplane may have difficulty in judging the approach due to:
  - 1) Inadequate visual guidance such as is experienced during an approach over water or featureless terrain by day or in the absence of sufficient extraneous lights in the approach area by night; or
  - 2) Misleading information such as is produced by deceptive surrounding terrain or runway slopes;
- c) The presence of objects in the approach area may involve serious hazard if an aeroplane descends below the normal approach path, particularly if there are no non-visual or other visual aids to give warning of such objects;
- d) Physical conditions at either end of the runway present a serious hazard in the event of an aeroplane undershooting or overrunning the runway; and
- e) Terrain or prevalent meteorological conditions are such that the aeroplane may be subjected to unusual turbulence during approach.

**Note:** *Guidance on the priority of installation of visual approach slope indicator systems is contained in Attachment A, Section 13.*

5.3.5.2 The standard visual approach slope indicator systems shall consist of the following:

- a) T-VASIS and AT-VASIS conforming to the specifications contained in 5.3.5.6 to 5.3.5.22 inclusive;
- b) PAPI and APAPI systems conforming to the specifications contained in 5.3.5.23 to 5.3.5.40 inclusive;


As shown in Figure 5-16.

5.3.5.3 PAPI, T-VASIS or AT-VASIS shall be provided where the code number is 3 or 4 when one or more of the conditions specified in 5.3.5.1 exist.

5.3.5.4 As of 1 January 2020, the use of T-VASIS and AT-VASIS as standard visual approach slope indicator systems should be discontinued.

5.3.5.5 PAPI or APAPI shall be provided where the code number is 1 or 2 when one or more of the conditions specified in 5.3.5.1 exist.

5.3.5.6 Where a runway threshold is temporarily displaced from the normal position and one or more of the conditions specified in 5.3.5.1 exist, a PAPI shall be provided except that where the code number is 1 or 2 an APAPI may be provided.

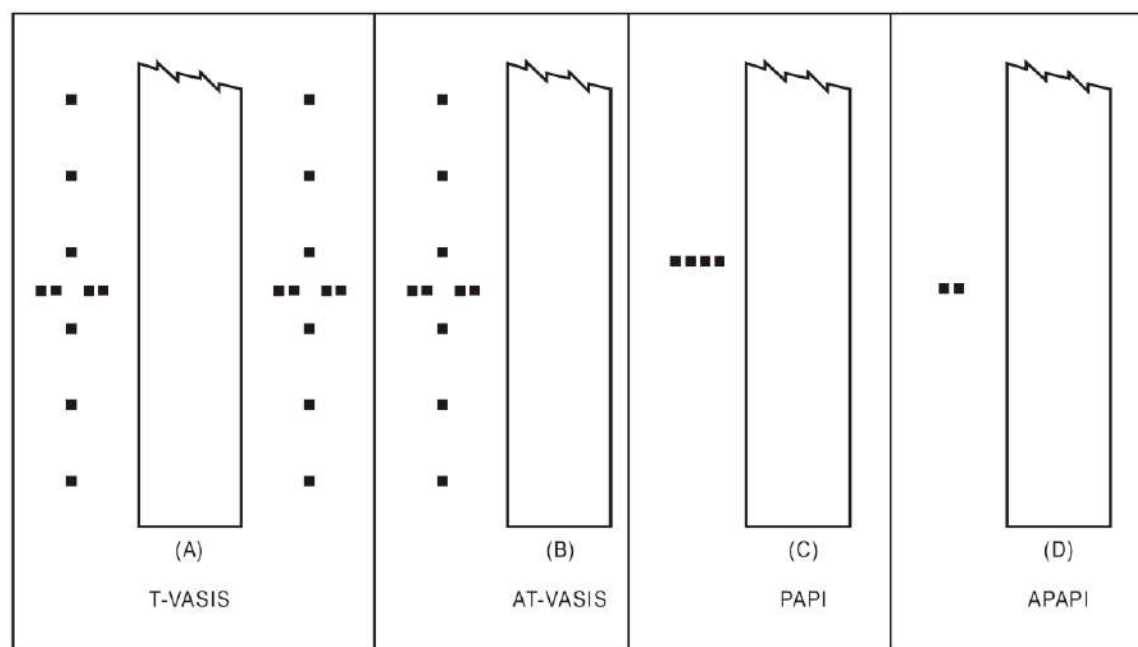

**Figure 5-16. Visual Approach Slope Indicator Systems**

## T-VASIS and AT-VASIS

### Description

5.3.5.7 The T-VASIS shall consist of twenty light units symmetrically disposed about the runway centre line in the form of two wing bars of four light units each, with bisecting longitudinal lines of six lights, as shown in Figure 5-17.

5.3.5.8 The AT-VASIS shall consist of ten light units arranged on one side of the runway in the form of a single wing bar of four light units with a bisecting longitudinal line of six lights.

5.3.5.9 The light units shall be constructed and arranged in such a manner that the pilot of an aeroplane during an approach will:

- a) when above the approach slope, see the wing bar(s) white, and one, two or three fly-down lights, the more fly-down lights being visible the higher the pilot is above the approach slope;
- b) when on the approach slope, see the wing bar(s) white; and
- c) when below the approach slope, see the wing bar(s) and one, two or three fly-up lights white, the more fly-up lights being visible the lower the pilot is below the approach slope; and when well below the approach slope, see the wing bar(s) and the three fly-up lights red.

When on or above the approach slope, no light shall be visible from the fly-up light units; when on or below the approach slope, no light shall be visible from the fly-down light units.

### Siting

5.3.5.10 The light units shall be located as shown in Figure 5-17, subject to the installation tolerances given therein.

**Note:** The siting of T-VASIS will provide, for a 3° slope and a nominal eye height over the threshold of 15 m (see 5.3.5.6 and 5.3.5.19), a pilot's eye height over threshold of 13 m to 17 m when only the wing bar lights are visible. If increased eye height at the threshold is required (to provide adequate wheel clearance), then the approaches may be flown with one or more fly-down lights visible. The pilot's eye height over the threshold is then of the following order:

Wing bar lights and one fly-down light visible	17 m to 22 m
Wing bar lights and two fly-down lights visible	22 m to 28 m
Wing bar lights and three fly-down lights visible	28 m to 54 m.

### Characteristics of the light units

5.3.5.11 The systems shall be suitable for both day and night operations.

5.3.5.12 The light distribution of the beam of each light unit shall be of fan shape showing over a wide arc in azimuth in the approach direction. The wing bar light units shall produce a beam of white light from 1°54' vertical angle up to 6° vertical angle and a beam of red light from 0° to 1°54' vertical angle. The fly-down light units shall produce a white beam extending from an elevation of 6° down to approximately the approach slope, where it shall have a sharp cut-off. The fly-up light units shall produce a white beam from approximately the approach slope down to 1°54' vertical angle and a red beam below a 1°54' vertical angle. The angle of the top of the red beam in the wing bar units and fly-up units may be increased to comply with 5.3.5.22.

5.3.5.13 The light intensity distribution of the fly-down, wing bar and fly-up light units shall be as shown in Appendix 2, Figure A2-22.


5.3.5.14 The colour transition from red to white in the vertical plane shall be such as to appear to an observer, at a distance of not less than 300 m, to occur over a vertical angle of not more than 15'.

5.3.5.15 At full intensity the red light shall have a Y coordinate not exceeding 0.320.

5.3.5.16 A suitable intensity control shall be provided to allow adjustments to meet the prevailing conditions and to avoid dazzling the pilot during approach and landing.

5.3.5.17 The light units forming the wing bars, or the light units forming a fly-down or a fly-up matched pair, shall be mounted so as to appear to the pilot of an approaching aeroplane to be substantially in a horizontal line. The light units shall be mounted as low as possible and shall be frangible.

5.3.5.18 The light units shall be so designed that deposits of condensation, dirt, etc., on optically transmitting or reflecting surfaces shall interfere to the least possible extent with the light signals and shall in no way affect the elevation of the beams or the contrast between the red and white signals. The construction of the light units shall be such as to minimize the probability of the slots being wholly or partially blocked by snow or ice where these conditions are likely to be encountered.

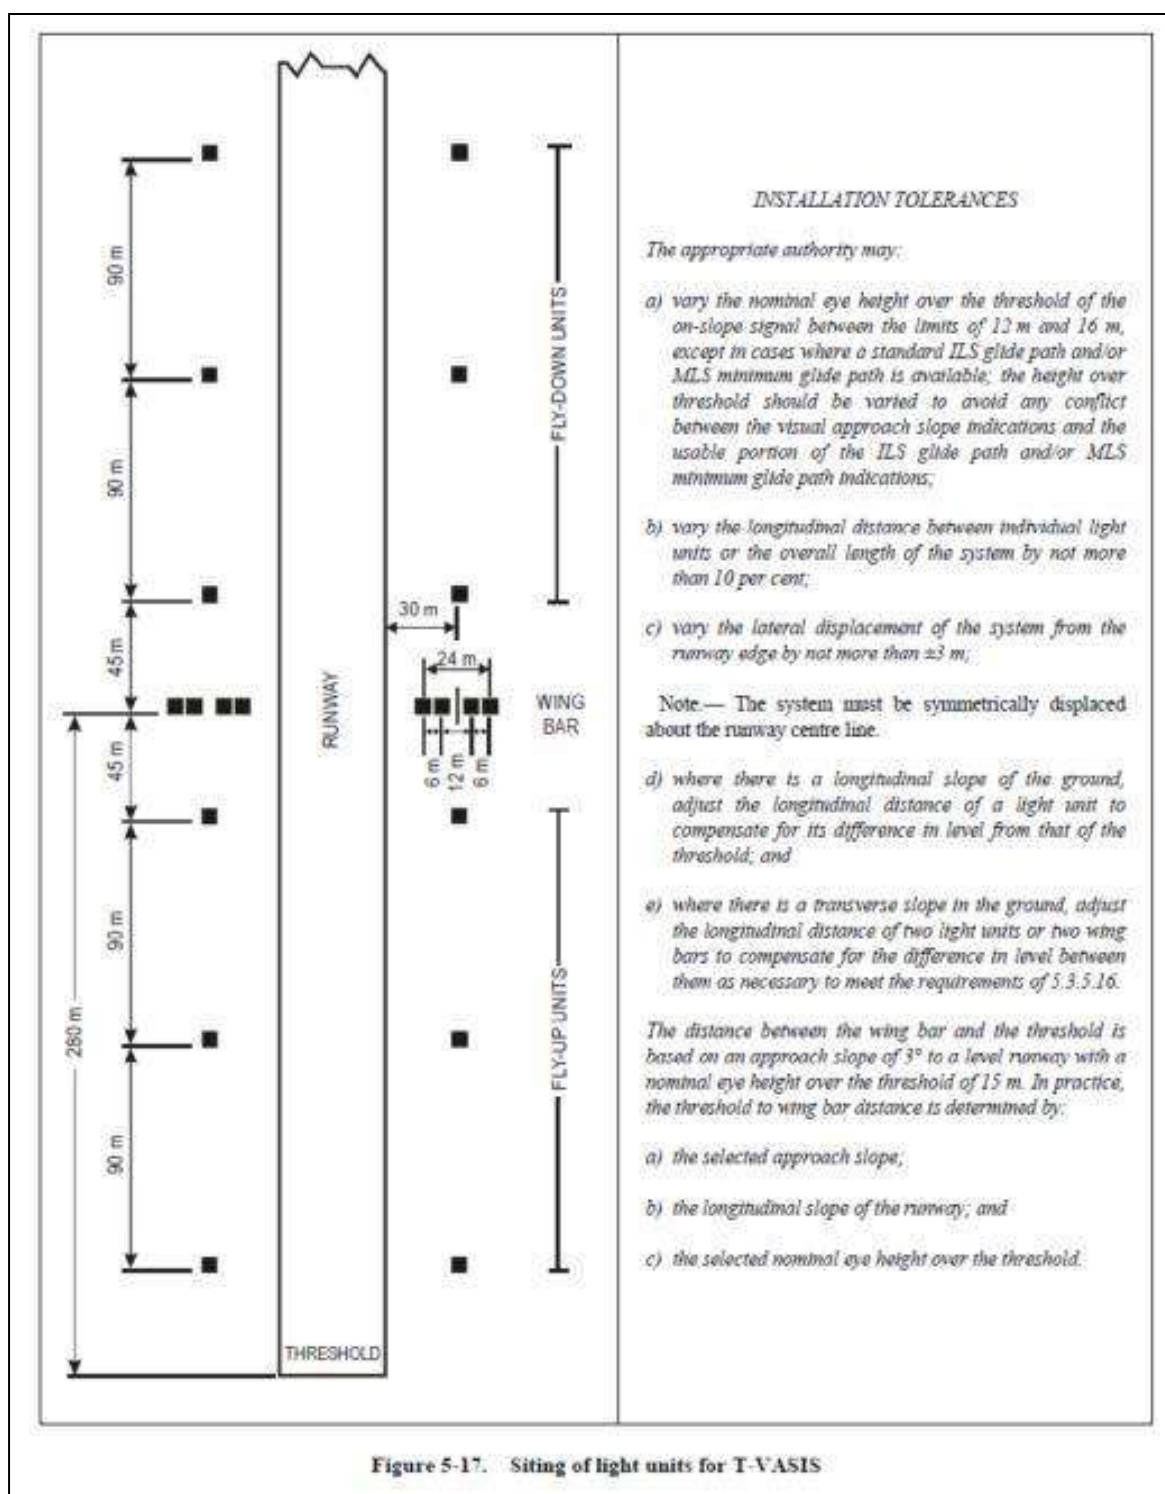

## Approach slope and elevation setting of light beams

5.3.5.19 The approach slope shall be appropriate for use by the aeroplanes using the approach.

5.3.5.20 When the runway on which a T-VASIS is provided is equipped with an ILS and/or MLS, the siting and elevations of the light units shall be such that the visual approach slope conforms as closely as possible with the glide path of the ILS and/or the minimum glide path of the MLS, as appropriate.

5.3.5.21 The elevation of the beams of the wing bar light units on both sides of the runway shall be the same. The elevation of the top of the beam of the fly-up light unit nearest to each wing bar, and that of the bottom of the beam of the fly-down light unit nearest to each wing bar, shall be equal and shall correspond to the approach slope. The cut-off angle of the top of the beams of successive fly-up light units shall decrease by 5' of arc in angle of elevation at each successive unit away from the wing bar. The cut-in angle of the bottom of the beam of the fly-down light units shall increase by 7' of arc at each successive unit away from the wing bar (see Figure 5-18).

5.3.5.22 The elevation setting of the top of the red light beams of the wing bar and fly-up light units shall be such that, during an approach, the pilot of an airplane to whom the wing bar and three fly-up light units are visible would clear all objects in the approach area by a safe margin if any such light did not appear red.

5.3.5.23 The azimuth spread of the light beam shall be suitably restricted where an object located outside the obstacle protection surface of the system, but within the lateral limits of its light beam, is found to extend above the plane of the obstacle protection surface and an aeronautical study indicates that the object could adversely affect the safety of operations. The extent of the restriction shall be such that the object remains outside the confines of the light beam.

**Note:** See 5.3.5.41 to 5.3.5.45 concerning the related obstacle protection surface.

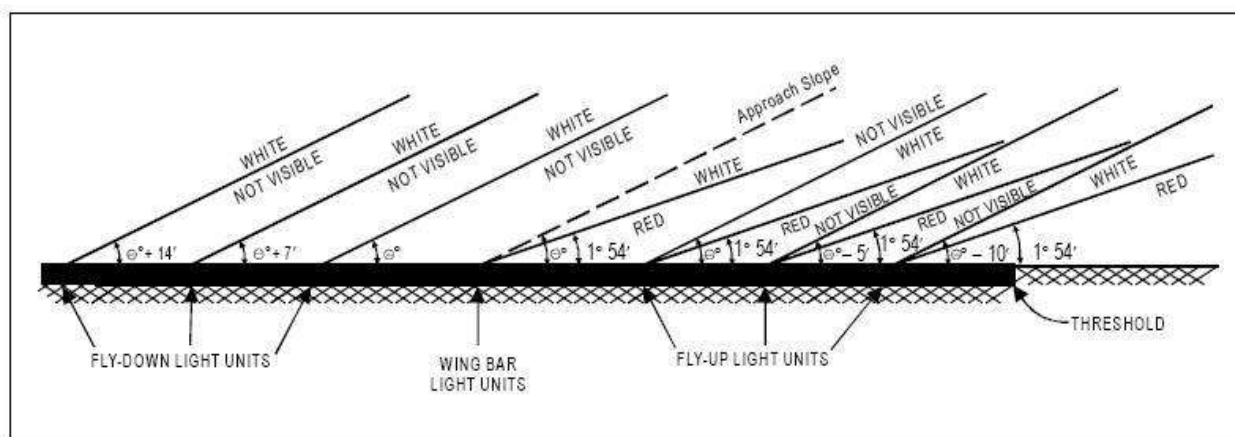


Figure 5-18. Light beams and elevation settings of T-VASIS and AT-VASIS

## PAPI and APAPI

### Description

5.3.5.24 The PAPI system shall consist of a wing bar of four sharp transition multi-lamp (or paired single lamp) units equally spaced. The system shall be located on the left side of the runway unless it is physically impracticable to do so.

**Note:** Where a runway is used by aircraft requiring visual roll guidance which is not provided by other external means, then a second wing bar may be provided on the opposite side of the runway.

5.3.5.25 The APAPI system shall consist of a wing bar of two sharp transition multi-lamp (or paired single lamp) units. The system shall be located on the left side of the runway unless it is physically impracticable to do so.

**Note:** Where a runway is used by aircraft requiring visual roll guidance which is not provided by other external means, then a second wing bar may be provided on the opposite side of the runway.

5.3.5.26 The wing bar of a PAPI shall be constructed and arranged in such a manner that a pilot making an approach will:

- a) When on or close to the approach slope, see the two units nearest the runway as red and the two units farthest from the runway as white;
- b) When above the approach slope, see the one unit nearest the runway as red and the three units farthest from the runway as white; and when further above the approach slope, see all the units as white; and
- c) When below the approach slope, see the three units nearest the runway as red and the unit farthest from the runway as white; and when further below the approach slope, see all the units as red.

5.3.5.27 The wing bar of an APAPI shall be constructed and arranged in such a manner that a pilot making an approach will:

- a) when on or close to the approach slope, see the unit nearer the runway as red and the unit farther from the runway as white;
- b) When above the approach slope, see both the units as white; and
- c) When below the approach slope, see both the units as red.

### Siting

5.3.5.28 The light units shall be located as in the basic configuration illustrated in Figure 5-19, subject to the installation tolerances given therein. The units forming a wing bar shall be mounted so as to appear to the pilot of an approaching aeroplane to be substantially in a horizontal line. The light units shall be mounted as low as possible and shall be frangible.



---

**Characteristics of the light units**

5.3.5.29 The system shall be suitable for both day and night operations.

5.3.5.30 The colour transition from red to white in the vertical plane shall be such as to appear to an observer, at a distance of not less than 300 m, to occur within a vertical angle of not more than 3'.

5.3.5.31 At full intensity the red light shall have a Y coordinate not exceeding 0.320.


5.3.5.32 The light intensity distribution of the light units shall be as shown in Appendix 2, Figure A2-23.

**Note:** See the *Aerodrome Design Manual (Doc 9157), Part 4*, for additional guidance on the characteristics of light units.


5.3.5.33 Suitable intensity control shall be provided so as to allow adjustment to meet the prevailing conditions and to avoid dazzling the pilot during approach and landing.

5.3.5.34 Each light unit shall be capable of adjustment in elevation so that the lower limit of the white part of the beam may be fixed at any desired angle of elevation between 1°30' and at least 4°30' above the horizontal.

5.3.5.35 The light units shall be so designed that deposits of condensation, snow, ice, dirt, etc., on optically transmitting or reflecting surfaces shall interfere to the least possible extent with the light signals and shall not affect the contrast between the red and white signals and the elevation of the transition sector.

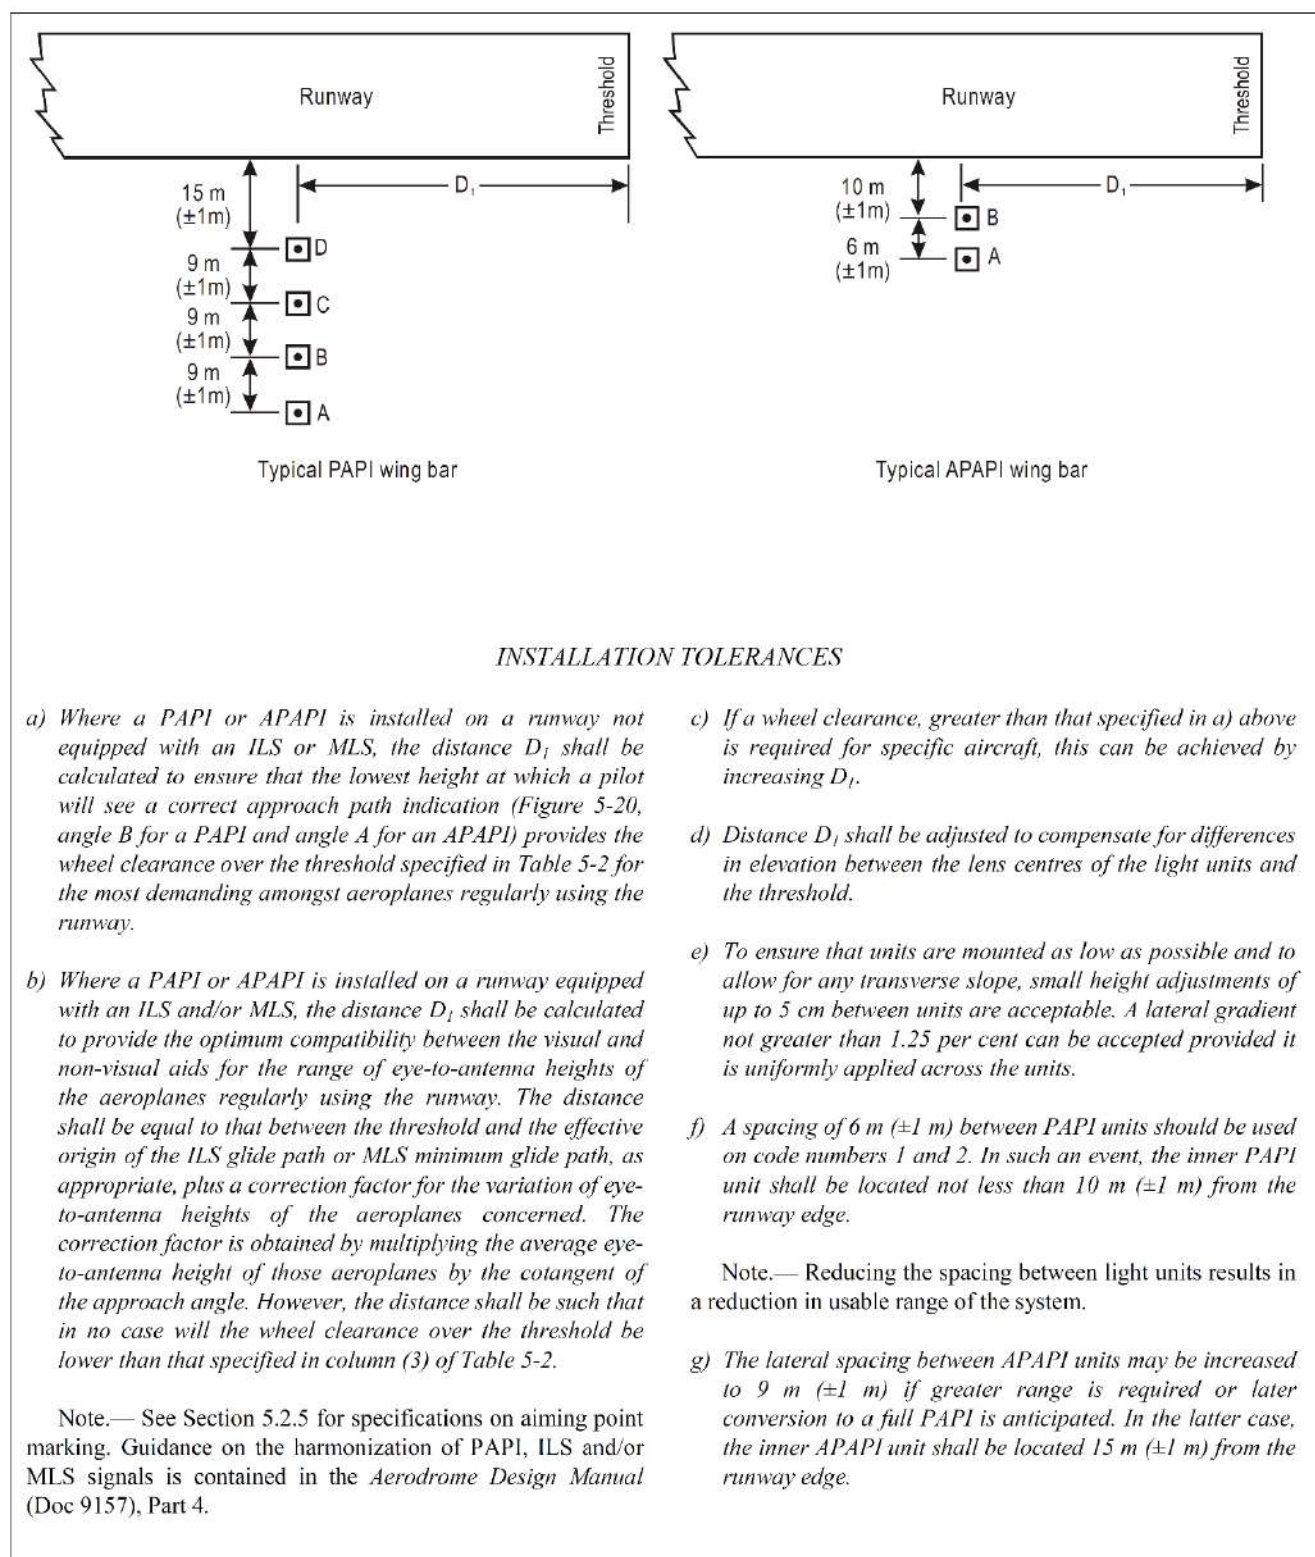


**Figure 5-19. Sitting of PAPI and APAPI**

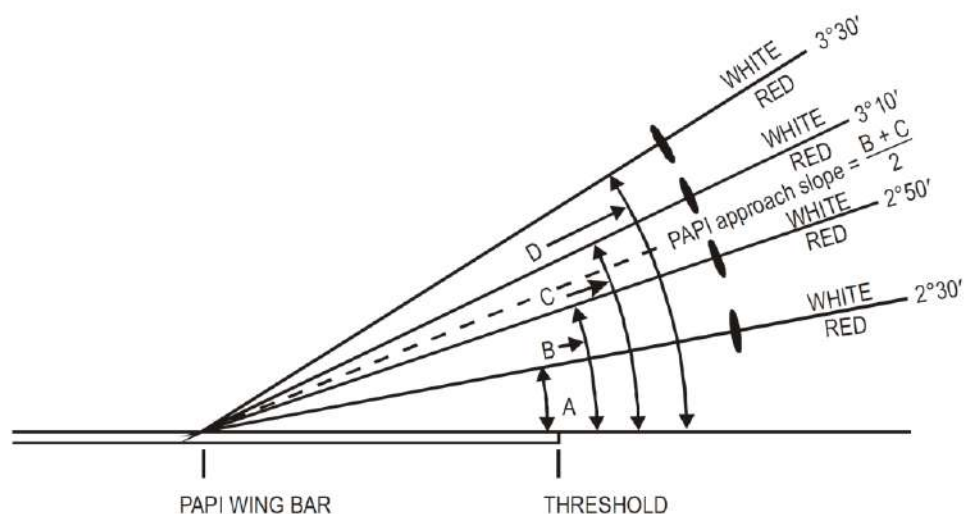

The height of the pilot's eye above the aircraft's ILS glide path/MLS antenna varies with the type of aeroplane and approach attitude. Harmonization of the PAPI signal and ILS glide path and/or MLS minimum glide path to a point closer to the threshold may be achieved by increasing the on-course sector from 20' to 30'. The setting angles for a 3° glide slope would then be 2°25', 2°45', 3°15' and 3°35'.

A — 3° PAPI ILLUSTRATED

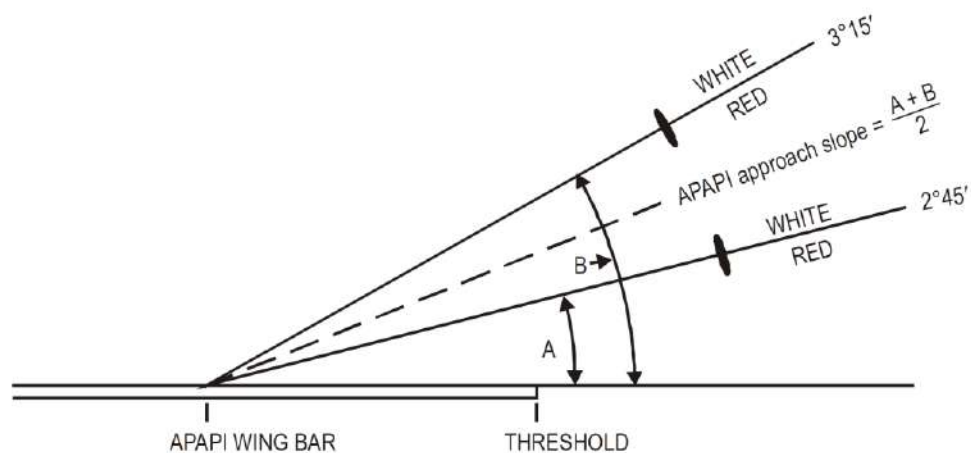

B — 3° APAPI ILLUSTRATED

**Figure 5-20. Light Beams and Angle of Elevation Setting of PAPI and APAPI**

**Table 5-2. Wheel clearance over threshold for PAPI and APAPI**

Eye-to-wheel height of aeroplane in the approach configuration <sup>a</sup>	Desired wheel clearance (metres) <sup>b,c</sup>	Minimum wheel clearance (metres) <sup>d</sup>
(1)	(2)	(3)
up to but not including 3 m	6	3 <sup>e</sup>
3 m up to but not including 5 m	9	4
5 m up to but not including 8 m	9	5
8 m up to but not including 14 m	9	6
<p>a. In selecting the eye-to-wheel height group, only aeroplanes meant to use the system on a regular basis shall be considered. The most demanding amongst such aeroplanes shall determine the eye-to-wheel height group.</p> <p>b. Where practicable the desired wheel clearances shown in column (2) shall be provided.</p> <p>c. The wheel clearances in column (2) may be reduced to no less than those in column (3) where an aeronautical study indicates that such reduced wheel clearances are acceptable.</p> <p>d. When a reduced wheel clearance is provided at a displaced threshold it shall be ensured that the corresponding desired wheel clearance specified in column (2) will be available when an aeroplane at the top end of the eye-to-wheel height group chosen overflies the extremity of the runway.</p> <p>e. This wheel clearance may be reduced to 1.5 m on runways used mainly by light-weight non-turbojet aeroplanes.</p>		

### Approach slope and elevation setting of light units

5.3.5.36 The approach slope as defined in Figure 5-20 shall be appropriate for use by the aeroplanes using the approach.

5.3.5.37 When the runway is equipped with an ILS and/or MLS, the siting and the angle of elevation of the light units shall be such that the visual approach slope conforms as closely as possible with the glide path of the ILS and/or the minimum glide path of the MLS, as appropriate.

5.3.5.38 The angle of elevation settings of the light units in a PAPI wing bar shall be such that, during an approach, the pilot of an aeroplane observing a signal of one white and three reds will clear all objects in the approach area by a safe margin (see Table 5-2).

5.3.5.39 The angle of elevation settings of the light units in an APAPI wing bar shall be such that, during an approach, the pilot of an aeroplane observing the lowest onslope signal, i.e. one white and one red, will clear all objects in the approach area by a safe margin (see Table 5-2).

5.3.5.40 The azimuth spread of the light beam shall be suitably restricted where an object located outside the obstacle protection surface of the PAPI or APAPI system, but within the lateral limits of its light beam, is found to extend above the plane of the obstacle protection surface and an aeronautical study indicates that the object could adversely affect the safety of operations. The extent of the restriction shall be such that the object remains outside the confines of the light beam.

**Note:** See 5.3.5.41 to 5.3.5.45 concerning the related obstacle protection surface.

5.3.5.41 Where wing bars are installed on each side of the runway to provide roll guidance, corresponding units shall be set at the same angle so that the signals of each wing bar change symmetrically at the same time.

### Obstacle protection surface

**Note:** The following specifications apply to T-VASIS, ATVASIS, PAPI and APAPI.

5.3.5.42 An obstacle protection surface shall be established when it is intended to provide a visual approach slope indicator system.

5.3.5.43 The characteristics of the obstacle protection surface, i.e. origin, divergence, length and slope, shall correspond to those specified in the relevant column of Table 5-3 and in Figure 5-21.

5.3.5.44 New objects or extensions of existing objects shall not be permitted above an obstacle protection surface except when, in the opinion of the appropriate authority, the new object or extension would be shielded by an existing immovable object.

**Note:** Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.

5.3.5.45 Existing objects above an obstacle protection surface shall be removed except when, in the opinion of the appropriate authority, the object is shielded by an existing immovable object, or

after aeronautical study it is determined that the object would not adversely affect the safety of operations of aeroplanes.

5.3.5.46 Where an aeronautical study indicates that an existing object extending above an obstacle protection surface could adversely affect the safety of operations of aeroplanes one or more of the following measures shall be taken:

- a) Remove the object;
- b) Suitably raise the approach slope of the system;
- c) Reduce the azimuth spread of the system so that the object is outside the confines of the beam;
- d) Displace the axis of the system and its associated obstacle protection surface by not more than 5°;
- e) Such that the object no longer penetrates the OPS.


**Note. 1:** Guidance on this issue is contained in the Aerodrome Design Manual (Doc 9157), Part 4.

**Note. 2:** The displacement of the system upwind of the threshold reduces the operational landing distance

**Table 5-3 Dimensions and slopes of the obstacle protection surface**

Surface dimensions	Runway type/code number							
	Non-instrument Code number				Instrument Code number			
	1	2	3	4	1	2	3	4
Length of inner edge	60 m	80 m <sup>a</sup>	150 m	150 m	150 m	150 m	300 m	300 m
Distance from the visual approach slope indicator system <sup>c</sup>	D <sub>I</sub> +30 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m	D <sub>I</sub> +60 m
Divergence (each side)	10%	10%	10%	10%	15%	15%	15%	15%
Total length	7 500 m	7 500 m <sup>b</sup>	15 000 m	15 000 m	7 500 m	7 500 m <sup>b</sup>	15 000 m	15 000 m
<i>Slope</i>								
a) T-VASIS and AT-VASIS	— <sup>c</sup>	1.9°	1.9°	1.9°	—	1.9°	1.9°	1.9°
b) PAPI <sup>d</sup>	—	A-0.57°	A-0.57°	A-0.57°	A-0.57°	A-0.57°	A-0.57°	A-0.57°
c) APAPI <sup>d</sup>	A-0.9°	A-0.9°	—	—	A-0.9°	A-0.9°	—	—
<sup>a.</sup> This length is to be increased to 150 m for a T-VASIS or AT-VASIS. <sup>b.</sup> This length is to be increased to 15 000 m for a T-VASIS or AT-VASIS. <sup>c.</sup> No slope has been specified if a system is unlikely to be used on runway type/code number indicated. <sup>d.</sup> Angles as indicated in Figure 5-20. <sup>e.</sup> D <sub>I</sub> is the distance of the visual approach slope indicator system from threshold prior to any displacement to remedy object penetration of the OPS (refer Figure 5-19). The start of the OPS is fixed to the visual approach slope indicator system location, such that displacement of the PAPI results in an equal displacement of the start of the OPS. See 5.3.5.46 e).								

**Figure 5-21. Obstacle Protection Surface for Visual Approach Slope Indicator Systems**

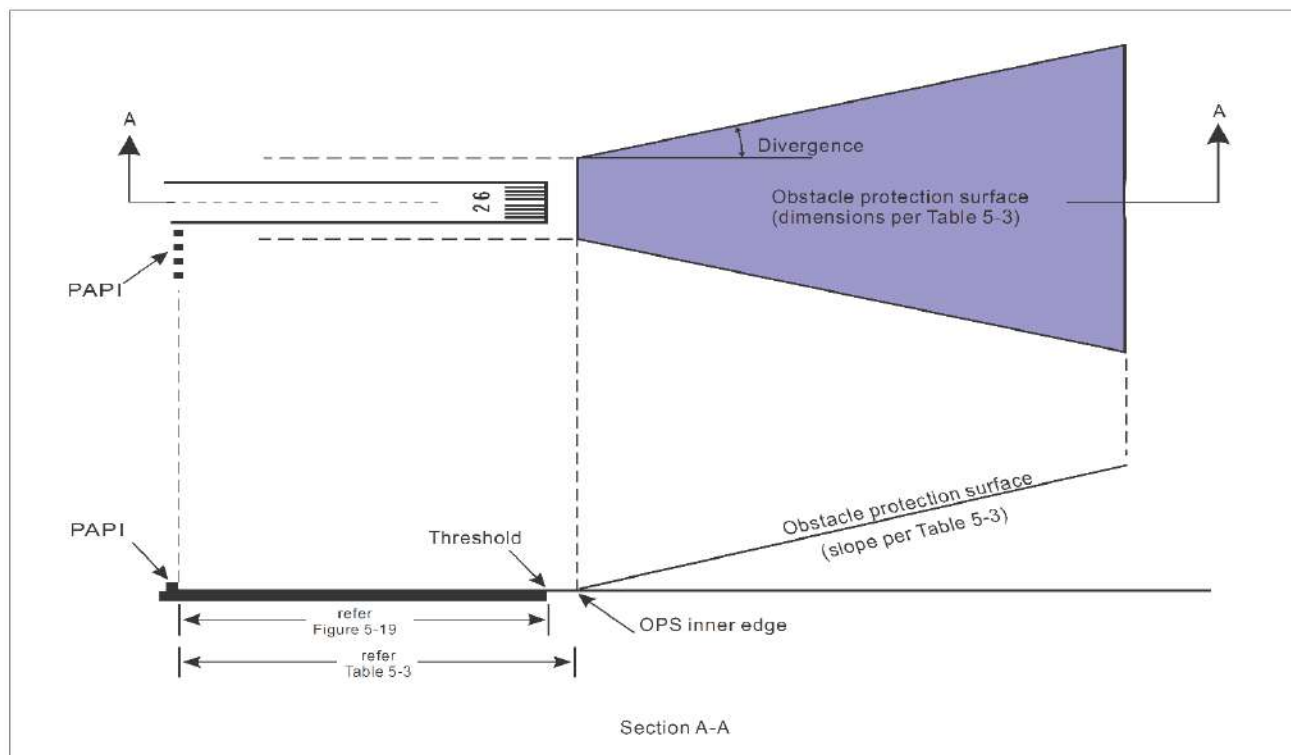

### 5.3.6 Circling guidance lights

#### Application

5.3.6.1 Circling guidance lights shall be provided when existing approach and runway lighting systems do not satisfactorily permit identification of the runway and/or approach area to a circling aircraft in the conditions for which it is intended the runway be used for circling approaches.

#### Location

5.3.6.2 The location and number of circling guidance lights shall be adequate to enable a pilot, as appropriate, to:

- a) Join the downwind leg or align and adjust the aircraft's track to the runway at a required distance from it and to distinguish the threshold in passing; and
- b) Keep in sight the runway threshold and/or other features which will make it possible to judge the turn on to base leg and final approach, taking into account the guidance provided by other visual aids.

5.3.6.3 Circling guidance lights shall consist of:

- a) lights indicating the extended centre line of the runway and/or parts of any approach lighting system; or
- b) lights indicating the position of the runway threshold; or
- c) lights indicating the direction or location of the runway;

Or a combination of such lights as is appropriate to the runway under consideration.

**Note:** *Guidance on installation of circling guidance lights is given in the Aerodrome Design Manual (Doc 9157), Part 4.*

#### Characteristics

5.3.6.4 Circling guidance lights shall be fixed or flashing lights of an intensity and beam spread adequate for the conditions of visibility and ambient light in which it is intended to make visual circling approaches. The flashing lights shall be white, and the steady lights either white or gaseous discharge lights.

5.3.6.5 The lights shall be designed and be installed in such a manner that they will not dazzle or confuse a pilot when approaching to land, taking off or taxiing.



### 5.3.7 Runway lead-in lighting systems

#### Application

5.3.7.1 A runway lead-in lighting system shall be provided where it is desired to provide visual guidance along a specific approach path, for reasons such as avoiding hazardous terrain or for purposes of noise abatement.

**Note:** Guidance on providing lead-in lighting systems is given in the Aerodrome Design Manual (Doc 9157), Part 4.

#### Location

5.3.7.2 A runway lead-in lighting system shall consist of groups of lights positioned so as to define the desired approach path and so that one group may be sighted from the preceding group. The interval between adjacent groups shall not exceed approximately 1 600 m.

**Note:** Runway lead-in lighting systems may be curved, straight or a combination thereof.

5.3.7.3 A runway lead-in lighting system shall extend from a point as approved by PACA, up to a point where the approach lighting system, if provided, or the runway or the runway lighting system is in view.

#### Characteristics

5.3.7.4 Each group of lights of a runway lead-in lighting system shall consist of at least three flashing lights in a linear or cluster configuration. The system may be augmented by steady burning lights where such lights would assist in identifying the system.

5.3.7.5 The flashing lights and steady burning lights shall be white.

5.3.7.6 Where practicable, the flashing lights in each group shall flash in sequence towards the runway.

### 5.3.8 Runway threshold identification lights

#### Application

5.3.8.1 Runway threshold identification lights shall be installed:

- a) At the threshold of a non-precision approach runway when additional threshold conspicuity is necessary or where it is not practicable to provide other approach lighting aids; and
- b) Where a runway threshold is permanently displaced from the runway extremity or temporarily displaced from the normal position and additional threshold conspicuity is necessary.

---

**Location**

5.3.8.2 Runway threshold identification lights shall be located symmetrically about the runway centre line, in line with the threshold and approximately 10 m outside each line of runway edge lights.

**Characteristics**

5.3.8.3 Runway threshold identification lights shall be flashing white lights with a flash frequency between 60 and 120 per minute.

5.3.8.4 The lights shall be visible only in the direction of approach to the runway.

**5.3.9 Runway edge lights****Application**

5.3.9.1 Runway edge lights shall be provided for a runway intended for use at night or for a precision approach runway intended for use by day or night.

5.3.9.2 Runway edge lights shall be provided on a runway intended for take-off with an operating minimum below an RVR of the order of 800 m by day.

**Location**

5.3.9.3 Runway edge lights shall be placed along the full length of the runway and shall be in two parallel rows equidistant from the centre line.

5.3.9.4 Runway edge lights shall be placed along the edges of the area declared for use as the runway or outside the edges of the area at a distance of not more than 3 m.

5.3.9.5 Where the width of the area which could be declared as runway exceeds 60 m, the distance between the rows of lights shall be determined taking into account the nature of the operations, the light distribution characteristics of the runway edge lights, and other visual aids serving the runway.

5.3.9.6 The lights shall be uniformly spaced in rows at intervals of not more than 60 m for an instrument runway, and at intervals of not more than 100 m for a non-instrument runway. The lights on opposite sides of the runway axis shall be on lines at right angles to that axis. At intersections of runways, lights may be spaced irregularly or omitted, provided that adequate guidance remains available to the pilot.

**Characteristics**

5.3.9.7 Runway edge lights shall be fixed lights showing variable white, except that:

- a) In the case of a displaced threshold, the lights between the beginning of the runway and the displaced threshold shall show red in the approach direction; and
- b) A section of the lights 600 m or one-third of the runway length, whichever is the less, at the remote end of the runway from the end at which the take-off run is started, may show yellow.

5.3.9.8 The runway edge lights shall show at all angles in azimuth necessary to provide guidance to a pilot landing or taking off in either direction. When the runway edge lights are intended to provide circling guidance, they shall show at all angles in azimuth (see 5.3.6.1).

5.3.9.9 In all angles of azimuth required in 5.3.9.8, runway edge lights shall show at angles up to 15° above the horizontal with an intensity adequate for the conditions of visibility and ambient light in which use of the runway for take-off or landing is intended. In any case, the intensity shall be at least 50 cd except that at an aerodrome without extraneous lighting, the intensity of the lights may be reduced to not less than 25 cd to avoid dazzling the pilot.

5.3.9.10 Runway edge lights on a precision approach runway shall be in accordance with the specifications of Appendix 2, Figure A2-9 or A2-10.

### **5.3.10 Runway threshold and wing bar lights (see Figure 5-22)**

#### **Application of runway threshold lights**

5.3.10.1 Runway threshold lights shall be provided for a runway equipped with runway edge lights, except on a non-instrument or non-precision approach runway where the threshold is displaced and wing bar lights are provided.

#### **Location of runway threshold lights**

5.3.10.2 When a threshold is at the extremity of a runway, the threshold lights shall be placed in a row at right angles to the runway axis as near to the extremity of the runway as possible and, in any case, not more than 3 m outside the extremity

5.3.10.3 When a threshold is displaced from the extremity of a runway, threshold lights shall be placed in a row at right angles to the runway axis at the displaced threshold.

5.3.10.4 Threshold lighting shall consist of:

- a) On a non-instrument or non-precision approach runway, at least six lights;
- b) On a precision approach runway category I, at least the number of lights that would
- c) Be required if the lights were uniformly spaced at intervals of 3 m between the rows of runway edge lights; and

- d) On a precision approach runway category II or III, lights uniformly spaced between the rows of runway edge lights at intervals of not more than 3 m.

5.3.10.5 The lights prescribed in 5.3.10.4 a) and b) shall be either:

- a) Equally spaced between the rows of runway edge lights; or
- b) Symmetrically disposed about the runway centre line in two groups, with the lights uniformly spaced in each group and with a gap between the groups equal to the gauge of the touchdown zone marking or lighting, where such is provided, or otherwise not more than half the distance between the rows of runway edge lights.

### **Application of wing bar lights**

5.3.10.6 Wing bar lights shall be provided on a precision approach runway when additional conspicuity is considered desirable.

5.3.10.7 Wing bar lights shall be provided on a non-instrument or non-precision approach runway where the threshold is displaced and runway threshold lights are required, but are not provided.

### **Location of wing bar lights**

5.3.10.8 Wing bar lights shall be symmetrically disposed about the runway centre line at the threshold in two groups, i.e. wing bars. Each wing bar shall be formed by at least five lights extending at least 10 m outward from, and at right angles to, the line of the runway edge lights, with the innermost light of each wing bar in the line of the runway edge lights.


### **Characteristics of runway threshold and wing bar lights**

5.3.10.9 Runway threshold and wing bar lights shall be fixed unidirectional lights showing green in the direction of approach to the runway. The intensity and beam spread of the lights shall be adequate for the conditions of visibility and ambient light in which use of the runway is intended.

5.3.10.10 Runway threshold lights on a precision approach runway shall be in accordance with the specifications of Appendix 2, Figure A2-3.

5.3.10.11 Threshold wing bar lights on a precision approach runway shall be in accordance with the specifications of Appendix 2, Figure A2-4.

Figure 5-22 Arrangement for runway threshold and runway end lights

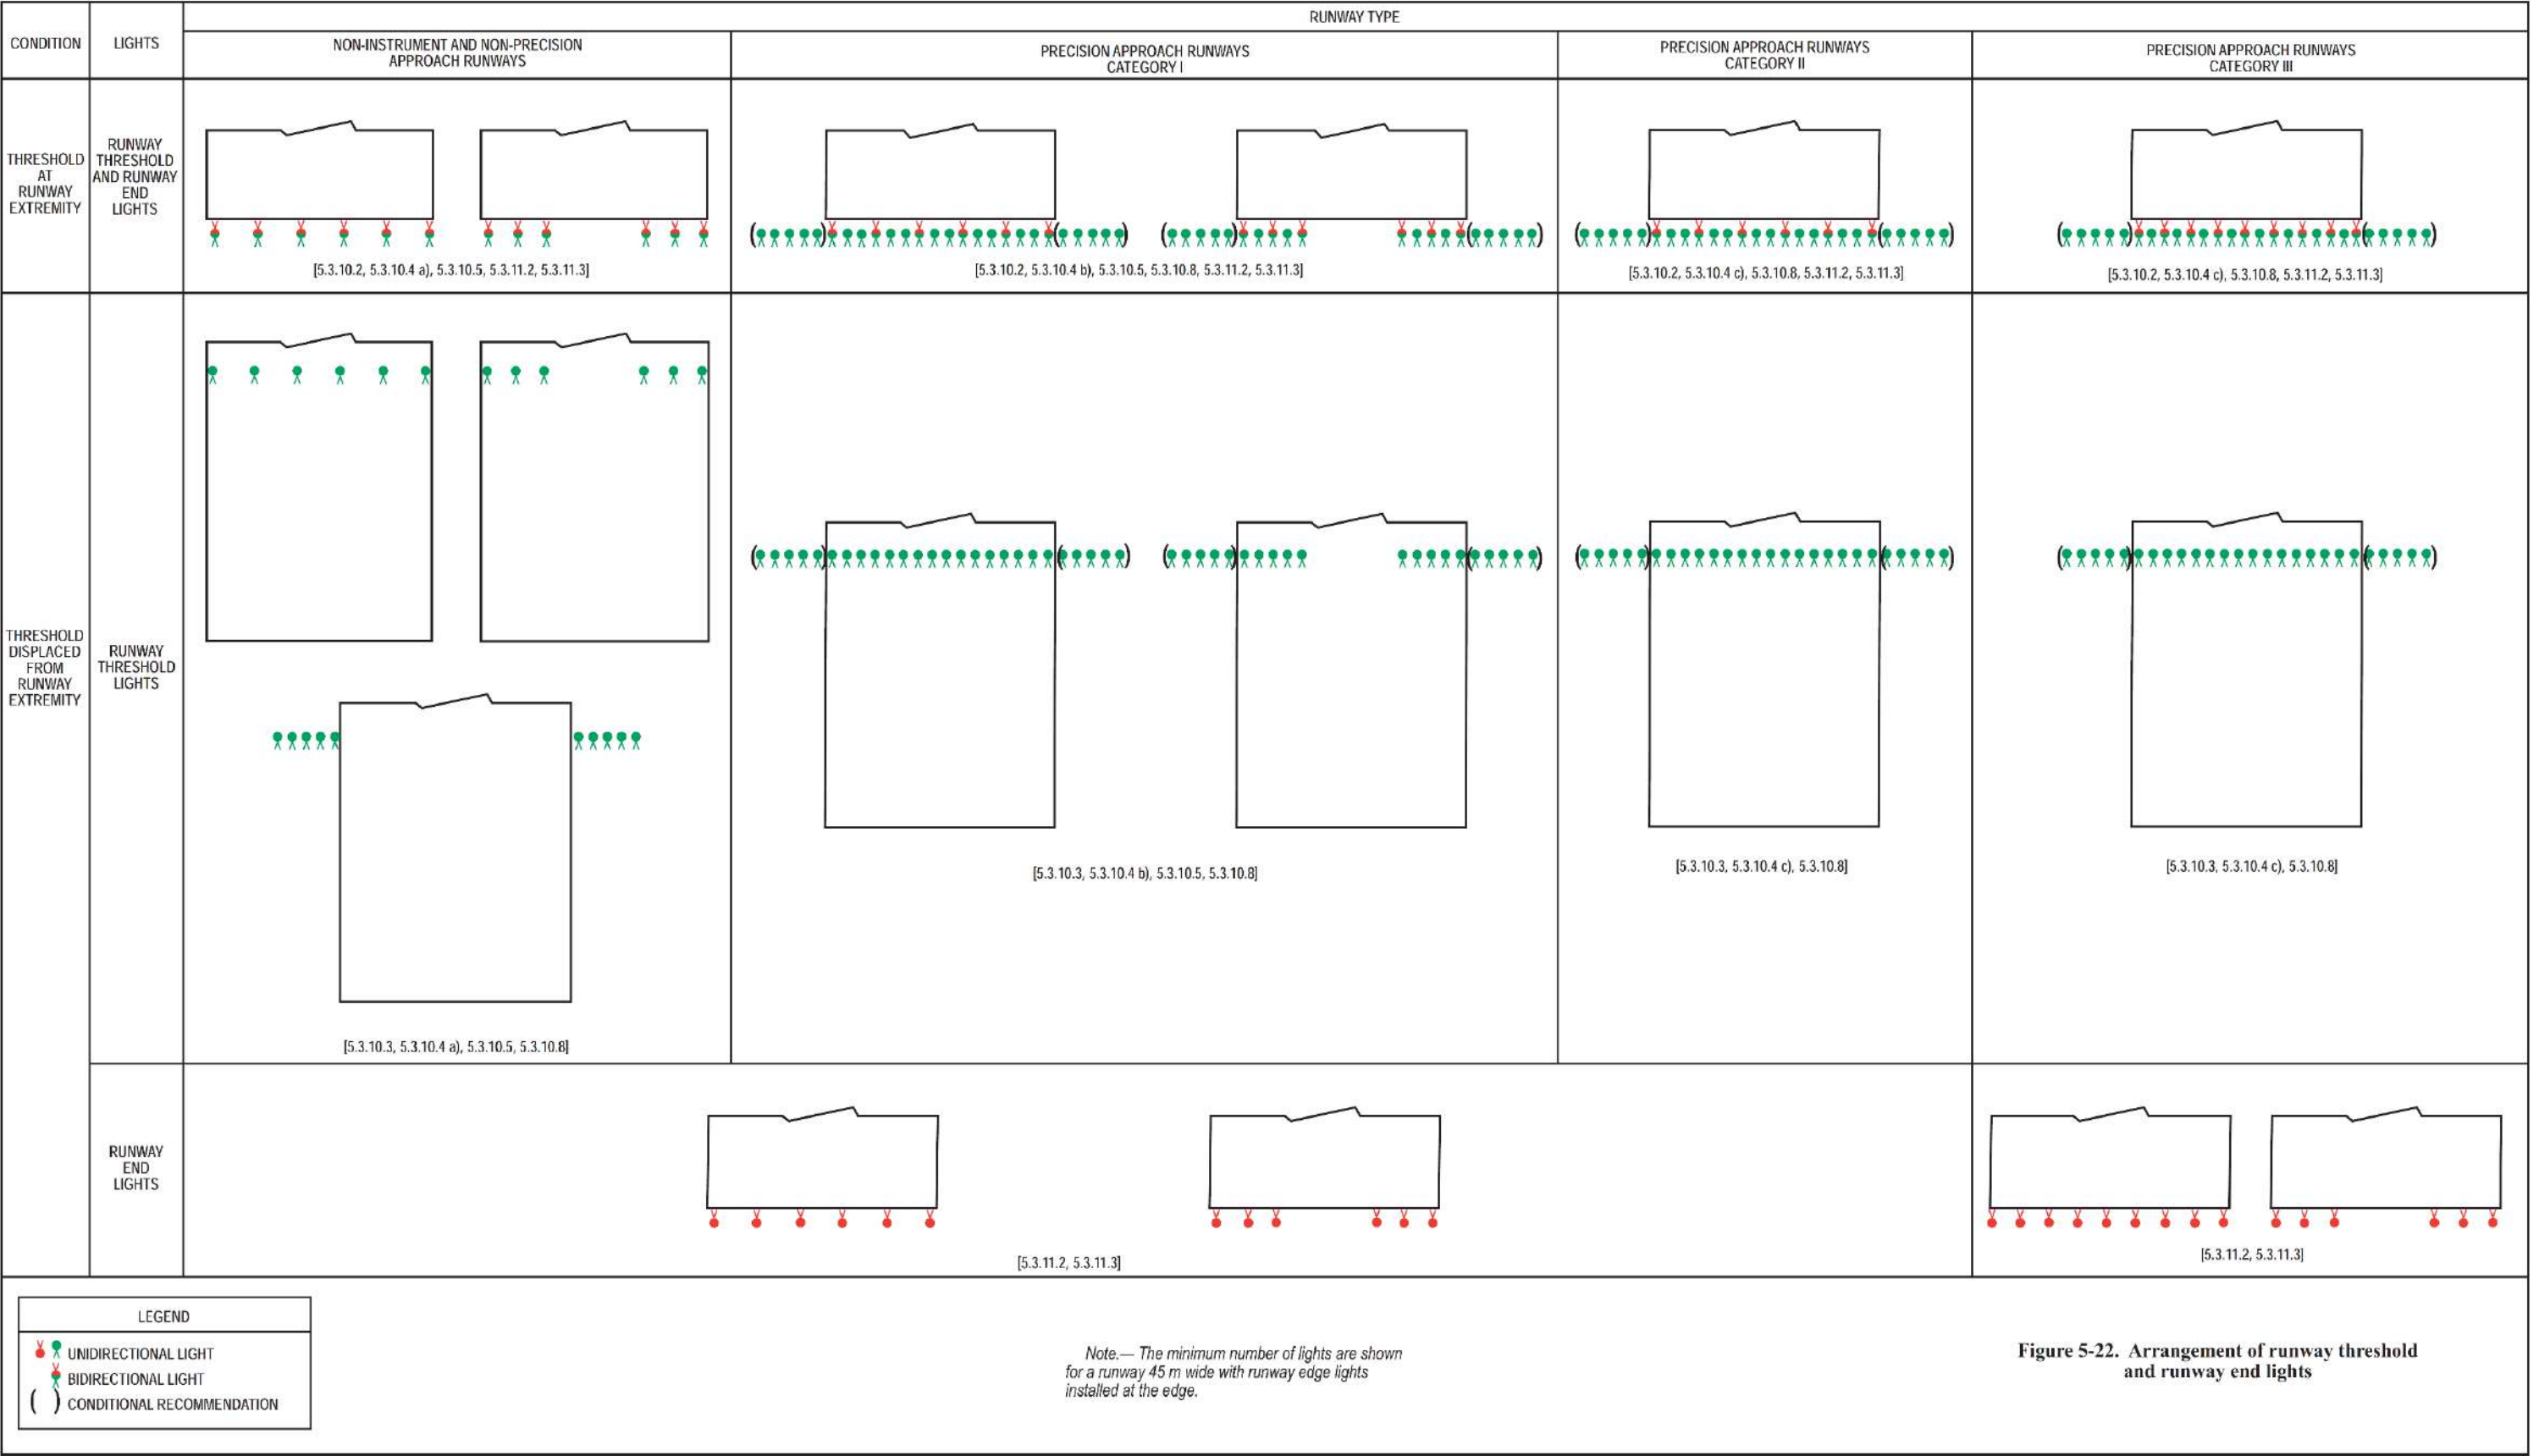

---

### 5.3.11 Runway end lights (see Figure 5-22)

#### Application

5.3.11.1 Runway end lights shall be provided for a runway equipped with runway edge lights.

***Note:** When the threshold is at the runway extremity, fittings serving as threshold lights may be used as runway end lights.*

#### Location

5.3.11.2 Runway end lights shall be placed on a line at right angles to the runway axis as near to the end of the runway as possible and, in any case, not more than 3 m outside the end.

5.3.11.3 Runway end lighting shall consist of at least six lights. The lights shall be either:

- a) Equally spaced between the rows of runway edge lights; or
- b) Symmetrically disposed about the runway centre line in two groups with the lights uniformly spaced in each group and with a gap between the groups of not more than half the distance between the rows of runway edge lights.

For a precision approach runway category III, the spacing between runway end lights, except between the two innermost lights if a gap is used, shall not exceed 6 m.

#### Characteristics

5.3.11.4 Runway end lights shall be fixed unidirectional lights showing red in the direction of the runway. The intensity and beam spread of the lights shall be adequate for the conditions of visibility and ambient light in which use of the runway is intended.

5.3.11.5 Runway end lights on a precision approach runway shall be in accordance with the specifications of Appendix 2, Figure A2-8.

### 5.3.12 Runway centre line lights

#### Application

5.3.12.1 Runway centre line lights shall be provided on a precision approach runway category II or III.

5.3.12.2 Runway centre line lights shall be provided on a precision approach runway category I, particularly when the runway is used by aircraft with high landing speeds or where the width between the runway edge lights is greater than 50 m.

5.3.12.3 Runway centre line lights shall be provided on a runway intended to be used for take-off with an operating minimum below an RVR of the order of 400 m.

5.3.12.4 Runway centre line lights shall be provided on a runway intended to be used for take-off with an operating minimum of an RVR of the order of 400 m or higher when used by aeroplanes with a very high take-off speed, particularly where the width between the runway edge lights is greater than 50 m.

### Location

5.3.12.5 Runway centre line lights shall be located along the centre line of the runway, except that the lights may be uniformly offset to the same side of the runway centre line by not more than 60 cm where it is not practicable to locate them along the centre line. The lights shall be located from the threshold to the end at longitudinal spacing of approximately 15 m. Where the serviceability level of the runway centre line lights specified as maintenance objectives in 10.5.6 or 10.5.10, as appropriate, can be demonstrated and the runway is intended for use in runway visual range conditions of 350 m or greater, the longitudinal spacing may be approximately 30 m.

**Note:** Existing centre line lighting where lights are spaced at 7.5 m need not be replaced.

5.3.12.6 Centre line guidance for take-off from the beginning of a runway to a displaced threshold shall be provided by:

- a) An approach lighting system if its characteristics and intensity settings afford the guidance required during take-off and it does not dazzle the pilot of an aircraft taking off; or
- b) Runway centre line lights; or
- c) Barrettes of at least 3 m in length and spaced at uniform intervals of 30 m, as shown in Figure 5-23, designed so that their photometric characteristics and intensity setting afford the guidance required during take-off without dazzling the pilot of an aircraft taking off.

Where necessary, provision shall be made to extinguish those centre line lights specified in b) or reset the intensity of the approach lighting system or barrettes when the runway is being used for landing. In no case shall only the single source runway centre line lights show from the beginning of the runway to a displaced threshold when the runway is being used for landing.


### Characteristics

5.3.12.7 Runway centre line lights shall be fixed lights showing variable white from the threshold to the point 900 m from the runway end; alternate red and variable white from 900 m to 300 m from the runway end; and red from 300 m to the runway end, except that for runways less than 1 800 m in length, the alternate red and variable white lights shall extend from the midpoint of the runway usable for landing to 300 m from the runway end.

**Note:** Care is required in the design of the electrical system to ensure that failure of part of the electrical system will not result in a false indication of the runway distance remaining.

5.3.12.8 Runway centre line lights shall be in accordance with the specifications of Appendix 2, Figure A2-6 or A2-7.



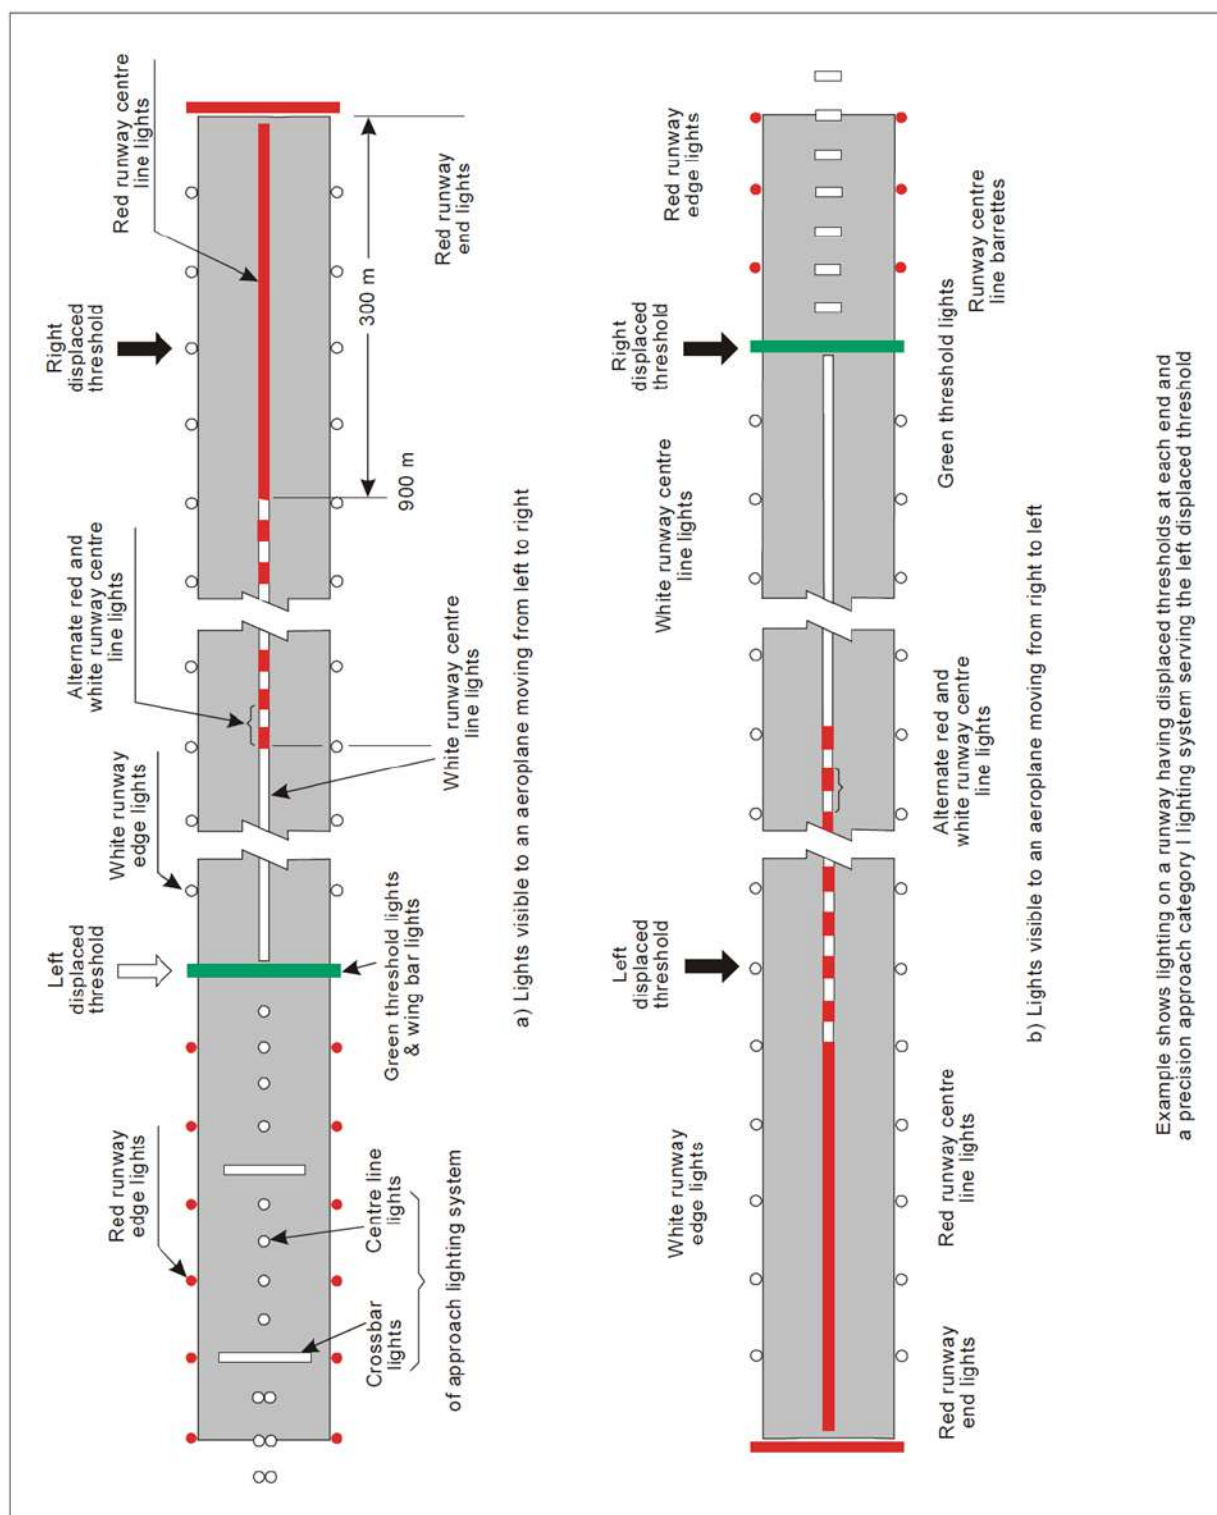

Example shows lighting on a runway having displaced thresholds at each end and a precision approach category I lighting system serving the left displaced threshold

**Figure 5-23. Example of Approach and Runway Lighting for Runway with displaced Thresholds**

### 5.3.13 Runway touchdown zone lights

#### Application

5.3.13.1 Touchdown zone lights shall be provided in the touchdown zone of a precision approach runway category II or III.

#### Location

5.3.13.2 Touchdown zone lights shall extend from the threshold for a longitudinal distance of 900 m, except that, on runways less than 1 800 m in length, the system shall be shortened so that it does not extend beyond the midpoint of the runway. The pattern shall be formed by pairs of barrettes symmetrically located about the runway centre line. The lateral spacing between the innermost lights of a pair of barrettes shall be equal to the lateral spacing selected for the touchdown zone marking. The longitudinal spacing between pairs of barrettes shall be either 30 m or 60 m.

**Note:** *To allow for operations at lower visibility minima, it may be advisable to use a 30 m longitudinal spacing between barrettes.*

#### Characteristics

5.3.13.3 A barrette shall be composed of at least three lights with a spacing between the lights of not more than 1.5 m.

5.3.13.4 A barrette shall be not less than 3 m nor more than 4.5 m in length.

5.3.13.5 Touchdown zone lights shall be fixed unidirectional lights showing variable white.

5.3.13.6 Touchdown zone lights shall be in accordance with the specifications of Appendix 2, Figure A2-5.

### 5.3.14 Simple touchdown zone lights

**Note:** *The purpose of simple touchdown zone lights is to provide pilots with enhanced situational awareness in all visibility conditions and to help enable pilots to decide whether to commence a go-around if the aircraft has not landed by a certain point on the runway. It is essential that pilots operating at aerodromes with simple touchdown zone lights be familiar with the purpose of these lights.*

## Application

5.3.14.1 Except where TDZ lights are provided in accordance with paragraph 5.3.13, at an aerodrome where the approach angle is greater than 3.5 degrees and/or the Landing Distance Available combined with other factors increases the risk of an overrun, simple touchdown zone lights shall be provided.

## Location

5.3.14.2 Simple touchdown zone lights shall be a pair of lights located on each side of the runway centreline 0.3 m beyond the upwind edge of the final touchdown zone marking. The lateral spacing between the inner lights of the two pairs of lights shall be equal to the lateral spacing selected for the touchdown zone marking. The spacing between the lights of the same pair shall not be more than 1.5 m or half the width of the touchdown zone marking, whichever is greater. (See Figure 5-24.)


5.3.14.3 Where provided on a runway without TDZ markings, simple touchdown zone lights shall be installed in such a position that provides the equivalent TDZ information.

## Characteristics

5.3.14.4 Simple touchdown zone lights shall be fixed unidirectional lights showing variable white, aligned so as to be visible to the pilot of a landing aeroplane in the direction of approach to the runway.

5.3.14.5 Simple touchdown zone lights shall be in accordance with the specifications in Appendix 2, Figure A2-5.

***Note:*** As a good operating practice, simple touchdown zone lights are supplied with power on a separate circuit to other runway lighting so that they may be used when other lighting is switched off.

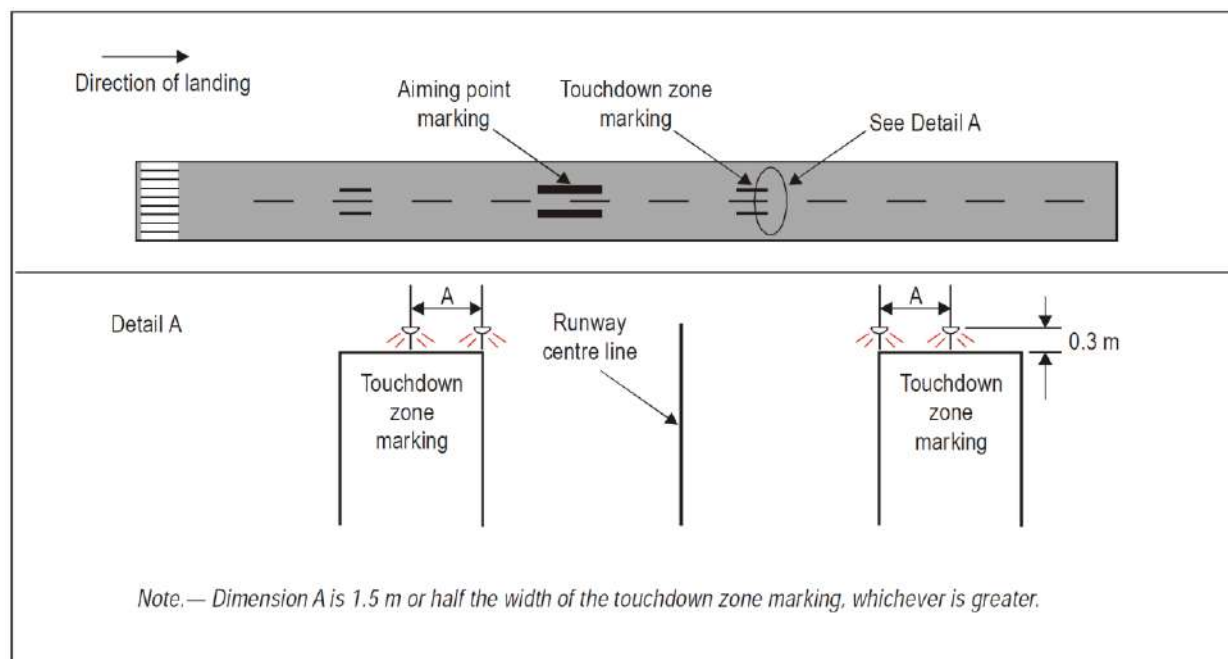

**Figure 5-24. Simple Touchdown Zone Lighting**

### 5.3.15 Rapid exit taxiway indicator lights

**Note:** The purpose of rapid exit taxiway indicator lights (RETILs) is to provide pilots with distance-to-go information to the nearest rapid exit taxiway on the runway, to enhance situational awareness in low visibility conditions and enable pilots to apply braking action for more efficient roll-out and runway exit speeds. It is essential that pilots operating at aerodromes with runway(s) displaying rapid exit taxiway indicator lights be familiar with the purpose of these lights.

#### Application

5.3.15.1 Rapid exit taxiway indicator lights shall be provided on a runway intended for use in runway visual range conditions less than a value of 350 m and/or where the traffic density is heavy.

**Note:** See Attachment A, Section 14.

5.3.15.2 Rapid exit taxiway indicator lights shall not be displayed in the event of any lamp failure or other failure that prevents the display of the light pattern depicted in Figure 5-25, in full.

## Location

5.3.15.3 A set of rapid exit taxiway indicator lights shall be located on the runway on the same side of the runway centre line as the associated rapid exit taxiway, in the configuration shown in Figure 5-25. In each set, the lights shall be located 2 m apart and the light nearest to the runway centre line shall be displaced 2 m from the runway centre line.


5.3.15.4 Where more than one rapid exit taxiway exists on a runway, the set of rapid exit taxiway indicator lights for each exit shall not overlap when displayed.

## Characteristics

5.3.15.5 Rapid exit taxiway indicator lights shall be fixed unidirectional yellow lights, aligned so as to be visible to the pilot of a landing aeroplane in the direction of approach to the runway.

5.3.15.6 Rapid exit taxiway indicator lights shall be in accordance with the specifications in Appendix 2, Figure A2-6 or Figure A2-7, as appropriate.

5.3.15.7 Rapid exit taxiway indicator lights shall be supplied with power on a separate circuit to other runway lighting so that they may be used when other lighting is switched off.

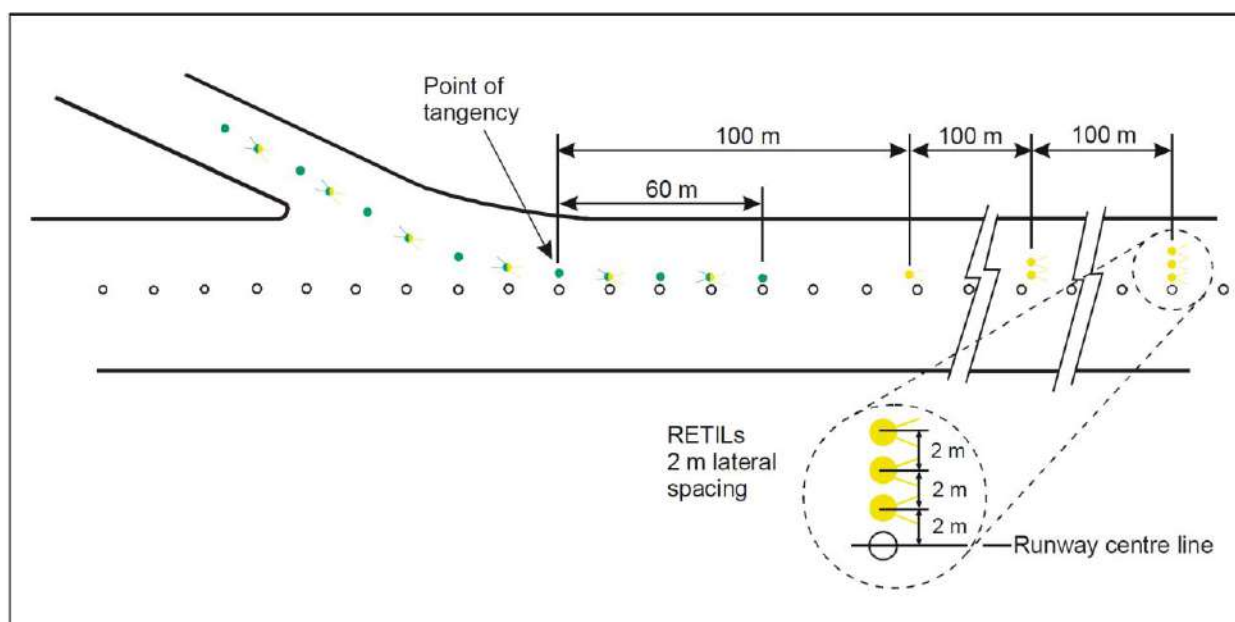

**Figure 5-25. Rapid Exit Taxiway Indicator Lights (RETILS)**

### 5.3.16 Stopway lights

#### Application

5.3.16.1 Stopway lights shall be provided for a stopway intended for use at night.

#### Location

5.3.16.2 Stopway lights shall be placed along the full length of the stopway and shall be in two parallel rows that are equidistant from the centre line and coincident with the rows of the runway edge lights. Stopway lights shall also be provided across the end of a stopway on a line at right angles to the stopway axis as near to the end of the stopway as possible and, in any case, not more than 3 m outside the end.

#### Characteristics

5.3.16.3 Stopway lights shall be fixed unidirectional lights showing red in the direction of the runway.

### 5.3.17 Taxiway centre line lights

#### Application

5.3.17.1 Taxiway centre line lights shall be provided on an exit taxiway, taxiway, and apron intended for use in runway visual range conditions less than a value of 350 m in such a manner as to provide continuous guidance between the runway centre line and aircraft stands, except that these lights need not be provided where the traffic density is light and taxiway edge lights and centre line marking provide adequate guidance.

5.3.17.2 Taxiway centre line lights shall be provided on a taxiway intended for use at night in runway visual range conditions of 350 m or greater, and particularly on complex taxiway intersections and exit taxiways, except that these lights need not be provided where the traffic density is light and taxiway edge lights and centre line marking provide adequate guidance.

**Note:** Where there may be a need to delineate the edges of a taxiway, e.g. on a rapid exit taxiway, narrow taxiway or in snow conditions, this may be done with taxiway edge lights or markers.

5.3.17.3 Taxiway centre line lights shall be provided on an exit taxiway, taxiway, and apron in all visibility conditions where specified as components of an advanced surface movement guidance and control system in such a manner as to provide continuous guidance between the runway centre line and aircraft stands.

5.3.17.4 Taxiway centre line lights shall be provided on a runway forming part of a standard taxi-route and intended for taxiing in runway visual range conditions less than a value of 350 m, except that these lights need not be provided where the traffic density is light and taxiway edge lights and centre line marking provide adequate guidance.

**Note:** See 8.2.3 for provisions concerning the interlocking of runway and taxiway lighting systems.

5.3.17.5 Taxiway centre line lights shall be provided in all visibility conditions on a runway forming part of a standard taxi-route where specified as components of an advanced surface movement guidance and control system.

### Characteristics

5.3.17.6 Except as provided for in 5.3.17.8, taxiway centre line lights on a taxiway other than an exit taxiway and on a runway forming part of a standard taxi-route shall be fixed lights showing green with beam dimensions such that the light is visible only from aeroplanes on or in the vicinity of the taxiway.

5.3.17.7 Taxiway centre line lights on an exit taxiway shall be fixed lights. Alternate taxiway centre line lights shall show green and yellow from their beginning near the runway centre line to the perimeter of the ILS/MLS critical/sensitive area or the lower edge of the inner transitional surface, whichever is farthest from the runway; and thereafter all lights shall show green (Figure 5-26). The first light in the exit centre line shall always show green, and the light nearest to the perimeter shall always show yellow.

**Note 1:** Care is necessary to limit the light distribution of green lights on or near a runway so as to avoid possible confusion with threshold lights.

**Note 2:** For yellow filter characteristics see Appendix 1, 2.2.

**Note 3:** The size of the ILS/MLS critical/sensitive area depends on the characteristics of the associated ILS/MLS and other factors. Guidance is provided in Annex 10, volume 1, Attachments C and G.

**Note 4:** See 5.4.3 for specifications on runway vacated signs.

5.3.17.8 Where it is necessary to denote the proximity to a runway, taxiway centre line lights shall be fixed lights showing alternating green and yellow from the perimeter of the ILS/MLS critical/sensitive area or the slower edge of the inner transitional surface, whichever is farthest from the runway, to the runway and continue alternating green and yellow until:

- a) Their end point near the runway centre line; or
- b) In the case of the taxiway centre line lights crossing the runway, to the opposite perimeter of the ILS/MLS critical/sensitive area or the lower edge of the inner transitional surface, whichever is farthest from the runway.

**Note 1:** Care is necessary to limit the light distribution of green lights on or near a runway so as to avoid possible confusion with threshold lights.

**Note 2:** The provisions of 5.3.17.8 can form part of effective runway incursion prevention measures.

5.3.17.9 Taxiway centreline lights shall be in accordance with the specifications of:

- a) Appendix 2, Figure A2-12, A2-13, or A2-14, for taxiways intended for use in runway visual range conditions of less than a value of 350 m; and
- b) Appendix 2, Figure A2-15 or A2-16, for other taxiways.

5.3.17.10 Where higher intensities are required, from an operational point of view, taxiway centreline lights on rapid exit taxiways intended for use in runway visual range conditions less than a value of 350 m shall be in accordance with the specifications of Appendix 2, Figure A2-12. The number of levels of brilliancy settings for these lights shall be the same as that for the runway centreline lights.

5.3.17.11 Where taxiway centreline lights are specified as components of an advanced surface movement guidance and control system and where, from an operational point of view,

**Note:** higher intensities are required to maintain ground movements at a certain speed in very low visibilities or in bright daytime conditions, taxiway centreline lights shall be in accordance with the specifications of Appendix 2, Figure A2-17, A2-18 or A2-19.

**Note:** High-intensity centreline lights shall only be used in case of an absolute necessity and following a specific study.

### Location

5.3.17.12 Taxiway centreline lights shall normally be located on the taxiway centreline marking, except that they may be offset by not more than 30 cm where it is not practicable to locate them on the marking.



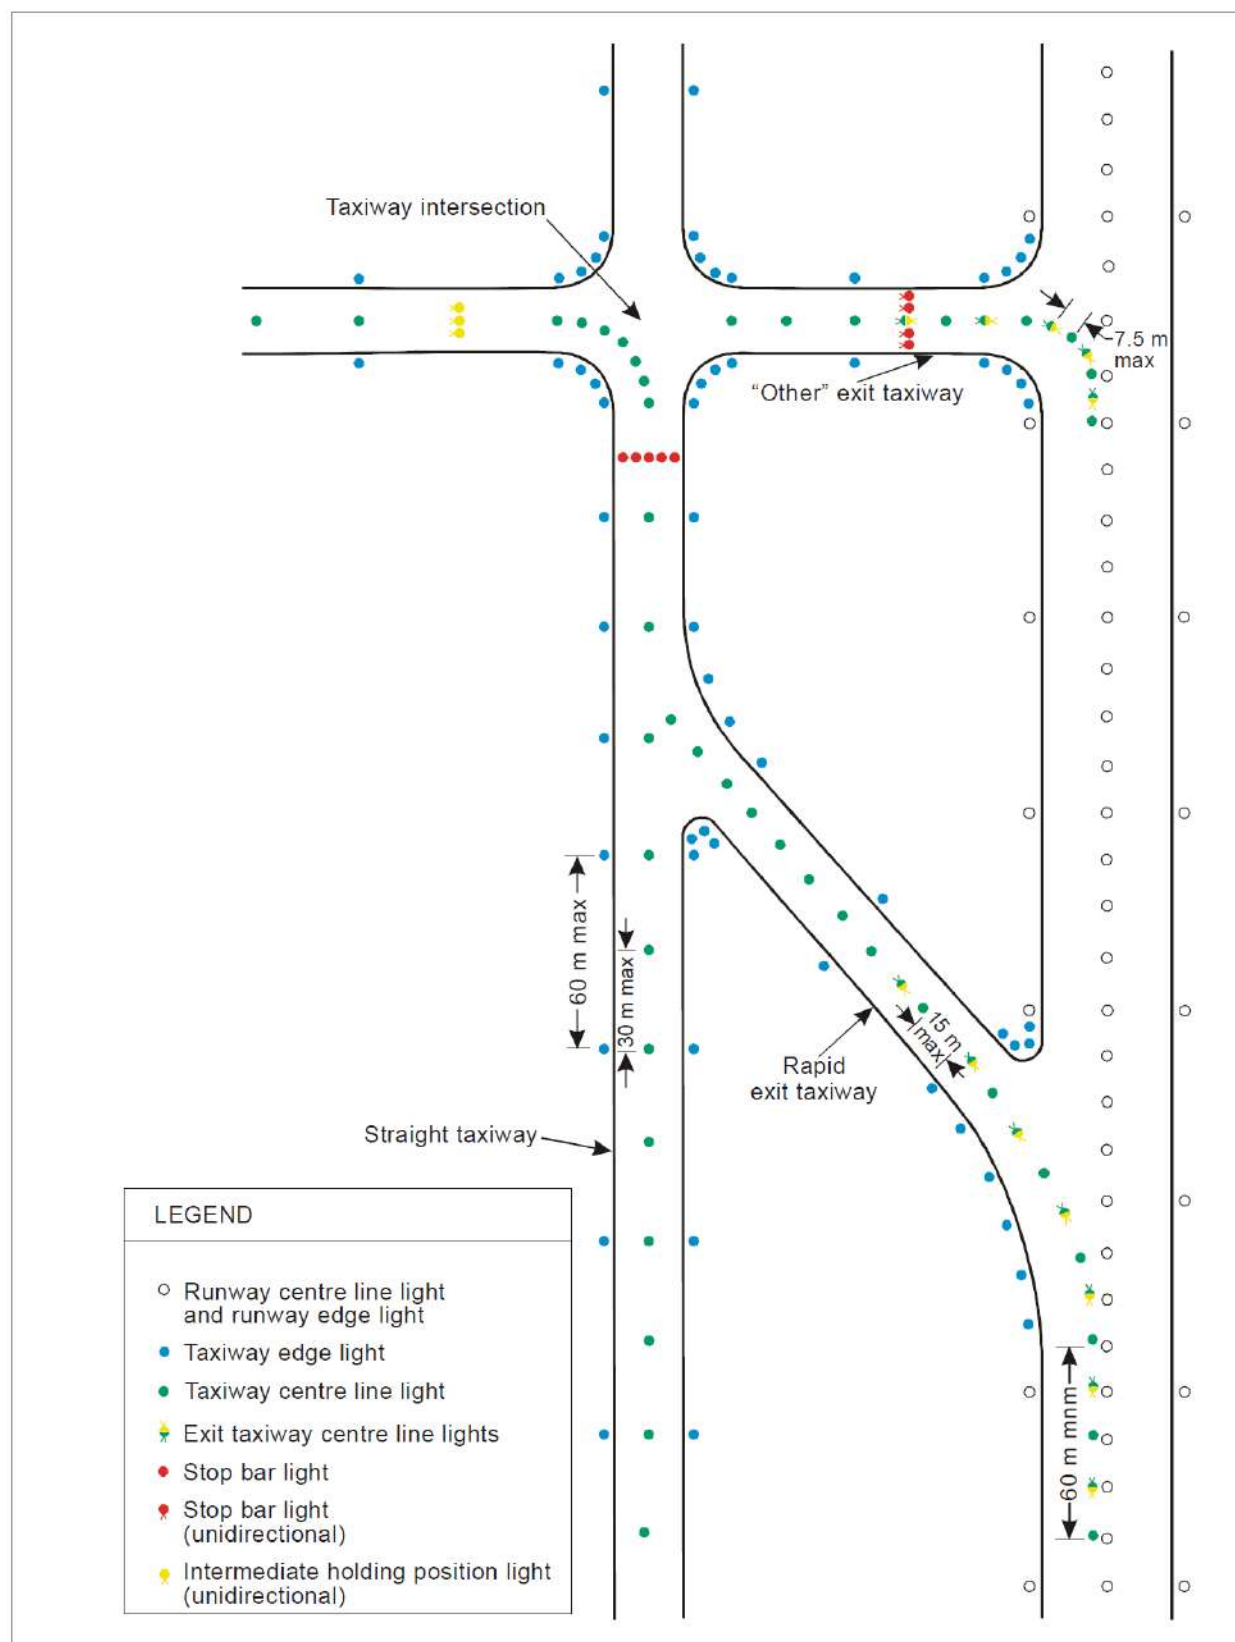


Figure 5-26. Taxiway Lighting

## Taxiway centreline lights on taxiways

### Location

5.3.17.13 Taxiway centreline lights on a straight section of a taxiway shall be spaced at longitudinal intervals of not more than 30 m, except that:

- a) Larger intervals not exceeding 60 m may be used where, because of the prevailing meteorological conditions, adequate guidance is provided by such spacing;
- b) Intervals less than 30 m shall be provided on short straight sections; and
- c) On a taxiway intended for use in RVR conditions of less than a value of 350 m, the longitudinal spacing shall not exceed 15 m.

5.3.17.14 Taxiway centreline lights on a taxiway curve shall continue from the straight portion of the taxiway at a constant distance from the outside edge of the taxiway curve. The lights shall be spaced at intervals such that a clear indication of the curve is provided.

5.3.17.15 On a taxiway intended for use in RVR conditions of less than a value of 350 m, the lights on a curve shall not exceed a spacing of 15 m, and on a curve of less than 400 m radius the lights shall be spaced at intervals of not greater than 7.5 m. This spacing shall extend for 60 m before and after the curve.

**Note 1:** *Spacings on curves that have been found suitable for a taxiway intended for use in RVR conditions of 350 m or greater are:*

Curve radius	Light spacing
up to 400 m	7.5 m
401 m to 899 m	15 m
900 m or greater	30 m.

**Note 2:** *See 3.9.6 and Figure 3-2.*

## Taxiway centre line lights on rapid exit taxiways

### Location

5.3.17.16 Taxiway centre line lights on a rapid exit taxiway shall commence at a point at least 60 m before the beginning of the taxiway centre line curve and continue beyond the end of the curve to a point on the centre line of the taxiway where an aeroplane can be expected to reach normal taxiing speed. The lights on that portion parallel to the runway centre line shall always be at least 60 cm from any row of runway centre line lights, as shown in Figure 5-27.

5.3.17.17 The lights shall be spaced at longitudinal intervals of not more than 15 m, except that, where runway centreline lights are not provided, a greater interval not exceeding 30 m may be used.

### Taxiway centreline lights on other exit taxiways

#### Location


5.3.17.18 Taxiway centreline lights on exit taxiways other than rapid exit taxiways shall commence at the point where the taxiway centreline marking begins to curve from the runway centreline, and follow the curved taxiway centreline marking at least to the point where the marking leaves the runway. The first light shall be at least 60 cm from any row of runway centreline lights, as shown in Figure 5-27.

5.3.17.19 The lights shall be spaced at longitudinal intervals of not more than 7.5 m.

### Taxiway centreline lights on runways

#### Location

5.3.17.20 Taxiway centreline lights on a runway forming part of a standard taxi-route and intended for taxiing in runway visual range conditions less than a value of 350 m shall be spaced at longitudinal intervals not exceeding 15 m.

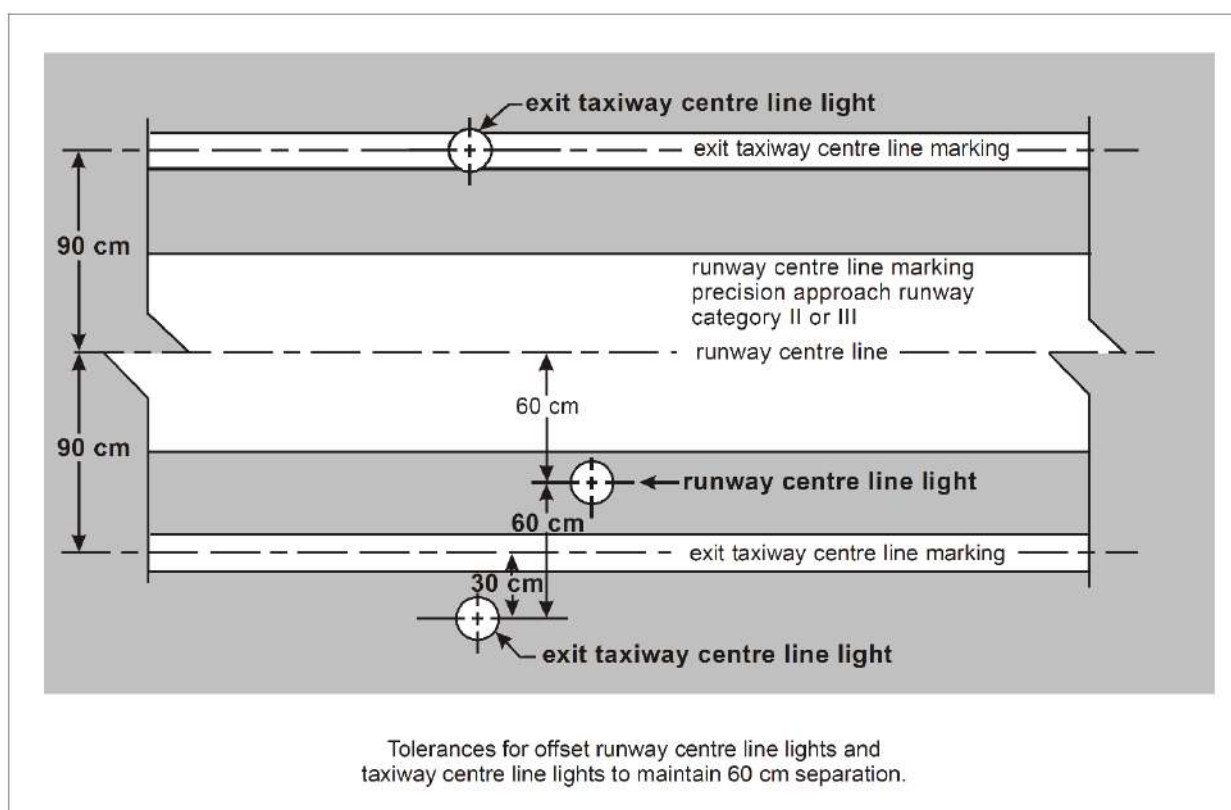

**Figure 5-27. Offset Runway and Taxiway CentreLine Lights**

### 5.3.18 Taxiway edge lights

#### Application

5.3.18.1 Taxiway edge lights shall be provided at the edges of a runway turn pad, holding bay, apron, etc., intended for use at night and on a taxiway not provided with taxiway centreline lights and intended for use at night, except that taxiway edge lights need not be provided where, considering the nature of the operations, adequate guidance can be achieved by surface illumination or other means.

**Note:** See 5.5.5 for taxiway edge markers.

5.3.18.2 Taxiway edge lights shall be provided on a runway forming part of a standard taxi-route and intended for taxiing at night where the runway is not provided with taxiway centreline lights.

**Note:** See 8.2.3 for provisions concerning the interlocking of runway and taxiway lighting systems.

#### Location

5.3.18.3 Taxiway edge lights on a straight section of a taxiway and on a runway forming part of a standard taxi-route shall be spaced at uniform longitudinal intervals of not more than 60 m. The lights on a curve shall be spaced at intervals less than 60 m so that a clear indication of the curve is provided.

**Note:** Guidance on the spacing of taxiway edge lights on curves is given in the Aerodrome Design Manual (Doc 9157), Part 4.

5.3.18.4 Taxiway edge lights on a holding bay, apron, etc., shall be spaced at uniform longitudinal intervals of not more than 60 m.

5.3.18.5 Taxiway edge lights on a runway turn pad shall be spaced at uniform longitudinal intervals of not more than 30 m.

5.3.18.6 The lights shall be located as near as practicable to the edges of the taxiway, runway turn pad, holding bay, apron or runway, etc., or outside the edges at a distance of not more than 3 m.

#### Characteristics

5.3.18.7 Taxiway edge lights shall be fixed lights showing blue. The lights shall show up to at least 75° above the horizontal and at all angles in azimuth necessary to provide guidance to a pilot taxiing in either direction. At an intersection, exit or curve the lights shall be shielded as far as practicable so that they cannot be seen in angles of azimuth in which they may be confused with other lights.

5.3.18.8 The intensity of taxiway edge lights shall be at least 2 cd from 0° to 6° vertical, and 0.2 cd at any vertical angles between 6° and 75°.

### 5.3.19 Runway turn pad lights

#### Application

5.3.19.1 Runway turn pad lights shall be provided for continuous guidance on a runway turn pad intended for use in runway visual range conditions less than a value of 350 m, to enable an aeroplane to complete a 180-degree turn and align with the runway centreline.

5.3.19.2 Runway turn pad lights shall be provided on a runway turn pad intended for use at night

#### Location

5.3.19.3 Runway turn pad lights shall normally be located on the runway turn pad marking, except that they may be offset by not more than 30 cm where it is not practicable to locate them on the marking.

5.3.19.4 Runway turn pad lights on a straight section of the runway turn pad marking shall be spaced at longitudinal intervals of not more than 15 m.

5.3.19.5 Runway turn pad lights on a curved section of the runway turn pad marking shall not exceed a spacing of 7.5 m.

#### Characteristics

5.3.19.6 Runway turn pad lights shall be unidirectional fixed lights showing green with beam dimensions such that the light is visible only from aeroplanes on or approaching the runway turn pad.

5.3.19.7 Runway turn pad lights shall be in accordance with the specifications of Appendix 2, Figure A2-13, A2-14 or A2-15, as appropriate.

### 5.3.20 Stop bars

#### Application

**Note 1:** A stop bar is intended to be controlled either manually or automatically by air traffic services.

**Note 2:** Runway incursions may take place in all visibility or weather conditions. The provision of stop bars at runway-holding positions and their use at night and in visibility conditions greater than 550 m runway visual range can form part of effective runway incursion prevention measures.

5.3.20.1 A stop bar shall be provided at every runway-holding position serving a runway when it is intended that the runway will be used in runway visual range conditions less than a value of 350 m, except where:

- a) Appropriate aids and procedures are available to assist in preventing inadvertent incursions of aircraft and vehicles onto the runway; or
- b) Operational procedures exist to limit, in runway visual range conditions less than a value of 550 m, the number of:
  - 1) Aircraft on the manoeuvring area to one at a time; and
  - 2) Vehicles on the manoeuvring area to the essential minimum.

5.3.20.2 A stop bar shall be provided at every runway-holding position serving a runway when it is intended that the runway will be used in runway visual range conditions of values between 350 m and 550 m, except where:

- a) Appropriate aids and procedures are available to assist in preventing inadvertent incursions of aircraft and vehicles onto the runway; or
- b) Operational procedures exist to limit, in runway visual range conditions less than a value of 550 m, the number of:
  - 1) Aircraft on the manoeuvring area to one at a time; and
  - 2) Vehicles on the manoeuvring area to the essential minimum.

5.3.20.3 Where there is more than one stop bar associated with a taxiway/runway intersection, only one shall be illuminated at any given time.

5.3.20.4 A stop bar shall be provided at an intermediate holding position when it is desired to supplement markings with lights and to provide traffic control by visual means.

**Note:** Where provided regardless of ILS category, The Stop bars leading to runway/s shall be illuminated.

### Location

5.3.20.5 Stop bars shall be located across the taxiway at the point where it is desired that traffic stop. Where the additional lights specified in 5.3.20.7 are provided, these lights shall be located not less than 3 m from the taxiway edge.

### Characteristics

5.3.20.6 Stop bars shall consist of lights spaced at intervals of 3 m across the taxiway, showing red in the intended direction(s) of approach to the intersection or runway-holding position.

**Note:** Where necessary to enhance conspicuity of an existing stop bar, extra lights are installed uniformly.

5.3.20.7 A pair of elevated lights shall be added to each end of the stop bar where the in-pavement stop bar lights might be obscured from a pilot's view, for example, by snow or rain, or

where a pilot may be required to stop the aircraft in a position so close to the lights that they are blocked from view by the structure of the aircraft.

5.3.20.8 Stop bars installed at a runway-holding position shall be unidirectional and shall show red in the direction of approach to the runway.

5.3.20.9 Where the additional lights specified in 5.3.20.7 are provided, these lights shall have the same characteristics as the lights in the stop bar, but shall be visible to approaching aircraft up to the stop bar position.

5.3.20.10 The intensity in red light and beam spreads of stop bar lights shall be in accordance with the specifications in Appendix 2, Figures A2-12 through A2-16, as appropriate.

5.3.20.11 Where stop bars are specified as components of an advanced surface movement guidance and control system and where, from an operational point of view, higher intensities are required to maintain ground movements at a certain speed in very low visibilities or in bright daytime conditions, it is recommended that the intensity in red light and beam spreads of stop bar lights shall be in accordance with the specifications of Appendix 2, Figure A2-17, A2-18 or A2-19.

**Note:** *High-intensity stop bars shall only be used in case of an absolute necessity and following a specific study.*

5.3.20.12 Where a wide beam fixture is required, it is recommended that the intensity in red light and beam spreads of stop bar lights shall be in accordance with the specifications of Appendix 2, Figure A2-17 or A2-19.

5.3.20.13 The lighting circuit shall be designed so that:

- a) stop bars located across entrance taxiways are selectively switchable;
- b) stop bars located across taxiways intended to be used only as exit taxiways are switchable selectively or in groups;
- c) when a stop bar is illuminated, any taxiway centreline lights installed beyond the stop bar shall be extinguished for a distance of at least 90 m; and
- d) stop bars shall be interlocked with the taxiway centreline lights so that when the centreline lights beyond the stop bar are illuminated the stop bar is extinguished and vice versa.

**Note:** *Care is required in the design of the electrical system to ensure that all of the lights of a stop bar will not fail at the same time. Guidance on this issue is given in the Aerodrome Design Manual (Doc 9157), Part 5.*

### 5.3.21 Intermediate holding position lights

**Note:** *See 5.2.11 for specifications on intermediate holding position marking.*

## Application

5.3.21.1 Except where a stop bar has been installed, intermediate holding position lights shall be provided at an intermediate holding position intended for use in runway visual range conditions less than a value of 350 m.

5.3.21.2 Intermediate holding position lights shall be provided at an intermediate holding position where there is no need for stop-and-go signals as provided by a stop bar.

## Location

5.3.21.3 Intermediate holding position lights shall be located along the intermediate holding position marking at a distance of 0.3 m prior to the marking.

## Characteristics

5.3.21.4 Intermediate holding position lights shall consist of three fixed unidirectional lights showing yellow in the direction of approach to the intermediate holding position with a light distribution similar to taxiway centreline lights if provided. The lights shall be disposed symmetrically about and at right angle to the taxiway centreline, with individual lights spaced 1.5 m apart.

### 5.3.22 De-icing/anti-icing facility exit lights: N/A

### 5.3.23 Runway guard lights

***Note:** The purpose of runway guard lights is to warn pilots, and drivers of vehicles when they are operating on taxiways, that they are about to enter an active runway. There are two standard configurations of runway guard lights as illustrated in Figure 5-29.*

## Application

5.3.23.1 Runway guard lights, Configuration A, shall be provided at each taxiway/runway intersection associated with a runway intended for use in:

- a) Runway visual range conditions less than a value of 550 m where a stop bar is not installed; and
- b) Runway visual range conditions of values between 550 m and 1 200 m where the traffic density is heavy.

5.3.23.2 As part of the Aerodrome Operators runway incursion prevention plan, runway guard lights, Configuration A or B, shall be provided at each taxiway/runway intersection where runway incursion hot spots have been identified, and used under all weather conditions during day and night.


5.3.23.3 Configuration B runway guard lights shall not be collocated with a stop bar.



## Location

5.3.23.4 Runway guard lights, Configuration A, shall be located at each side of the taxiway at a distance from the runway centre line not less than that specified for a take-off runway in Table 3-2.

5.3.23.5 Runway guard lights, Configuration B, shall be located across the taxiway at a distance from the runway centre line not less than that specified for a take-off runway in Table 3-2.

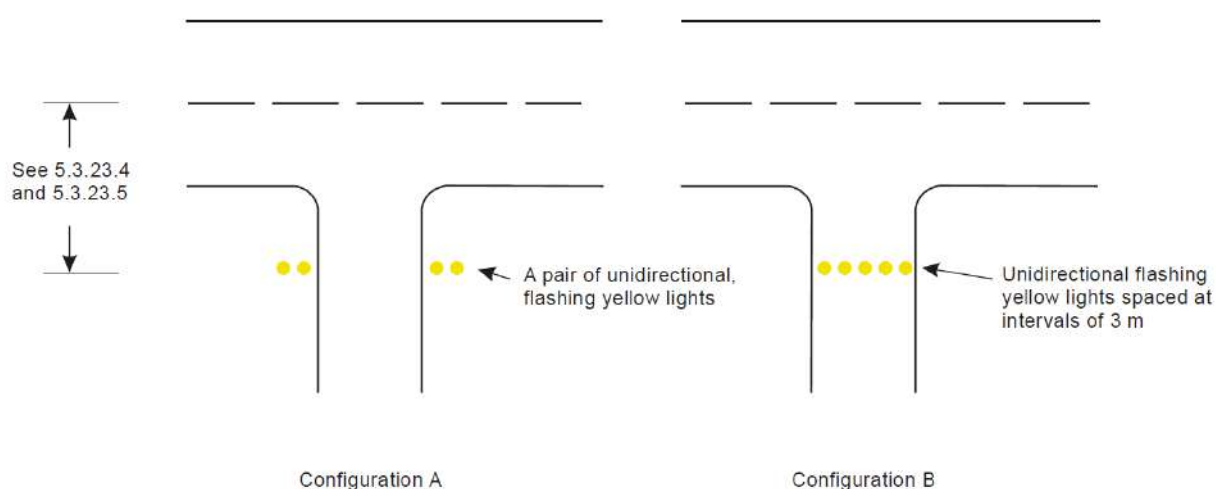

**Figure 5-29. Runway Guard Light**

## Characteristics

5.3.23.6 Runway guard lights, Configuration A, shall consist of two pairs of yellow lights.

5.3.23.7 Where there is a need to enhance the contrast between the on and off state of runway guard lights, Configuration A, intended for use during the day, a visor of sufficient size to prevent sunlight from entering the lens without interfering with the function of the fixture shall be located above each lamp.

**Note:** Some other device or design, e.g. specially designed optics, may be used in lieu of the visor.

5.3.23.8 Runway guard lights, Configuration B, shall consist of yellow lights spaced at intervals of 3 m across the taxiway.

5.3.23.9 The light beam shall be unidirectional and aligned so as to be visible to the pilot of an aeroplane taxiing to the holding position.

5.3.23.10 The intensity in yellow light and beam spreads of lights of Configuration A shall be in accordance with the specifications in Appendix 2, Figure A2-24.

5.3.23.11 Where runway guard lights are intended for use during the day it is that the intensity in yellow light and beam spreads of lights of Configuration A shall be in accordance with the specifications in Appendix 2, Figure A2-25.

5.3.23.12 Where runway guard lights are specified as components of an advanced surface movement guidance and control system where higher light intensities are required it is recommended that the intensity in yellow light and beam spreads of lights of Configuration A shall be in accordance with the specifications in Appendix 2, Figure A2-25.

**Note:** *Higher light intensities may be required to maintain ground movement at a certain speed in low visibility conditions.*

5.3.23.13 The intensity in yellow light and beam spreads of lights of Configuration B shall be in accordance with the specifications in Appendix 2, Figure A2-12.

5.3.23.14 Where runway guard lights are intended for use during the day, the intensity in yellow light and beam spreads of lights of Configuration B shall be in accordance with the specifications in Appendix 2, Figure A2-20.

5.3.23.15 Where runway guard lights are specified as components of an advanced surface movement guidance and control system where higher light intensities are required, the intensity in yellow light and beam spreads of lights of Configuration B shall be in accordance with the specifications in Appendix 2, Figure A2-20.

5.3.23.16 The lights in each unit of Configuration A shall be illuminated alternately.

5.3.23.17 For Configuration B, adjacent lights shall be alternately illuminated and alternative lights shall be illuminated in unison.

5.3.23.18 The lights shall be illuminated between 30 and 60 cycles per minute and the light suppression and illumination periods shall be equal and opposite in each light.

**Note:** *The optimum flash rate is dependent on the rise and fall times of the lamps used. Runway guard lights, Configuration A, installed on 6.6 ampere series circuits have been found to look best when operated at 45 to 50 flashes per minute per lamp. Runway guard lights, Configuration B, installed on 6.6 ampere series circuits have been found to look best when operated at 30 to 32 flashes per minute per lamp.*

### 5.3.24 Apron floodlighting (See also 5.3.17.1 and 5.3.18.1)

#### Application

5.3.24.1 Apron floodlighting shall be provided on an apron and on a designated isolated aircraft parking position intended to be used at night. If permanent flood lighting is not available at the isolated aircraft parking position, the aerodrome operators shall provide mobile floodlighting equipment unless otherwise exempted by PACA.

**Note 1:** *The designation of an isolated aircraft parking position is specified in 3.14.*

**Note 2:** *Guidance on apron floodlighting is given in the Aerodrome Design Manual (Doc 9157), Part 4.*

#### Location

5.3.24.2 Apron floodlights shall be located so as to provide adequate illumination on all apron service areas, with a minimum of glare to pilots of aircraft in flight and on the ground, aerodrome and apron controllers, and personnel on the apron. The arrangement and aiming of floodlights shall be such that an aircraft stand receives light from two or more directions to minimize shadows.

#### Characteristics

5.3.24.3 The spectral distribution of apron floodlights shall be such that the colours used for aircraft marking connected with routine servicing, and for surface and obstacle marking, can be correctly identified.

5.3.24.4 The average illuminance shall be at least the following:

Aircraft stand:

- Horizontal illuminance — 20 lux with a uniformity ratio (average to minimum) of not more than 4 to 1; and
- Vertical illuminance — 20 lux at a height of 2 m above the apron in relevant directions.

Other apron areas:

- Horizontal illuminance — 50 per cent of the average illuminance on the aircraft stands with a uniformity ratio (average to minimum) of not more than 4 to 1.

### 5.3.25 Visual docking guidance system

#### Application

5.3.25.1 A visual docking guidance system shall be provided when it is intended to indicate, by a visual aid, the precise positioning of an aircraft on an aircraft stand and other alternative means, such as marshallers, are not practicable.

**Note:** The factors to be considered in evaluating the need for a visual docking guidance system are in particular: the number and type(s) of aircraft using the aircraft stand, weather conditions, space available on the apron and the precision required for manoeuvring into the parking position due to aircraft servicing installation, passenger loading bridges, etc. See the Aerodrome Design Manual (Doc 9157), Part 4 — Visual Aids for guidance on the selection of suitable systems.

### Characteristics

5.3.25.2 The system shall provide both azimuth and stopping guidance.

5.3.25.3 The azimuth guidance unit and the stopping position indicator shall be adequate for use in all weather, visibility, background lighting and pavement conditions for which the system is intended, both by day and night, but shall not dazzle the pilot.

**Note:** Care is required in both the design and on-site installation of the system to ensure that reflection of sunlight, or other light in the vicinity, does not degrade the clarity and conspicuity of the visual cues provided by the system.

5.3.25.4 The azimuth guidance unit and the stopping position indicator shall be of a design such that:

- a) A clear indication of malfunction of either or both is available to the pilot; and
- b) They can be turned off.

5.3.25.5 The azimuth guidance unit and the stopping position indicator shall be located in such a way that there is continuity of guidance between the aircraft stand markings, the aircraft stand manoeuvring guidance lights, if present, and the visual docking guidance system.

5.3.25.6 The accuracy of the system shall be adequate for the type of loading bridge and fixed aircraft servicing installations with which it is to be used.

5.3.25.7 The system shall be usable by all types of aircraft for which the aircraft stand is intended, preferably without selective operation.

5.3.25.8 If selective operation is required to prepare the system for use by a particular type of aircraft, then the system shall provide an identification of the selected aircraft type to both the pilot and the system operator as a means of ensuring that the system has been set properly.

### Azimuth guidance unit

#### Location

5.3.25.9 The azimuth guidance unit shall be located on or close to the extension of the stand centre line ahead of the aircraft so that its signals are visible from the cockpit of an aircraft throughout the docking manoeuvre and aligned for use at least by the pilot occupying the left seat.

5.3.25.10 The azimuth guidance unit shall be aligned for use by the pilots occupying both the left and right seats.

### **Characteristics**

5.3.25.11 The azimuth guidance unit shall provide unambiguous left/right guidance which enables the pilot to acquire and maintain the lead-in line without over-controlling.

5.3.25.12 When azimuth guidance is indicated by colour change, green shall be used to identify the centre line and red for deviations from the centre line.

### **Stopping position indicator**

#### **Location**

5.3.25.13 The stopping position indicator shall be located in conjunction with, or sufficiently close to, the azimuth guidance unit so that a pilot can observe both the azimuth and stop signals without turning the head.

5.3.25.14 The stopping position indicator shall be usable at least by the pilot occupying the left seat.

5.3.25.15 The stopping position indicator shall be usable by the pilots occupying both the left and right seats.

### **Characteristics**

5.3.25.16 The stopping position information provided by the indicator for a particular aircraft type shall account for the anticipated range of variations in pilot eye height and/or viewing angle.

5.3.25.17 The stopping position indicator shall show the stopping position for the aircraft for which guidance is being provided and shall provide closing rate information to enable the pilot to gradually decelerate the aircraft to a full stop at the intended stopping position.

5.3.25.18 The stopping position indicator shall provide closing rate information over a distance of at least 10 m.

5.3.25.19 When stopping guidance is indicated by colour change, green shall be used to show that the aircraft can proceed and red to show that the stop point has been reached, except that for a short distance prior to the stop point a third colour may be used to warn that the stopping point is close.

### 5.3.26 Advanced visual docking guidance system

#### Application

**Note 1:** Advanced visual docking guidance systems (A-VDGS) include those systems that, in addition to basic and passive azimuth and stop position information, provide pilots with active (usually sensor-based) guidance information, such as aircraft type indication (in accordance with Doc 8643 — Aircraft Type Designators), distance-to-go information and closing speed. Docking guidance information is usually provided on a single display unit.

**Note 2:** An A-VDGS may provide docking guidance information in three stages: the acquisition of the aircraft by the system, the azimuth alignment of the aircraft, and the stopping position information.

5.3.26.1 An A-VDGS shall be provided where it is operationally desirable to confirm the correct aircraft type for which guidance is being provided and/or to indicate the stand centre line in use, where more than one is provided for.

5.3.26.2 The A-VDGS shall be suitable for use by all types of aircraft for which the aircraft stand is intended.

5.3.26.3 The A-VDGS shall be used only in conditions in which its operational performance is specified.

**Note 1:** The use of the A-VDGS in conditions such as weather, visibility and background lighting, both by day and night, would need to be specified.

**Note 2:** Care is required in both the design and on-site installation of the system to ensure that glare, reflection of sunlight, or other light in the vicinity, does not degrade the clarity and conspicuity of the visual cues provided by the system.

5.3.26.4 The docking guidance information provided by an A-VDGS shall not conflict with that provided by a conventional visual docking guidance system on an aircraft stand if both types are provided and are in operational use. A method of indicating that the A-VDGS is not in operational use or is unserviceable shall be provided.

#### Location

5.3.26.5 The A-VDGS shall be located such that unobstructed and unambiguous guidance is provided to the person responsible for, and persons assisting, the docking of the aircraft throughout the docking manoeuvre.

**Note:** Usually the pilot-in-command is responsible for the docking of the aircraft. However, in some circumstances, another person could be responsible and this person may be the driver of a vehicle that is towing the aircraft.

## Characteristics

5.3.26.6 The A-VDGS shall provide, at minimum, the following guidance information at the appropriate stage of the docking manoeuvre:

- a) An emergency stop indication;
- b) The aircraft type and model for which the guidance is provided;
- c) An indication of the lateral displacement of the aircraft relative to the stand centre line;
- d) The direction of azimuth correction needed to correct a displacement from the stand centre line;
- e) An indication of the distance to the stop position;
- f) An indication when the aircraft has reached the correct stopping position; and
- g) A warning indication if the aircraft goes beyond the appropriate stop position.

5.3.26.7 The A-VDGS shall be capable of providing docking guidance information for all aircraft taxi speeds encountered during the docking manoeuvre.

**Note:** See the Aerodrome Design Manual (Doc 9157), Part 4, for an indication of the maximum aircraft speeds relative to distance to the stopping position.

5.3.26.8 The time taken from the determination of the lateral displacement to its display shall not result in a deviation of the aircraft, when operated in normal conditions, from the stand centre line greater than 1 m.

5.3.26.9 The information on displacement of the aircraft relative to the stand centre line and distance to the stopping position, when displayed, shall be provided with the accuracy specified in Table 5-4.

5.3.26.10 Symbols and graphics used to depict guidance information shall be intuitively representative of the type of information provided.

**Note:** The use of colour would need to be appropriate and need to follow signal convention, i.e. red, yellow and green mean hazard, caution and normal/correct conditions, respectively. The effects of colour contrasts would also need to be considered.

5.3.26.11 Information on the lateral displacement of the aircraft relative to the stand centre line shall be provided at least 25 m prior to the stop position.

**Note:** The indication of the distance of the aircraft from the stop position may be colour-coded and presented at a rate and distance proportional to the actual closure rate and distance of the aircraft approaching the stop point.

5.3.26.12 Continuous closure distance and closure rate shall be provided from at least 15 m prior to the stop position.

**Table 5-4. A-VDGS recommended displacement accuracy**

Guidance information	Maximum deviation at stop position (stop area)	Maximum deviation at 9 m from stop position	Maximum deviation at 15 m from stop position	Maximum deviation at 25 m from stop position
Azimuth	±250 mm	±340 mm	±400 mm	±500 mm
Distance	±500 mm	±1 000 mm	±1 300 mm	Not specified

5.3.26.13 Where provided, closure distance displayed in numerals shall be provided in metre integers to the stop position and displayed to 1 decimal place at least 3 m prior to the stop position.

5.3.26.14 Throughout the docking manoeuvre, an appropriate means shall be provided on the A-VDGS to indicate the need to bring the aircraft to an immediate halt. In such an event, which includes a failure of the A-VDGS, no other information shall be displayed.

5.3.26.15 Provision to initiate an immediate halt to the docking procedure shall be made available to personnel responsible for the operational safety of the stand.

5.3.26.16 The word “stop” in red characters shall be displayed when an immediate cessation of the docking manoeuvre is required.

### **5.3.27 Aircraft stand manoeuvring guidance lights**

#### **Application**

5.3.27.1 Aircraft stand manoeuvring guidance lights shall be provided to facilitate the positioning of an aircraft on an aircraft stand on a paved apron facility intended for use in poor visibility conditions, unless adequate guidance is provided by other means.

#### **Location**

5.3.27.2 Aircraft stand manoeuvring guidance lights shall be collocated with the aircraft stand markings.



## Characteristics

5.3.27.3 Aircraft stand maneuvering guidance lights, other than those indicating a stop position, shall be fixed yellow lights, visible throughout the segments within which they are intended to provide guidance.

5.3.27.4 The lights used to delineate lead-in, turning and lead-out lines shall be spaced at intervals of not more than 7.5 m on curves and 15 m on straight sections.

5.3.27.5 The lights indicating a stop position shall be fixed unidirectional lights showing red.

5.3.27.6 The intensity of the lights shall be adequate for the condition of visibility and ambient light in which the use of the aircraft stand is intended.

5.3.27.7 The lighting circuit shall be designed so that the lights may be switched on to indicate that an aircraft stand is to be used and switched off to indicate that it is not to be used.

## 5.3.28 Road-holding position light

### Application

5.3.28.1 A road-holding position light shall be provided at each road-holding position serving a runway when it is intended that the runway will be used in runway visual range conditions less than a value of 350 m.

5.3.28.2 A road-holding position light shall be provided at each road-holding position serving a runway when it is intended that the runway will be used in runway visual range conditions of values between 350 m and 550 m.

### Location

5.3.28.3 A road-holding position light shall be located adjacent to the holding position marking 1.5 m ( $\pm 0.5$  m) from one edge of the road, i.e. left or right as appropriate to the local traffic regulations.(refer 5.4.7)

**Note:** See 9.9 for the mass and height limitations and frangibility requirements of navigation aids located on runway strips.

## Characteristics

5.3.28.4 The road-holding position light shall comprise:

- a) A controllable red (stop)/green (go) traffic light; or
- b) A flashing-red light.

**Note:** It is intended that the lights specified in sub-paragraph a) be controlled by the air traffic services.

5.3.28.5 The road-holding position light beam shall be unidirectional and aligned so as to be visible to the driver of a vehicle approaching the holding position.

5.3.28.6 The intensity of the light beam shall be adequate for the conditions of visibility and ambient light in which the use of the holding position is intended, but shall not dazzle the driver.

**Note:** The commonly used traffic lights are likely to meet the requirements in 5.3.28.5 and 5.3.28.6.

5.3.28.7 The flash frequency of the flashing-red light shall be between 30 and 60 flashes per minute.

### 5.3.29 No-entry bar

**Note 1:** A no-entry bar is intended to be controlled manually by air traffic services.

**Note 2:** Runway incursions may take place in all visibility or weather conditions. The provision of no-entry bars at taxiway/runway intersections and their use at night and in all visibility conditions can form part of effective runway incursion prevention measures.

#### Application

5.3.29.1 A no-entry bar shall be provided across a taxiway which is intended to be used as an exit only taxiway to assist in preventing inadvertent access of traffic to that taxiway.

#### Location

5.3.29.2 A no-entry bar shall be located across the taxiway at the end of an exit only taxiway where it is desired to prevent traffic from entering the taxiway in the wrong direction.

#### Characteristics

5.3.29.3 A no-entry bar shall consist of unidirectional lights spaced at uniform intervals of no more than 3 m showing red in the intended direction(s) of approach to the runway.

**Note:** Where necessary to enhance conspicuity, extra lights are installed uniformly.

5.3.29.4 A pair of elevated lights shall be added to each end of the no-entry bar where the in-pavement no entry bar lights might be obscured from a pilot's view, for example, by rain, where a pilot may be required to stop the aircraft in a position so close to the lights that they are blocked from view by the structure of the aircraft.

5.3.29.5 The intensity in red light and beam spreads of no-entry bar lights shall be in accordance with the specifications in Appendix 2, Figures A2-12 through A2-16, as appropriate.

5.3.29.6 Where no-entry bars are specified as components of an advanced surface movement guidance and control system and where, from an operational point of view, higher intensities are required to maintain ground movements at a certain speed in very low visibilities or in bright daytime conditions, the intensity in red light and beam spreads of no-entry bar lights shall be in accordance with the specifications of Appendix 2, Figure A2-17, A2-18 or A2-19.

**Note:** *High-intensity no-entry bars are typically used only in case of an absolute necessity and following a specific study.*

5.3.29.7 Where a wide beam fixture is required, the intensity in red light and beam spreads of no-entry bar lights shall be in accordance with the specifications of Appendix 2, Figure A2-17 or A2-19.

5.3.29.8 The lighting circuit shall be designed so that:

- a) No-entry bars are switchable selectively or in groups;
- b) When a no-entry bar is illuminated, any taxiway centre line lights installed beyond the no-entry bar, when viewed towards the runway, shall be extinguished for a distance of at least 90 m; and
- c) When a no-entry bar is illuminated, any stop bar installed between the no-entry bar and the runway shall be extinguished

### 5.3.30 Runway status lights

*Introductory Note — Runway status lights (RWSL) is a type of autonomous runway incursion warning system (ARIWS). The two basic visual components of RWSL are runway entrance lights (RELs) and take-off hold lights (THLs). Either may be installed by itself, but the two components are designed to be complementary to each other.*

#### Location

5.3.30.1 Where provided, RELs shall be offset 0.6 m from the taxiway centre line on the opposite side to the taxiway centre line lights and begin 0.6 m before the runway-holding position extending to the edge of the runway. An additional single light shall be placed on the runway 0.6 m from the runway centre line and aligned with the last two taxiway RELs.

**Note:** *Where two or more runway-holding positions are provided, the runway-holding position referred is that closest to the runway.*

5.3.30.2 RELs shall consist of at least five light units and shall be spaced at a minimum of 3.8 m and a maximum of 15.2 m longitudinally, depending upon the taxiway length involved, except for a single light installed near the runway centre line.

5.3.30.3 Where provided, THLs shall be offset 1.8 m on each side of the runway centre line lights and extend, in pairs, starting at a point 115 m from the beginning of the runway and, thereafter, every 30 m for at least 450 m.

**Note:** *Additional THLs may be similarly provided at the starting point of the take-off roll.*

### Characteristics

5.3.30.4 Where provided, RELs shall consist of a single line of fixed in pavement lights showing red in the direction of aircraft approaching the runway.

5.3.30.5 RELs shall illuminate as an array at each taxiway/runway intersection where they are installed less than 2 seconds after the system determines a warning is needed.

5.3.30.6 Intensity and beam spread of RELs shall be in accordance with the specifications of Appendix 2, Figures A2-12 and A2-14.

**Note:** *Consideration for reduced beam width may be required for some REL lights at acute angled runway/taxiway intersections to ensure the RELs are not visible to aircraft on the runway.*

5.3.30.7 Where provided, THLs shall consist of two rows of fixed in pavement lights showing red facing the aircraft taking off.

5.3.30.8 THLs shall illuminate as an array on the runway less than 2 seconds after the system determines a warning is needed.

5.3.30.9 Intensity and beam spread of THLs shall be in accordance with the specifications of Appendix 2, Figure A2-x.

5.3.30.10 RELs and THLs should be automated to the extent that the only control over each system will be to disable one or both systems.

## 5.4 Signs

### 5.4.1 General

**Note:** *Signs shall be either fixed message signs or variable message signs. Guidance on signs is contained in the Aerodrome Design Manual (Doc 9157), Part 4.*

### Application

5.4.1.1 Signs shall be provided to convey a mandatory instruction, information on a specific location or destination on a movement area or to provide other information to meet the requirements of 9.8.1.

**Note:** *See 5.2.17 for specifications on information marking.*

5.4.1.2 A variable message sign shall be provided where:

- d) The instruction or information displayed on the sign is relevant only during a certain period of time; and/or
- e) There is a need for variable predetermined information to be displayed on the sign to meet the requirements of 9.8.1.

### Characteristics

5.4.1.3 Signs shall be frangible. Those located near a runway or taxiway shall be sufficiently low to preserve clearance for propellers and the engine pods of jet aircraft. The installed height of the sign shall not exceed the dimension shown in the appropriate column of Table 5-5.

5.4.1.4 Signs shall be rectangular, as shown in Figures 5-30 and 5-31 with the longer side horizontal.

5.4.1.5 The only signs on the movement area utilizing red shall be mandatory instruction signs.

5.4.1.6 The inscriptions on a sign shall be in accordance with the provisions of Appendix 4.

Code number	Legend	Sign height (mm)		Perpendicular distance from defined taxiway pavement edge to near side of sign	Perpendicular distance from defined runway pavement edge to near side of sign
		Face (min.)	Installed (max.)		
1 or 2	200	400	700	5–11 m	3–10 m
1 or 2	300	600	900	5–11 m	3–10 m
3 or 4	300	600	900	11–21 m	8–15 m
3 or 4	400	800	1 100	11–21 m	8–15 m

5.4.1.7 Signs shall be illuminated in accordance with the provisions of Appendix 4 when intended for use:

- a) In runway visual range conditions less than a value of 800 m; or
- b) At night in association with instrument runways; or










- c) At night in association with non-instrument runways where the code number is 3 or 4.

5.4.1.8 Signs shall be retroreflective and/or illuminated in accordance with the provisions of Appendix 4 when intended for use at night in association with non-instrument runways where the code number is 1 or 2.

5.4.1.9 A variable message sign shall show a blank face when not in use.

5.4.1.10 In case of failure, a variable message sign shall not provide information that could lead to unsafe action from a pilot or a vehicle driver.

5.4.1.11 The time interval to change from one message to another on a variable message sign shall be as short as practicable and shall not exceed 5 seconds.

Runway designation of a runway extremity (Example)		Indicates a runway-holding position at a runway extremity
Runway designation of both extremities of a runway (Example)		Indicates a runway-holding position located at taxiway/runway intersection other than runway extremity
Category I hold position (Example)		Indicates a category I runway-holding position at the threshold of runway 25
Category II hold position (Example)		Indicates a category II runway-holding position at the threshold of runway 25
Category III hold position (Example)		Indicates a category III runway-holding position at the threshold of runway 25
Category II and III hold position (Example)		Indicates a joint category II and III runway-holding position at the threshold of runway 25
Category I, II and III hold position (Example)		Indicates a joint category I, II and III runway-holding position at the threshold of runway 25
NO ENTRY		Indicates that entry to an area is prohibited
Runway-holding position (Example)		Indicates a runway-holding position (in accordance with 3.12.3)

**Figure 5-30. Mandatory instruction signs**

## 5.4.2 Mandatory instruction signs

**Note:** See Figure 5-30 for pictorial representation of mandatory instruction signs and Figure 5-32 for examples of locating signs at taxiway/runway intersections.

### Application

5.4.2.1 A mandatory instruction sign shall be provided to identify a location beyond which an aircraft taxiing or vehicle shall not proceed unless authorized by the aerodrome control tower.

5.4.2.2 Mandatory instruction signs shall include runway designation signs, category I, II or III holding position signs, runway-holding position signs, road-holding position signs and NO ENTRY signs.

**Note:** See 5.4.7 for specifications on road-holding position signs.

5.4.2.3 A pattern “A” runway-holding position marking shall be supplemented at a taxiway/runway intersection or a runway/runway intersection with a runway designation sign.

5.4.2.4 A pattern “B” runway-holding position marking shall be supplemented with a category I, II or III holding position sign.

5.4.2.5 A pattern “A” runway-holding position marking at a runway-holding position established in accordance with 3.12.3 shall be supplemented with a runway-holding position sign.

**Note:** See 5.2.10 for specifications on runway-holding position marking.

5.4.2.6 A runway designation sign at a taxiway/runway intersection shall be supplemented with a location sign in the outboard (farthest from the taxiway) position, as appropriate.

**Note:** See 5.4.3 for characteristics of location signs.

5.4.2.7 A NO ENTRY sign shall be provided when entry into an area is prohibit

### Location

5.4.2.8 A runway designation sign at a taxiway/runway intersection or a runway/runway intersection shall be located on each side of the runway-holding position marking facing the direction of approach to the runway.

5.4.2.9 A category I, II or III holding position sign shall be located on each side of the runway-holding position marking facing the direction of the approach to the critical area.

5.4.2.10 A NO ENTRY sign shall be located at the beginning of the area to which entrance is prohibited on each side of the taxiway as viewed by the pilot.

5.4.2.11 A runway-holding position sign shall be located on each side of the runway-holding position established in accordance with 3.12.3, facing the approach to the obstacle limitation surface or ILS/MLS critical/sensitive area, as appropriate.





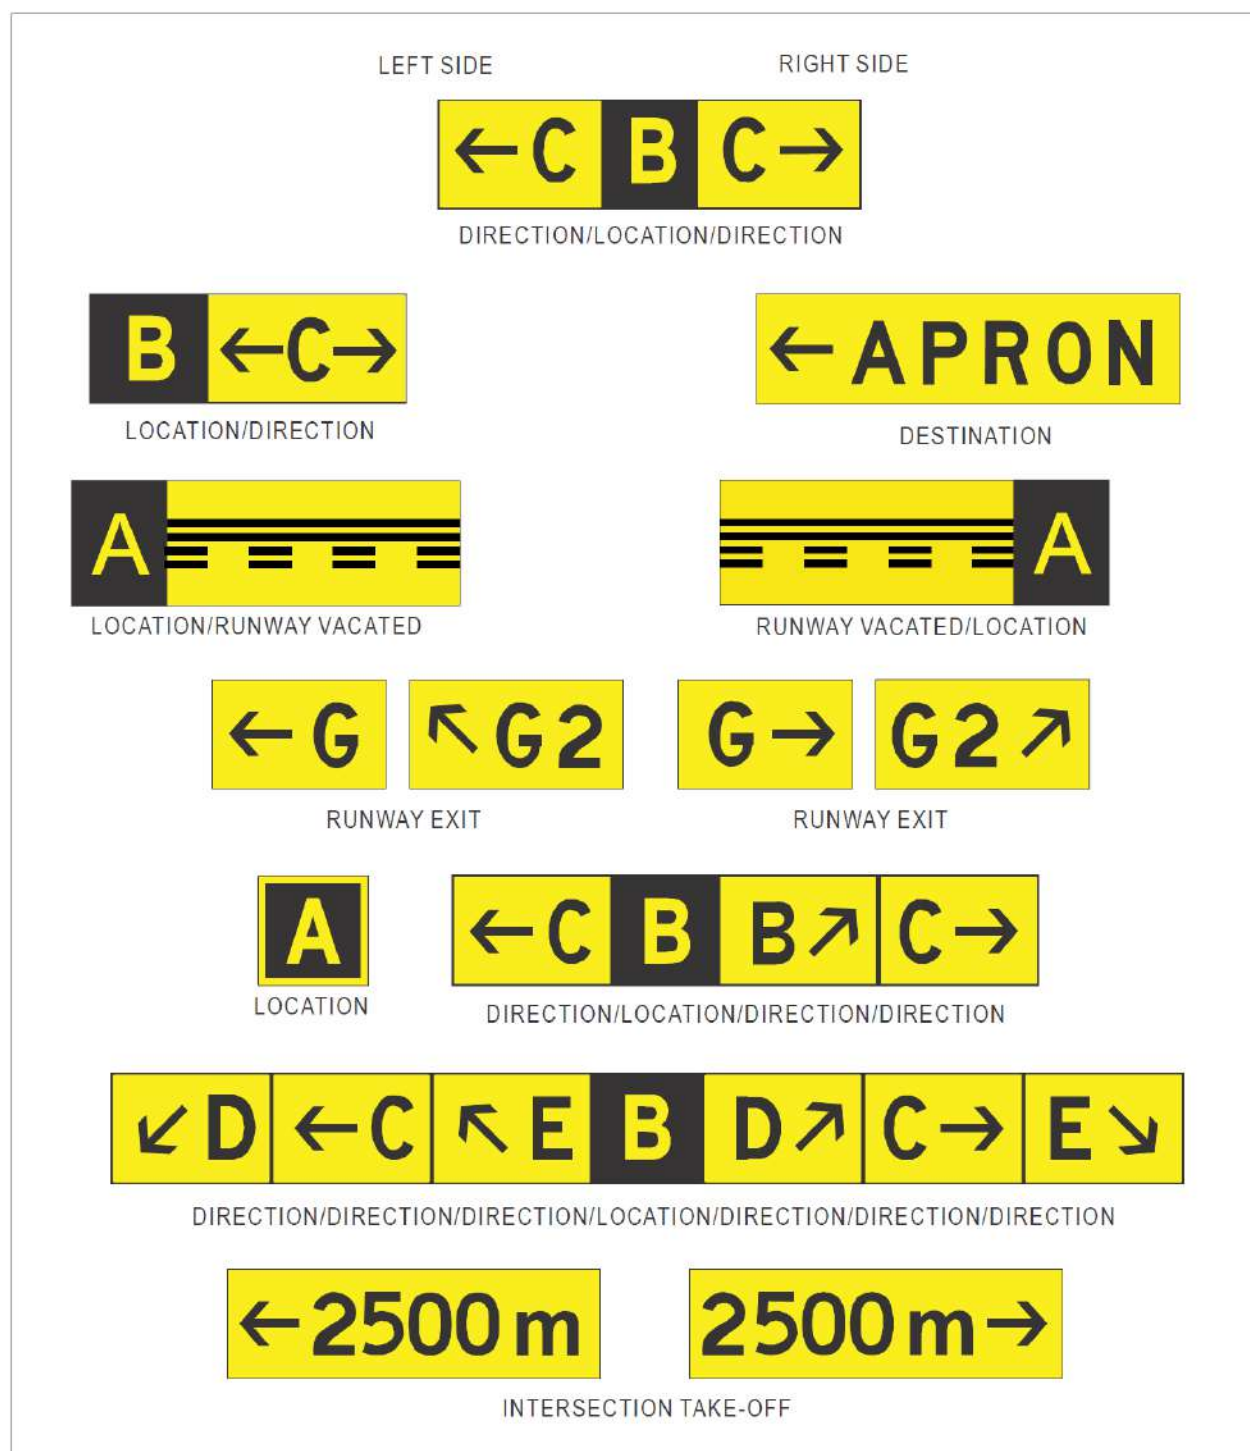


Figure 5-31. Information signs

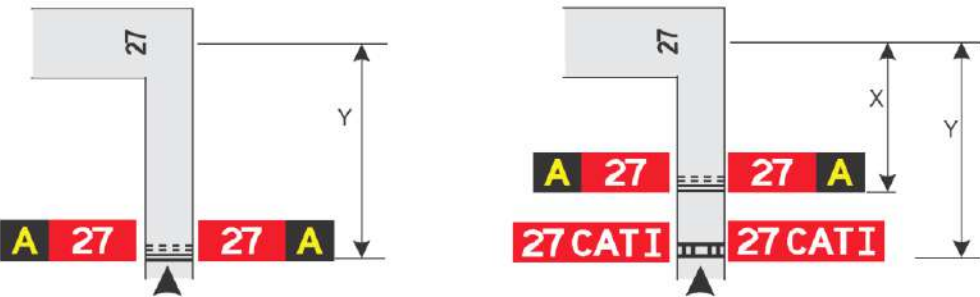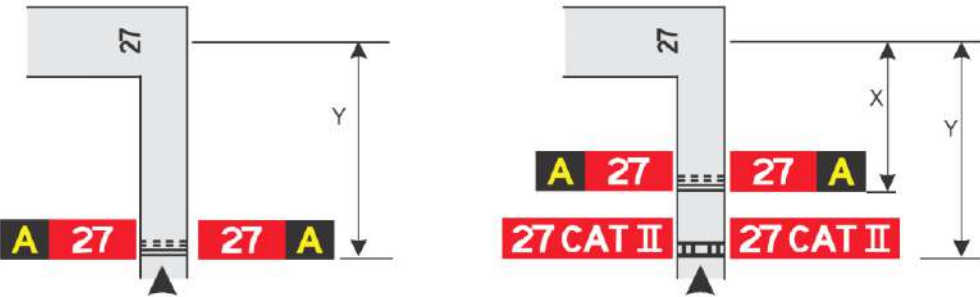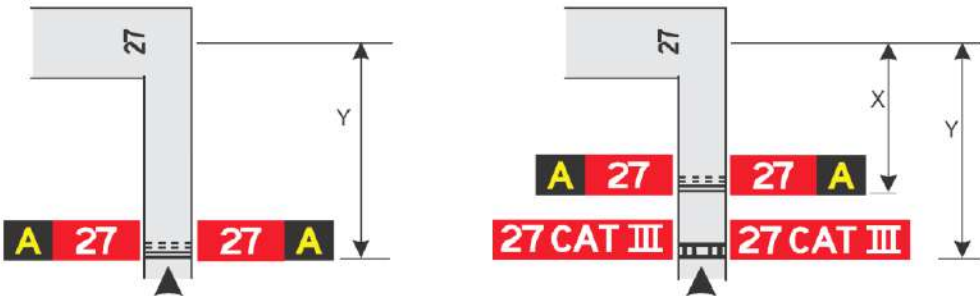

NON-INSTRUMENT, NON-PRECISION, TAKE-OFF RUNWAYS	
	
PRECISION APPROACH RUNWAYS	
CATEGORY I	
CATEGORY II	
CATEGORY III	

Note.— Distance *X* is established in accordance with Table 3-2. Distance *Y* is established at the edge of the ILS/MLS critical/sensitive area.

---

**Figure 5-32. Example of sign positions at taxiway/runway intersections**

## Characteristics

5.4.2.12 A mandatory instruction sign shall consist of an inscription in white on a red background.

5.4.2.13 Where, owing to environmental or other factors It is recommended that the conspicuity of the inscription on a mandatory instruction sign needs to be enhanced, the outside edge of the white inscription shall be supplemented by a black outline measuring 10 mm in width for runway code numbers 1 and 2, and 20 mm in width for runway code numbers 3 and 4.

5.4.2.14 The inscription on a runway designation sign shall consist of the runway designations of the intersecting runway properly oriented with respect to the viewing position of the sign, except that a runway designation sign installed in the vicinity of a runway extremity may show the runway designation of the concerned runway extremity only.

5.4.2.15 The inscription on a category I, II, III, joint II/III or joint I/II/III holding position sign shall consist of the runway designator followed by CAT I, CAT II, CAT III, CAT II/III or CAT I/II/III, as appropriate.

5.4.2.16 The inscription on a NO ENTRY sign shall be in accordance with Figure 5-30.

5.4.2.17 The inscription on a runway-holding position sign at a runway-holding position established in accordance with 3.12.3 shall consist of the taxiway designation and a number.

5.4.2.18 Where installed, inscriptions/symbol of figure 5-30 shall be used

## 5.4.3 Information signs

**Note:** See Figure 5-31 for pictorial representations of information signs.

### Application

5.4.3.1 An information sign shall be provided where there is an operational need to identify by a sign, a specific location, or routing (direction or destination) information.

5.4.3.2 Information signs shall include: direction signs, location signs, destination signs, runway exit signs, runway vacated signs and intersection take-off signs.

5.4.3.3 A runway exit sign shall be provided where there is an operational need to identify a runway exit.

5.4.3.4 A runway vacated sign shall be provided where the exit taxiway is not provided with taxiway centre line lights and there is a need to indicate to a pilot leaving a runway the perimeter of the ILS/MLS critical/sensitive area or the lower edge of the inner transitional surface, whichever is farther from the runway centre line.

**Note:** See 5.3.17 for specifications on colour coding taxiway centre line lights.

5.4.3.5 An intersection take-off sign shall be provided when such operation is permitted at an Aerodrome to indicate the remaining take-off run available (TORA).

5.4.3.6 Where necessary, a destination sign shall be provided to indicate the direction to a specific destination on the aerodrome, such as cargo area, general aviation, etc.

5.4.3.7 A combined location and direction sign shall be provided when it is intended to indicate routing information prior to a taxiway intersection.

5.4.3.8 A direction sign shall be provided when there is an operational need to identify the designation and direction of taxiways at an intersection.

5.4.3.9 A location sign shall be provided at an intermediate holding position.

5.4.3.10 A location sign shall be provided in conjunction with a runway designation sign except at a runway/runway intersection.

5.4.3.11 A location sign shall be provided in conjunction with a direction sign, except that it may be omitted where an aeronautical study indicates that it is not needed.

5.4.3.12 Where necessary, a location sign shall be provided to identify taxiways exiting an apron or taxiways beyond an intersection.

5.4.3.13 Where a taxiway ends at an intersection such as a “T” and it is necessary to identify this, a barricade, direction sign and/or other appropriate visual aid shall be used.

## Location

5.4.3.14 Except as specified in 5.4.3.16 and 5.4.3.24 information signs shall, wherever practicable, be located on the left-hand side of the taxiway in accordance with Table 5-5.

5.4.3.15 At a taxiway intersection, information signs shall be located prior to the intersection and in line with the intermediate holding position marking. Where there is no intermediate holding position marking, the signs shall be installed at least 60 m from the centre line of the intersecting taxiway where the code number is 3 or 4, and at least 40 m where the code number is 1 or 2.

**Note:** A location sign installed beyond a taxiway intersection may be installed on either side of a taxiway.

5.4.3.16 A runway exit sign shall be located on the same side of the runway as the exit is located (i.e. left or right) and positioned in accordance with Table 5-5.

5.4.3.17 A runway exit sign shall be located prior to the runway exit point in line with a position at least 60 m prior to the point of tangency where the code number is 3 or 4, and at least 30 m where the code number is 1 or 2.

5.4.3.18 A runway vacated sign shall be located at least on one side of the taxiway. The distance between the sign and the centre line of a runway shall be not less than the greater of the following:

- a) The distance between the centre line of the runway and the perimeter of the ILS/MLS critical/sensitive area; or
- b) The distance between the centre line of the runway and the lower edge of the inner transitional surface.

5.4.3.19 Where provided in conjunction with a runway vacated sign, the taxiway location sign shall be positioned outboard of the runway vacated sign.

5.4.3.20 An intersection take-off sign shall be located at the left-hand side of the entry taxiway. The distance between the sign and the centre line of the runway shall be not less than 60 m where the code number is 3 or 4, and not less than 45 m where the code number is 1 or 2.

5.4.3.21 A taxiway location sign installed in conjunction with a runway designation sign shall be positioned outboard of the runway designation sign.

5.4.3.22 A destination sign shall not normally be collocated with a location or direction sign.

5.4.3.23 An information sign other than a location sign shall not be collocated with a mandatory instruction sign.

5.4.3.24 A direction sign, barricade and/or other appropriate visual aid used to identify a “T” intersection shall be located on the opposite side of the intersection facing the taxiway.

### **Characteristics**

5.4.3.25 An information sign other than a location sign shall consist of an inscription in black on a yellow background.

5.4.3.26 A location sign shall consist of an inscription in yellow on a black background and where it is a stand-alone sign shall have a yellow border.

5.4.3.27 The inscription on a runway exit sign shall consist of the designator of the exit taxiway and an arrow indicating the direction to follow.

5.4.3.28 The inscription on a runway vacated sign shall depict the pattern A runway-holding position marking as shown in Figure 5-31.

5.4.3.29 The inscription on an intersection take-off sign shall consist of a numerical message indicating the remaining take-off run available in metres plus an arrow, appropriately located and oriented, indicating the direction of the take-off as shown in Figure 5-31.

5.4.3.30 The inscription on a destination sign shall comprise an alpha, alphanumerical or numerical message identifying the destination plus an arrow indicating the direction to proceed as shown in Figure 5-31.

5.4.3.31 The inscription on a direction sign shall comprise an alpha or alphanumerical message identifying the taxiway(s) plus an arrow or arrows appropriately oriented as shown in Figure 5-31.

5.4.3.32 The inscription on a location sign shall comprise the designation of the location taxiway, runway or other pavement the aircraft is on or is entering and shall not contain arrows.

5.4.3.33 Where it is necessary to identify each of a series of intermediate holding positions on the same taxiway, the location sign shall consist of the taxiway designation and a number.

5.4.3.34 Where a location sign and direction signs are used in combination:

- a) All direction signs related to left turns shall be placed on the left side of the location sign, and all direction signs related to right turns shall be placed on the right side of the location sign, except that where the junction consists of one intersecting taxiway, the location sign may alternatively be placed on the left-hand side;
- b) The direction signs shall be placed such that the direction of the arrows departs increasingly from the vertical with increasing deviation of the corresponding taxiway;
- c) An appropriate direction sign shall be placed next to the location sign where the direction of the location taxiway changes significantly beyond the intersection; and
- d) Adjacent direction signs shall be delineated by a vertical black line as shown in Figure 5-31.

5.4.3.35 A taxiway shall be identified by a designator comprising a letter, letters or a combination of a letter or letters followed by a number.

5.4.3.36 When designating taxiways, the use of the letters I, O or X and the use of words such as inner and outer shall be avoided wherever possible to avoid confusion with the numerals 1, 0 and closed marking.

5.4.3.37 The use of numbers alone on the manoeuvring area shall be reserved for the designation of runways.

#### **5.4.4 VOR aerodrome checkpoint sign**

##### **Application**

5.4.4.1 When a VOR aerodrome checkpoint is established, it shall be indicated by a VOR aerodrome checkpoint marking and sign.

**Note:** See 5.2.12 for VOR aerodrome checkpoint marking.

## Location

5.4.4.2 A VOR aerodrome checkpoint sign shall be located as near as possible to the checkpoint and so that the inscriptions are visible from the cockpit of an aircraft properly positioned on the VOR aerodrome checkpoint marking.


## Characteristics

5.4.4.3 A VOR aerodrome checkpoint sign shall consist of an inscription in black on a yellow background.

5.4.4.4 The inscriptions on a VOR checkpoint sign shall be in accordance with one of the alternatives shown in Figure 5-33 in which:

- VOR* Is an abbreviation identifying this as a VOR checkpoint;  
*116.3* Is an example of the radio frequency of the VOR concerned;  
*147°* Is an example of the VOR bearing, to the nearest degree, which shall be indicated at the VOR checkpoint; and  
*4.3 NM* Is an example of the distance in nautical miles to a DME collocated with the VOR concerned.

**Note:** Tolerances for the bearing value shown on the sign are given in Annex 10, Attachment E. It will be noted that a checkpoint can only be used operationally when periodic checks show it to be consistently within  $\pm 2$  degrees of the stated bearing.

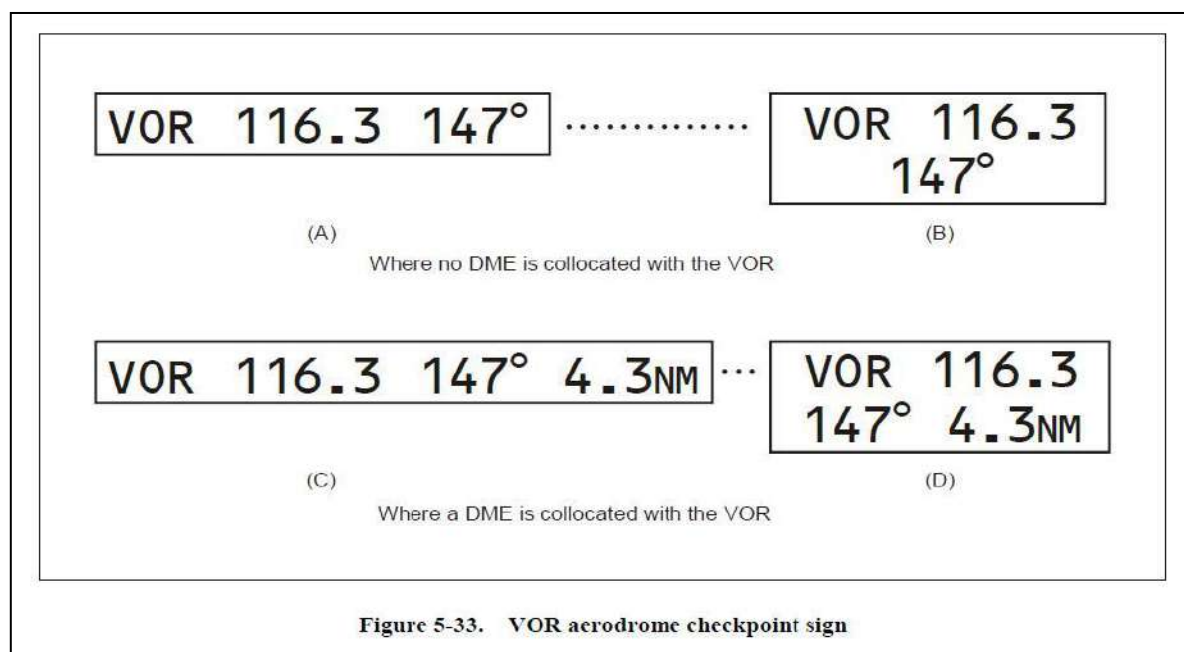

### **5.4.5 Aerodrome identification sign**

#### **Application**

5.4.5.1 An aerodrome identification sign shall be provided at an aerodrome where there is insufficient alternative means of visual identification.

#### **Location**

5.4.5.2 The aerodrome identification sign shall be placed on the aerodrome so as to be legible, in so far as is practicable, at all angles above the horizontal.

#### **Characteristics**

5.4.5.3 The aerodrome identification sign shall consist of the name of the aerodrome.

5.4.5.4 The colour selected for the sign shall give adequate conspicuity when viewed against its background.

5.4.5.5 The characters shall have a height of not less than 3 m.

### **5.4.6 Aircraft stand identification signs**

#### **Application**

5.4.6.1 An aircraft stand identification marking shall be supplemented with an aircraft stand identification sign where feasible.

#### **Location**

5.4.6.2 An aircraft stand identification sign shall be located so as to be clearly visible from the cockpit of an aircraft prior to entering the aircraft stand.

#### **Characteristics**

5.4.6.3 An aircraft stand identification sign shall consist of an inscription in black on a yellow background or as instructed by PACA.

### **5.4.7 Road-holding position sign**

5.4.7.1 A road-holding position sign shall be provided (see illustration below) at all road entrances to a runway.





**Road Holding Position Sign and Lights**

### Location

5.4.7.2 The road-holding position sign shall be located 1.5 m from one edge of the road (left or right as appropriate to the local traffic regulations) at the holding position.

### Characteristics

5.4.7.3 A road-holding position sign shall consist of an inscription in white on a red background.

5.4.7.4 The inscription on a road-holding position sign shall be in the national language, be in conformity with the local traffic regulations and include the following:

- a) A requirement to stop; and
- b) Where appropriate:
  - 1) A requirement to obtain ATC clearance; and
  - 2) Location designator.

---

**Note:** Examples of road-holding position signs are contained in the Aerodrome Design Manual (Doc 9157), Part 4.

5.4.7.5 A road-holding position sign intended for night use shall be retroreflective or illuminated.

## **5.5 Markers**

### **5.5.1 General**

Markers shall be frangible. Those located near a runway or taxiway shall be sufficiently low to preserve clearance for propellers and for the engine pods of jet aircraft.

**Note 1:** Anchors or chains, to prevent markers which have broken from their mounting from blowing away, are sometimes used.

**Note 2:** Guidance on frangibility of markers is given in the Aerodrome Design Manual (Doc 9157), Part 6.

### **5.5.2 Unpaved runway edge markers**

#### **Application**

5.5.2.1 Markers shall be provided when the extent of an unpaved runway is not clearly indicated by the appearance of its surface compared with that of the surrounding ground.

#### **Location**

5.5.2.2 Where runway lights are provided, the markers shall be incorporated in the light fixtures. Where there are no lights, markers of flat rectangular or conical shape shall be placed so as to delimit the runway clearly.

#### **Characteristics**

5.5.2.3 The flat rectangular markers shall have a minimum size of 1 m by 3 m and shall be placed with their long dimension parallel to the runway centre line. The conical markers shall have a height not exceeding 50 cm.

### 5.5.3 Stopway edge markers

#### Application

5.5.3.1 Stopway edge markers shall be provided when the extent of a stopway is not clearly indicated by its appearance compared with that of the surrounding ground.

#### Characteristics

5.5.3.2 The stopway edge markers shall be sufficiently different from any runway edge markers used to ensure that the two types of markers cannot be confused.

***Note:** Markers consisting of small vertical boards camouflaged on the reverse side, as viewed from the runway, have proved operationally acceptable.*

### 5.5.4 Edge Markers for snow-covered runways- NA

### 5.5.5 Taxiway edge markers

#### Application

5.5.5.1 Taxiway edge markers shall be provided on a taxiway where the code number is 1 or 2 and taxiway centre line or edge lights or taxiway centre line markers are not provided.

#### Location

5.5.5.2 Taxiway edge markers shall be installed at least at the same locations as would the taxiway edge lights had they been used.

#### Characteristics

5.5.5.3 A taxiway edge marker shall be retroreflective blue.

5.5.5.4 The marked surface as viewed by the pilot shall be a rectangle and shall have a minimum viewing area of 150 cm<sup>2</sup>.

5.5.5.5 Taxiway edge markers shall be frangible. Their height shall be sufficiently low to preserve clearance for propellers and for the engine pods of jet aircraft.

### 5.5.6 Taxiway centre line markers

#### Application

5.5.6.1 Taxiway centre line markers shall be provided on a taxiway where the code number 1 or 2 and taxiway centre line or edge lights or taxiway edge markers are not provided.

5.5.6.2 Taxiway centre line markers shall be provided on a taxiway where the code number is 3 or 4 and taxiway centre line lights are not provided if there is a need to improve the guidance provided by the taxiway centre line marking.

### **Location**

5.5.6.3 Taxiway centre line markers shall be installed at least at the same location as would taxiway centre line lights had they been used.

**Note:** See 5.3.17.12 for the spacing of taxiway centre line lights.

5.5.6.4 Taxiway centre line markers shall normally be located on the taxiway centre line marking except that they may be offset by not more than 30 cm where it is not practicable to locate them on the marking.

### **Characteristics**

5.5.6.5 A taxiway centre line marker shall be retroreflective green.

5.5.6.6 The marked surface as viewed by the pilot shall be a rectangle and shall have a minimum viewing area of 20 cm<sup>2</sup>.

5.5.6.7 Taxiway centre line markers shall be so designed and fitted as to withstand being run over by the wheels of an aircraft without damage either to the aircraft or to the markers themselves.

## **5.5.7 Unpaved taxiway edge markers**

### **Application**

5.5.7.1 Where the extent of an unpaved taxiway is not clearly indicated by its appearance compared with that of the surrounding ground, markers shall be provided.

### **Location**

5.5.7.2 Where taxiway lights are provided, the markers shall be incorporated in the light fixtures. Where there are no lights, markers of conical shape shall be placed so as to delimit the taxiway clearly.

## **5.5.8 Boundary markers**

### **Application**


5.5.8.1 Boundary markers shall be provided at an aerodrome where the landing area has no runway.

## Location

5.5.8.2 Boundary markers shall be spaced along the boundary of the landing area at intervals of not more than 200 m, if the type shown in Figure 5-34 is used, or approximately 90 m, if the conical type is used with a marker at any corner.

## Characteristics

5.5.8.3 Boundary markers shall be of a form similar to that shown in Figure 5-34, or in the form of a cone not less than 50 cm high and not less than 75 cm in diameter at the base. The markers shall be coloured to contrast with the background against which they will be seen. A single colour, orange or red, or two contrasting colours, orange and white or alternatively red and white, shall be used, except where such colours merge with the background.

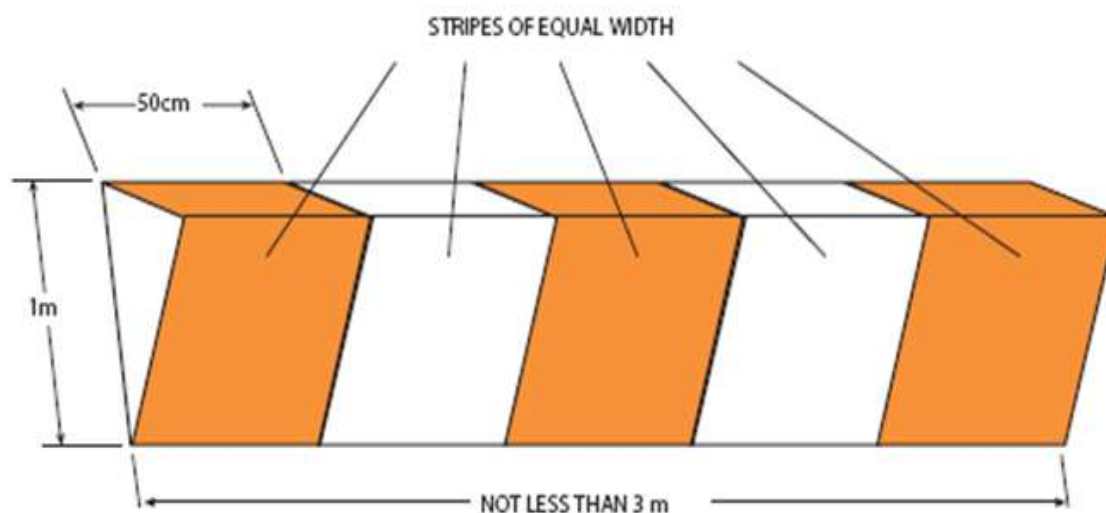

**Figure 5-34. Boundary Markers**

---

## CHAPTER 6 - VISUAL AIDS FOR DENOTING OBSTACLES

### 6.1 Objects to be marked and/or lighted

**Note:** *The marking and/or lighting of obstacles is intended to reduce hazards to aircraft by indicating the presence of the obstacles. It does not necessarily reduce operating limitations which may be imposed by an obstacle.*

#### 6.1.1 Objects within the lateral boundaries of the obstacle limitation surfaces

6.1.1.1 Vehicles and other mobile objects, excluding aircraft, on the movement area of an aerodrome are obstacles and shall be marked and, if the vehicles and aerodrome are used at night or in conditions of low visibility, lighted, except that aircraft servicing equipment and vehicles used only on aprons may be exempt, subject to prior approval from PACA.

6.1.1.2 Elevated aeronautical ground lights within the movement area shall be marked so as to be conspicuous by day. Obstacle lights shall not be installed on elevated ground lights or signs in the movement area.

6.1.1.3 All obstacles within the distance specified in Table 3-1, column 11 or 12, from the centre line of a taxiway, an apron taxiway or aircraft stand taxilane shall be marked and, if the taxiway, apron taxiway or aircraft stand taxilane is used at night, lighted.

6.1.1.4 A fixed obstacle that extends above a take-off climb surface within 3 000 m of the inner edge of the take-off climb surface shall be marked and, if the runway is used at night, lighted, except that:

- a) Such marking and lighting may be omitted when the obstacle is shielded by another fixed obstacle;
- b) The marking may be omitted when the obstacle is lighted by medium-intensity obstacle lights, Type A, by day and its height above the level of the surrounding ground does not exceed 150 m;
- c) The marking may be omitted when the obstacle is lighted by high-intensity obstacle lights by day; and
- d) The lighting may be omitted where the obstacle is a lighthouse and an aeronautical study indicates the lighthouse light to be sufficient.

6.1.1.5 A fixed object, other than an obstacle, adjacent to a take-off climb surface shall be marked and, if the runway is used at night, lighted, if such marking and lighting is considered necessary to ensure its avoidance, except that the marking may be omitted when:

- a) The object is lighted by medium-intensity obstacle lights, Type A, by day and its height above the level of the surrounding ground does not exceed 150 m; or
- b) The object is lighted by high-intensity obstacle lights by day.

6.1.1.6 A fixed obstacle that extends above an approach surface within 3 000 m of the inner edge or above a transitional surface shall be marked and, if the runway is used at night, lighted, except that:

- a) Such marking and lighting may be omitted when the obstacle is shielded by another fixed obstacle;
- b) The marking may be omitted when the obstacle is lighted by medium-intensity obstacle lights, Type A, by day and its height above the level of the surrounding ground does not exceed 150 m;
- c) The marking may be omitted when the obstacle is lighted by high-intensity obstacle lights by day; and
- d) The lighting may be omitted where the obstacle is a lighthouse and an aeronautical study indicates the lighthouse light to be sufficient.

6.1.1.7 A fixed obstacle that extends above a horizontal surface shall be marked and, if the aerodrome is used at night, lighted, except that:

- a) Such marking and lighting may be omitted when:
  - 1) The obstacle is shielded by another fixed obstacle; or
  - 2) For a circuit extensively obstructed by immovable objects or terrain, procedures have been established to ensure safe vertical clearance below prescribed flight paths; or
  - 3) An aeronautical study shows the obstacle not to be of operational significance;
- b) The marking may be omitted when the obstacle is lighted by medium-intensity obstacle lights, Type A, by day and its height above the level of the surrounding ground does not exceed 150 m;
- c) The marking may be omitted when the obstacle is lighted by high-intensity obstacle lights by day; and
- d) The lighting may be omitted where the obstacle is a lighthouse and an aeronautical study indicates the lighthouse light to be sufficient.

6.1.1.8 A fixed object that extends above an obstacle protection surface shall be marked and, if the runway is used at night, lighted.

**Note:** See 5.3.5 for information on the obstacle protection surface.

6.1.1.9 Other objects inside the obstacle limitation surfaces shall be marked and/or lighted if an aeronautical study indicates that the object could constitute a hazard to aircraft (this includes objects adjacent to visual routes e.g. waterway or highway).

**Note:** See note accompanying 4.4.2.

6.1.1.10 Overhead wires, cables, shall be marked and their supporting towers marked and lighted unless an aeronautical study indicates that the wires or cables do not constitute a hazard to aircraft.

## **6.1.2 Objects outside the lateral boundaries of the obstacle limitation surfaces**

6.1.2.1 Obstacles in accordance with 4.3.2 shall be marked and lighted, except that the marking may be omitted when the obstacle is lighted by high-intensity obstacle lights by day.

6.1.2.2 Other objects outside the obstacle limitation surfaces shall be marked and/or lighted if an aeronautical study indicates that the object could constitute a hazard to aircraft (this includes objects adjacent to visual routes e.g. waterway, highway).

6.1.2.3 Overhead wires, cables, shall be marked and their supporting towers marked and lighted unless an aeronautical study indicates that the wires or cables do not constitute a hazard to aircraft.

## **6.2 Marking and /or lighting of objects**

### **6.2.1 General**

6.2.1.1 The presence of objects which must be lighted, as specified in 6.1, shall be indicated by low-, medium- or high-intensity obstacle lights, or a combination of such lights.

6.2.1.2 Low-intensity obstacle lights, Types A, B, C, D and E, medium-intensity obstacle lights, Types A, B and C, high intensity obstacle lights Type A and B, shall be in accordance with the specifications in Table 6-1 and Appendix 1.

6.2.1.3 The number and arrangement of low-, medium- or high-intensity obstacle lights at each level to be marked shall be such that the object is indicated from every angle in azimuth. Where a light is shielded in any direction by another part of the object, or by an adjacent object, additional lights shall be provided on that adjacent object or the part of the object that is shielding the light, in such a way as to retain the general definition of the object to be lighted. If the shielded light does not contribute to the definition of the object to be lighted, it may be omitted.

### **6.2.2 Mobile Object**

#### **Marking**

6.2.2.1 All mobile objects to be marked shall be coloured or display flags.



---

## Marking by colour

6.2.2.2 When mobile objects are marked by colour, a single conspicuous colour, preferably red or yellowish green for emergency vehicles and yellow for service vehicles, shall be used.

## Marking by flags

6.2.2.3 Flags used to mark mobile objects shall be displayed around, on top of, or around the highest edge of the object. Flags shall not increase the hazard presented by the object they mark.

6.2.2.4 Flags used to mark mobile objects shall not be less than 0.9 m on each side and shall consist of a chequered pattern, each square having sides of not less than 0.3 m. The colours of the pattern shall contrast each with the other and with the background against which they will be seen. Orange and white or alternatively red and white shall be used, except where such colours merge with the background.

## Lighting

6.2.2.5 Low-intensity obstacle lights, Type C, shall be displayed on vehicles and other mobile objects excluding aircraft.

**Note:** See Annex 2 for lights to be displayed by aircraft.

6.2.2.6 Low-intensity obstacle lights, Type C, displayed on vehicles associated with emergency or security shall be flashing-blue and those displayed on other vehicles shall be flashing-yellow.

6.2.2.7 Low-intensity obstacle lights, Type D, shall be displayed on follow-me vehicles.

6.2.2.8 Low-intensity obstacle lights on objects with limited mobility such as aerobridges shall be fixed-red, and as a minimum be in accordance with the specifications for low-intensity obstacle lights, Type A, in Table 6-1. The intensity of the lights shall be sufficient to ensure conspicuity considering the intensity of the adjacent lights and the general levels of illumination against which they would normally be viewed.

**Table 6-1. Characteristics of obstacle lights**

1	2	3	4	5	6	7
Light Type	Colour	Signal type/ (flash rate)	Peak intensity (cd) at given Background Luminance (b)			Light Distribution Table
			Day (Above 500 cd/m <sup>2</sup> )	Twilight (50-500 cd/m <sup>2</sup> )	Night (Below 50 cd/m <sup>2</sup> )	
Low-intensity, Type A (fixed obstacle)	Red	Fixed	N/A	N/A	10	Table 6-2
Low-intensity, Type B (fixed obstacle)	Red	Fixed	N/A	N/A	32	Table 6-2
Low-intensity, Type C (mobile obstacle)	Yellow/Blue (a)	Flashing (60-90 fpm)	N/A	40	40	Table 6-2
Low-intensity, Type D (follow-me vehicle)	Yellow	Flashing (60-90 fpm)	N/A	200	200	Table 6-2
Low-intensity, Type E	Red	Flashing (c)	N/A	N/A	32	Table 6-2 (Type B)
Medium-intensity, Type A	White	Flashing (20-60 fpm)	20 000	20 000	2 000	Table 6-3
Medium-intensity, Type B	Red	Flashing (20-60 fpm)	N/A	N/A	2 000	Table 6-3
Medium-intensity, Type C	Red	Fixed	N/A	N/A	2 000	Table 6-3
High-intensity, Type A	White	Flashing (40-60 fpm)	200 000	20 000	2 000	Table 6-3
High-intensity, Type B	White	Flashing (40-60 fpm)	100 000	20 000	2 000	Table 6-3

a) See 6.2.2.6.

b) For flashing lights, effective intensity as determined in accordance with the *Aerodrome Design Manual (Doc 9157), Part 4*.

c) For wind turbine application, to flash at the same rate as the lighting on the nacelle.

**Table 6-2. Light Distribution for Low-Intensity Obstacle Lights**

	Minimum intensity (a)	Maximum intensity (a)	Vertical beam spread (f)	
			Minimum beam spread	Intensity
Type A	10 cd (b)	N/A	10°	5 cd
Type B	32 cd (b)	N/A	10°	16 cd
Type C	40 cd (b)	400 cd	12° (d)	20 cd
Type D	200 cd (c)	400 cd	N/A (e)	N/A

**Note:** This table does not include recommended horizontal beam spreads. 6.2.1.3 requires 360° coverage around an obstacle. Therefore, the number of lights needed to meet this requirement will depend on the horizontal beam spreads of each light as well as the shape of the obstacle. Thus, with narrower beam spreads, more lights will be required.

- a) 360° horizontal. For flashing lights, the intensity is read into effective intensity, as determined in accordance with the Aerodrome Design Manual (Doc 9157), Part 4.
- b) Between 2 and 10° vertical. Elevation vertical angles are referenced to the horizontal when the light is levelled.
- c) Between 2 and 20° vertical. Elevation vertical angles are referenced to the horizontal when the light is levelled.
- d) Peak intensity shall be located at approximately 2.5° vertical.
- e) Peak intensity shall be located at approximately 17° vertical.
- f) Beam spread is defined as the angle between the horizontal plane and the directions for which the intensity exceeds that mentioned in the “intensity” column.

**Table 6-3. Light Distribution for Medium and High-Intensity Obstacle Lights According to Benchmark Intensities of Table 6-1**

Benchmark intensity	Minimum requirements					Recommendations				
	Vertical elevation angle (b)			Vertical beam spread (c)		Vertical elevation angle (b)			Vertical beam spread (c)	
	0°		-1°			0°	-1°	-10°		
	Minimum average intensity (a)	Minimum intensity (a)	Minimum intensity (a)	Minimum beam spread	Intensity (a)	Maximum intensity (a)	Maximum intensity (a)	Maximum intensity (a)	Maximum beam spread	Intensity (a)
200 000	200 000	150 000	75 000	3°	75 000	250 000	112 500	7 500	7°	75 000
100 000	100 000	75 000	37 500	3°	37 500	125 000	56 250	3 750	7°	37 500
20 000	20 000	15 000	7 500	3°	7 500	25 000	11 250	750	N/A	N/A
2 000	2 000	1 500	750	3°	750	2 500	1 125	75	N/A	N/A

**Note:** Table 6-3. Does not include recommended horizontal beam spreads. 6.2.1.3 requires 360° coverage around an obstacle. Therefore, the number of lights needed to meet this requirement will depend on the horizontal beam spreads of each light as well as the shape of the obstacle. Thus, with narrower beam spreads, more lights will be required.

- a) 360° horizontal. All intensities are expressed in Candela. For flashing lights, the intensity is read into effective intensity, as determined in accordance with the Aerodrome Design Manual (Doc 9157), Part 4.
- b) Elevation vertical angles are referenced to the horizontal when the light unit is levelled.
- c) Beam spread is defined as the angle between the horizontal plane and the directions for which the intensity exceeds that mentioned in the “intensity” column.

**Note:** An extended beam spread may be necessary under specific configuration and justified by an aeronautical study.

### 6.2.3 Fixed Objects

**Note:** The fixed objects of wind turbines are addressed separately in 6.2.4 and the fixed objects of overhead wires, cables, etc., and supporting towers are addressed separately in 6.2.5.

#### Marking

6.2.3.1 All fixed objects to be marked shall, whenever practicable, be coloured, but if this is not practicable, markers or flags shall be displayed on or above them, except that objects that are sufficiently conspicuous by their shape, size or colour need not be otherwise marked.

#### Marking by colour


6.2.3.2 An object shall be coloured to show a chequered pattern if it has essentially unbroken surfaces and its projection on any vertical plane equals or exceeds 4.5 m in both dimensions. The pattern shall consist of rectangles of not less than 1.5 m and not more than 3 m on a side, the corners being of the darker colour. The colours of the pattern shall contrast each with the other and with the background against which they will be seen. Orange and white or alternatively red and white shall be used, except where such colours merge with the background. (See Figure 6-1.)

6.2.3.3 An object shall be coloured to show alternating contrasting bands if:

- a) It has essentially unbroken surfaces and has one dimension, horizontal or vertical, greater than 1.5 m, and the other dimension, horizontal or vertical, less than 4.5 m; or
- b) It is of skeletal type with either a vertical or a horizontal dimension greater than 1.5 m.

The bands shall be perpendicular to the longest dimension and have a width approximately 1/7 of the longest dimension or 30 m, whichever is less. The colours of the bands shall contrast with the background against which they will be seen. Orange and white shall be used, except where such colours are not conspicuous when viewed against the background. The bands on the extremities of the object shall be of the darker colour. (See Figures 6-1 and 6-2.)

**Note:** Table 6-4 shows a formula for determining band widths and for having an odd number of bands, thus permitting both the top and bottom bands to be of the darker colour.

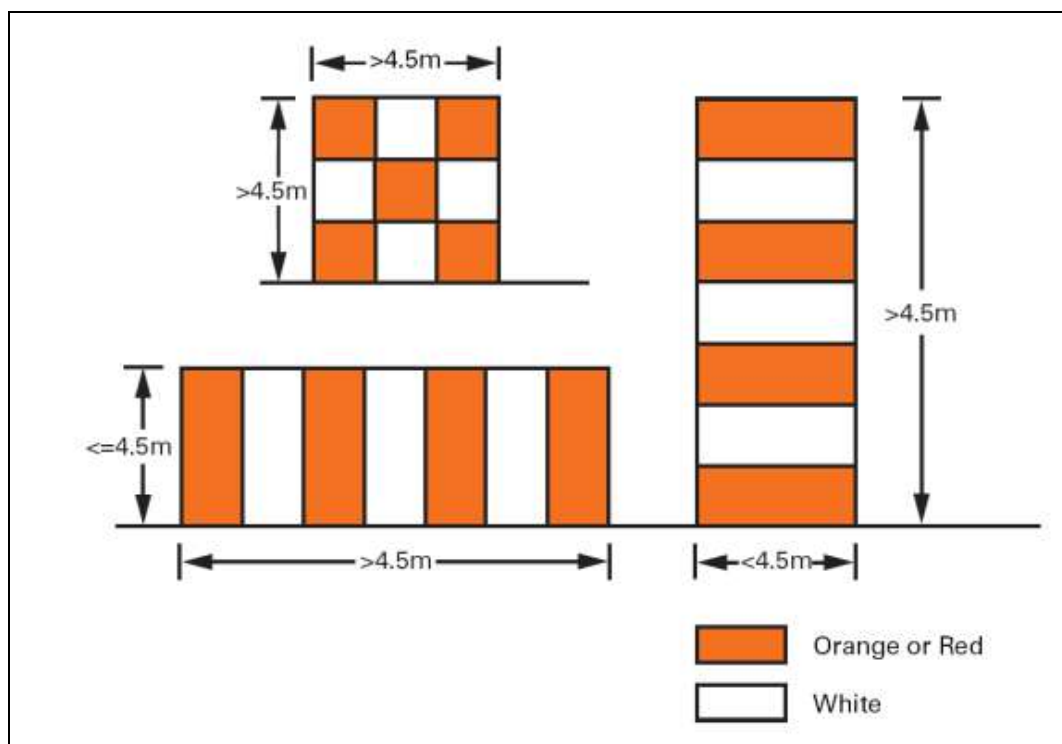

**Figure 6-1. Basic Marking Patterns**

**Table 6-4. Marking Band Widths**

Longest dimension		Band width
Greater than	Not exceeding	
1.5 m	210 m	1/7 of longest dimension
210 m	270 m	1/9 " " "
270 m	330 m	1/11 " " "
330 m	390 m	1/13 " " "
390 m	450 m	1/15 " " "
450 m	510 m	1/17 " " "
510 m	570 m	1/19 " " "
570 m	630 m	1/21 " " "

6.2.3.4 An object shall be coloured in a single conspicuous colour if its projection on any vertical plane has both dimensions less than 1.5 m. Orange or red shall be used, except where such colours merge with the background.

**Note:** *Against some backgrounds it may be found necessary to use a different colour from orange or red to obtain sufficient contrast.*

### **Marking by flags**

6.2.3.5 Flags used to mark fixed objects shall be displayed around, on top of, or around the highest edge of, the object. When flags are used to mark extensive objects or groups of closely spaced objects, they shall be displayed at least every 15 m. Flags shall not increase the hazard presented by the object they mark.


6.2.3.6 Flags used to mark fixed objects shall not be less than 0.6 m on each side.

6.2.3.7 Flags used to mark fixed objects shall be orange in colour or a combination of two triangular sections, one orange and the other white, or one red and the other white, except that where such colours merge with the background, other conspicuous colours shall be used.

### **Marking by markers**

6.2.3.8 Markers displayed on or adjacent to objects shall be located in conspicuous positions so as to retain the general definition of the object and shall be recognizable in clear weather from a distance of at least 1 000 m for an object to be viewed from the air and 300 m for an object to be viewed from the ground in all directions in which an aircraft is likely to approach the object. The shape of markers shall be distinctive to the extent necessary to ensure that they are not mistaken for markers employed to convey other information, and they shall be such that the hazard presented by the object they mark is not increased.

6.2.3.9 A marker shall be of one colour. When installed, white and red, or white and orange markers shall be displayed alternately. The colour selected shall contrast with the background against which it will be seen.

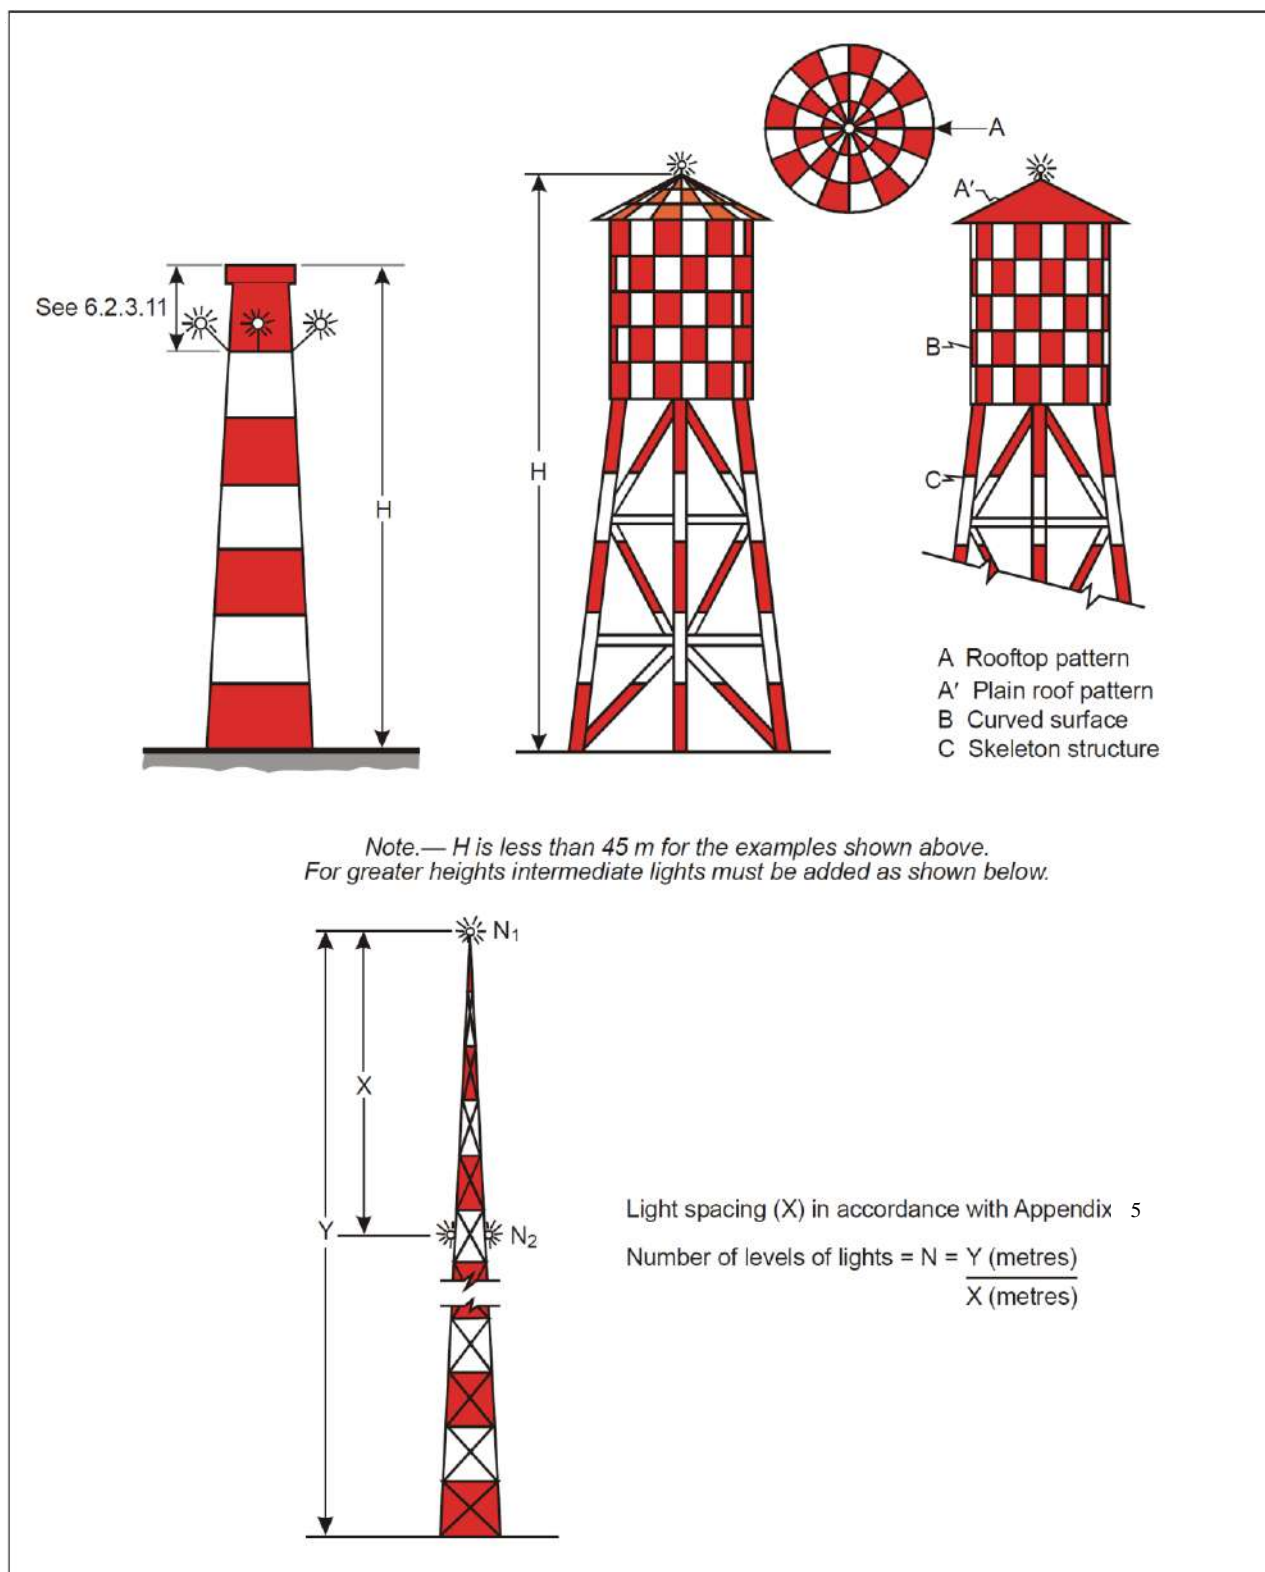

**Figure 6-2. Examples of Marking and Lighting of Tall Structure**

## Lighting

6.2.3.10 In the case of an object to be lighted, one or more low-, medium- or high-intensity obstacle lights shall be located as close as practicable to the top of the object.

**Note:** Recommendations on how a combination of low-, medium- and/or high-intensity lights on obstacles shall be displayed are given in Appendix 5.

6.2.3.11 In the case of chimney or other structure of like function, the top lights shall be placed sufficiently below the top so as to minimize contamination by smoke, etc. (See Figure 6-2).

6.2.3.12 In the case of a tower or antenna structure indicated by high-intensity obstacle lights by day with an appurtenance, such as a rod or an antenna, greater than 12 m where it is not practicable to locate a high-intensity obstacle light on the top of the appurtenance, such a light shall be located at the highest practicable point and, if practicable, a medium-intensity obstacle light, Type A, mounted on the top.

6.2.3.13 In the case of an extensive object or of a group of closely spaced objects to be Lighted that are:

- a) Penetrating a horizontal obstacle limitation surface (OLS) or located outside an OLS, the top lights shall be so arranged as to at least indicate the points or edges of the object highest in relation to the obstacle limitation surface or above the ground, and so as to indicate the general definition and the extent of the objects; and
- b) Penetrating a sloping OLS, the top lights shall be so arranged as to at least indicate the points or edges of the object highest in relation to the OLS, and so as to indicate the general definition and the extent of the objects. If two or more edges are of the same height, the edge nearest the landing area shall be marked.

6.2.3.14 When the obstacle limitation surface concerned is sloping and the highest point above the OLS is not the highest point of the object, additional obstacle lights shall be placed on the highest point of the object.

6.2.3.15 Where lights are applied to display the general definition of an extensive object or a group of closely spaced objects, and

- a) Low-intensity lights are used, they shall be spaced at longitudinal intervals not exceeding 45 m; and
- b) Medium-intensity lights are used, they shall be spaced at longitudinal intervals not exceeding 900 m.

6.2.3.16 High-intensity obstacle lights, Type A, and medium-intensity obstacle lights, Types A and B, located on an object shall flash simultaneously.



6.2.3.17 The installation setting angles for high-intensity obstacle lights, Type A, shall be in accordance with Table 6-5.

**Note:** *High-intensity obstacle lights are intended for day use as well as night use. Care is needed to ensure that these lights do not create disconcerting dazzle. Guidance on the design, location and operation of high-intensity obstacle lights is given in the Aerodrome Design Manual (Doc 9157), Part 4.*

6.2.3.18 Where, in the opinion of PACA, the use of high-intensity obstacle lights, Type A, or medium-intensity obstacle lights, Type A, at night may dazzle pilots in the vicinity of an aerodrome (within approximately 10 000 m radius) or cause significant environmental concerns, a dual obstacle lighting system shall be provided. This system shall be composed of high-intensity obstacle lights, Type A, or medium-intensity obstacle lights, Type A, as appropriate, for daytime and twilight use and medium-intensity obstacle lights, Type B or C, for night-time use.

### **Lighting of objects with a height less than 45 m above ground level**

6.2.3.19 Low-intensity obstacle lights, Type A or B, shall be used where the object is a less extensive one and its height above the surrounding ground is less than 45 m.

6.2.3.20 Where the use of low-intensity obstacle lights, Type A or B, would be inadequate or an early special warning is required, then medium- or high-intensity obstacle lights shall be used.

6.2.3.21 Low-intensity obstacle lights, Type B, shall be used either alone or in combination with medium-intensity obstacle lights, Type B, in accordance with 6.2.3.22.

6.2.3.22 Medium-intensity obstacle lights, Type A, B or C, shall be used where the object is an extensive one. Medium-intensity obstacle lights, Types A and C, shall be used alone, whereas medium-intensity obstacle lights, Type B, shall be used either alone or in combination with low-intensity obstacle lights, Type B.

**Note:** *A group of buildings is regarded as an extensive object.*

### **Lighting of objects with a height 45 m to a height less than 150 m above ground level**

6.2.3.23 Medium-intensity obstacle lights, Type A, B or C, shall be used. Medium-intensity obstacle lights, Types A and C, shall be used alone, whereas medium-intensity obstacle lights, Type B, shall be used either alone or in combination with low-intensity obstacle lights, Type B.

6.2.3.24 Where an object is indicated by medium-intensity obstacle lights, Type A, and the top of the object is more than 105 m above the level of the surrounding ground or the elevation of tops of nearby buildings (when the object to be marked is surrounded by buildings), additional lights shall be provided at intermediate levels. These additional intermediate lights shall be spaced as equally as practicable, between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 105 m.

6.2.3.25 Where an object is indicated by medium-intensity obstacle lights, Type B, and the top of the object is more than 45 m above the level of the surrounding ground or the elevation of tops of nearby buildings (when the object to be marked is surrounded by buildings), additional lights shall be provided at intermediate levels. These additional intermediate lights shall be alternately low-intensity obstacle lights, Type B, and medium-intensity obstacle lights, Type B, and shall be spaced as equally as practicable between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 52 m.

6.2.3.26 Where an object is indicated by medium-intensity obstacle lights, Type C, and the top of the object is more than 45 m above the level of the surrounding ground or the elevation of tops of nearby buildings (when the object to be marked is surrounded by buildings), additional lights shall be provided at intermediate levels. These additional intermediate lights shall be spaced as equally as practicable, between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 52 m.

6.2.3.27 Where high-intensity obstacle lights, Type A, are used, they shall be spaced at uniform intervals not exceeding 105 m between the ground level and the top light(s) specified in 6.2.3.10, except that where an object to be marked is surrounded by buildings, the elevation of the tops of the buildings may be used as the equivalent of the ground level when determining the number of light levels.

#### **Lighting of objects with a height 150 m or more above ground level**

6.2.3.28 High-intensity obstacle lights, Type A, shall be used to indicate the presence of an object if its height above the level of the surrounding ground exceeds 150 m and an aeronautical study indicates such lights to be essential for the recognition of the object by day.

6.2.3.29 Where high-intensity obstacle lights, Type A, are used, they shall be spaced at uniform intervals not exceeding 105 m between the ground level and the top light(s) specified in 6.2.3.10, except that where an object to be marked is surrounded by buildings, the elevation of the tops of the buildings may be used as the equivalent of the ground level when determining the number of light levels.

6.2.3.30 Where, in the opinion of PACA, the use of high-intensity obstacle lights, Type A, at night may dazzle pilots in the vicinity of an aerodrome (within approximately 10 000 m radius) or cause significant environmental concerns, medium-intensity obstacle lights, Type C, shall be used alone, whereas medium intensity obstacle lights, Type B, shall be used either alone or in combination with low-intensity obstacle lights, Type B.

6.2.3.31 Where an object is indicated by medium-intensity obstacle lights, Type A, additional lights shall be provided at intermediate levels. These additional intermediate lights shall be spaced as equally as practicable, between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 105 m.

6.2.3.32 Where an object is indicated by medium-intensity obstacle lights, Type B, additional lights shall be provided at intermediate levels. These additional intermediate lights shall be

alternately low-intensity obstacle lights, Type B, and medium-intensity obstacle lights, Type B, and shall be spaced as equally as practicable between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 52 m.

6.2.3.33 Where an object is indicated by medium-intensity obstacle lights, Type C, additional lights shall be provided at intermediate levels. These additional intermediate lights shall be spaced as equally as practicable, between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 52 m.

## 6.2.4 Wind turbines

6.2.4.1 A wind turbine shall be marked and/or lighted if it is determined to be an obstacle.

**Note 1:** *Additional lighting or markings may be provided where in the opinion of PACA such lighting or markings are deemed necessary.*

**Note2:** *see 4.3.1 and 4.3.2*

### Markings

6.2.4.2 The rotor blades, nacelle and upper 2/3 of the supporting mast of wind turbines shall be painted white, unless otherwise indicated by an aeronautical study.

### Lighting

6.2.4.3 When lighting is deemed necessary in the case of a wind farm, i.e. a group of two or more wind turbines, the wind farm shall be regarded as an extensive object and the lights shall be installed:

- a) To identify the perimeter of the wind farm;
- b) Respecting the maximum spacing, in accordance with 6.2.3.15, between the lights along the perimeter, unless a dedicated assessment shows that a greater spacing can be used;
- c) So that, where flashing lights are used, they flash simultaneously throughout the wind farm;
- d) So that, within a wind farm, any wind turbines of significantly higher elevation are also identified wherever they are located; and
- e) At locations prescribed in a), b) and d), respecting the following criteria:
  - i. *For wind turbines of less than 150 m in overall height (hub height plus vertical blade height), medium intensity lighting on the nacelle should be provided;*
  - ii. *For wind turbines from 150 m to 315 m in overall height, in addition to the medium intensity light installed on the nacelle, a second light serving as an alternate should*

- be provided in case of failure of the operating light. The lights should be installed to assure that the output of either light is not blocked by the other; and*
- iii. *In addition, for wind turbines from 150 m to 315 m in overall height, an intermediate level at half the nacelle height of at least 3 low intensity Type E lights, as specified in 6.2.1.3 should be provided. If an aeronautical study shows that low intensity type E lights are not suitable, low-intensity type A or B lights may be used.*

**Note:** *The above 6.2.4.3 e) does not address wind turbines of more than 315 m of overall height. For such wind turbines, additional marking and lighting may be required as determined by an aeronautical study.*

6.2.4.4 The obstacle lights shall be installed on the nacelle in such a manner as to provide an unobstructed view for aircraft approaching from any direction.

6.2.4.5 Where lighting is deemed necessary for a single wind turbine or short line of wind turbines, the installation should be in accordance with 6.2.4.3(e) or as determined by an aeronautical study.

## 6.2.5 Overhead wires, cables, etc., and supporting towers

### Marking

6.2.5.1 The wires, cables, etc., to be marked shall be equipped with markers; the supporting tower shall be coloured.

### Marking by colours

6.2.5.2 The supporting towers of overhead wires, cables, etc., that require marking shall be marked in accordance with 6.2.3.1 to 6.2.3.4, except that the marking of the supporting towers may be omitted when they are lighted by high-intensity obstacle lights by day.

### Marking by markers

6.2.5.3 Markers displayed on or adjacent to objects shall be located in conspicuous positions so as to retain the general definition of the object and shall be recognizable in clear weather from a distance of at least 1 000 m for an object to be viewed from the air and 300 m for an object to be viewed from the ground in all directions in which an aircraft is likely to approach the object. The shape of markers shall be distinctive to the extent necessary to ensure that they are not mistaken for markers employed to convey other information, and they shall be such that the hazard presented by the object they mark is not increased.

6.2.5.4 A marker displayed on an overhead wire, cable, etc., shall be spherical and have a diameter of not less than 60 cm.

6.2.5.5 The spacing between two consecutive markers or between a marker and a supporting tower shall be appropriate to the diameter of the marker, but in no case shall the spacing exceed:

- a) 30 m where the marker diameter is 60 cm progressively increasing with the diameter of the marker to
- b) 35 m where the marker diameter is 80 cm and further progressively increasing to a maximum of
- c) 40 m where the marker diameter is of at least 130 cm.

Where multiple wires, cables, etc., are involved, a marker shall be located not lower than the level of the highest wire at the point marked.

6.2.5.6 A marker shall be of one colour. When installed, white and red, or white and orange markers shall be displayed alternately. The colour selected shall contrast with the background against which it will be seen.

6.2.5.7 When it has been determined that an overhead wire, cable, etc., needs to be marked but it is not practicable to install markers on the wire, cable, etc., then high-intensity obstacle lights, Type B, shall be provided on their supporting towers.

## Lighting

6.2.5.8 High-intensity obstacle lights, Type B, shall be used to indicate the presence of a tower supporting overhead wires, cables, etc., where:

- a) An aeronautical study indicates such lights to be essential for the recognition of the presence of wires, cables, etc.; or
- b) It has not been found practicable to install markers on the wires, cables, etc.

6.2.5.9 Where high-intensity obstacle lights, Type B, are used, they shall be located at three levels:

- At the top of the tower;
- At the lowest level of the catenary of the wires or cables; and
- At approximately midway between these two levels.

**Note:** *In some cases, this may require locating the lights off the tower.*

6.2.5.10 High-intensity obstacle lights, Type B, indicating the presence of a tower supporting overhead wires, cables, etc., shall flash sequentially; first the middle light, second the top light and last, the bottom light. The intervals between flashes of the lights shall approximate the following ratios:

Flash interval between	Ratio of cycle time
middle and top light	1/13
top and bottom light	2/13

bottom and middle light

10/13

**Note:** High intensity obstacle lights are intended for day use as well as night use. Care is needed to ensure that these lights do not create disconcerting dazzle. Guidance on the design, operation and the location of high-intensity obstacle lights is given in the Aerodrome Design Manual (Doc 9157), Part 4.

6.2.5.11 Where, in the opinion of PACA, the use of high-intensity obstacle lights, Type B, at night may dazzle pilots in the vicinity of an aerodrome (within approximately 10 000 m radius) or cause significant environmental concerns, a dual obstacle lighting system shall be provided. This system shall be composed of high-intensity obstacle lights, Type B, for daytime and twilight use and medium-intensity obstacle lights, Type B, for nighttime use. Where medium-intensity lights are used they shall be installed at the same level as the high-intensity obstacle light Type B.

6.2.5.12 The installation setting angles for high-intensity obstacle lights, Type B, shall be in accordance with Table 6-5.

**Table 6-5. Installation setting angles for high-intensity obstacle lights**

Height of light unit above terrain (AGL)		Angle of the peak of the beam above the horizontal
Greater than	Not exceeding	
151 m		0°
122 m	151 m	1°
92 m	122 m	2°
	92 m	3°

## CHAPTER 7 - VISUAL AIDS FOR DENOTING RESTRICTED USE AREAS

### 7.1 Closed runways and taxiways, or parts thereof

#### Application

7.1.1 A closed marking or elevated illuminated sign shall be displayed on a runway or taxiway or portion thereof which is permanently closed to the use of all aircraft.

7.1.2 A closed marking or elevated illuminated sign shall be displayed on a temporarily closed runway or taxiway or portion thereof, except that such marking may be omitted when the closing is of short duration and adequate warning by air traffic services is provided.

#### Location

7.1.3 On a runway a closed marking or elevated illuminated sign shall be placed at each end of the runway, or portion thereof, declared closed, and additional markings shall be so placed that the maximum interval between markings does not exceed 300 m. On a taxiway a closed marking shall be placed at least at each end of the taxiway or portion thereof closed.

#### Characteristics

7.1.4 The closed marking or elevated illuminated sign shall be of the form and proportions as detailed in (Figure 7-1, Illustration a), when displayed on a runway, and shall be of the form and proportions as detailed in (Figure 7-1, Illustration b), when displayed on a taxiway. The marking shall be white when displayed on a runway and shall be yellow when displayed on a taxiway.

**Note:** When an area is temporarily closed, frangible barriers or markings utilizing materials other than paint or other suitable means such as an elevated X illuminated with white unidirectional lights may be used to identify the closed area and shall be as per Figure 7-2 & Figure 7-3

7.1.5 When a runway or taxiway or portion thereof is permanently closed, all normal runway and taxiway markings shall be obliterated.

7.1.6 Lighting on a closed runway or taxiway or portion thereof shall not be operated, except as required for maintenance purposes, and on a permanently closed runway the lighting shall be removed.


7.1.7 In addition to closed markings, when the runway or taxiway or portion thereof closed is intercepted by a usable runway or taxiway which is used at night, unserviceability lights shall be placed across the entrance to the closed area at intervals not exceeding 3 m (see 7.4.4).

## 7.2 Non-load-bearing surfaces

### Application


7.2.1 Shoulders for taxiways, runway turn pads, holding bays and aprons and other non-load-bearing surfaces which cannot readily be distinguished from load-bearing surfaces and which, if used by aircraft, might result in damage to the aircraft shall have the boundary between such areas and the load-bearing surface marked by a taxi side stripe marking.

**Note:** The marking of runway sides is specified in 5.2.7.

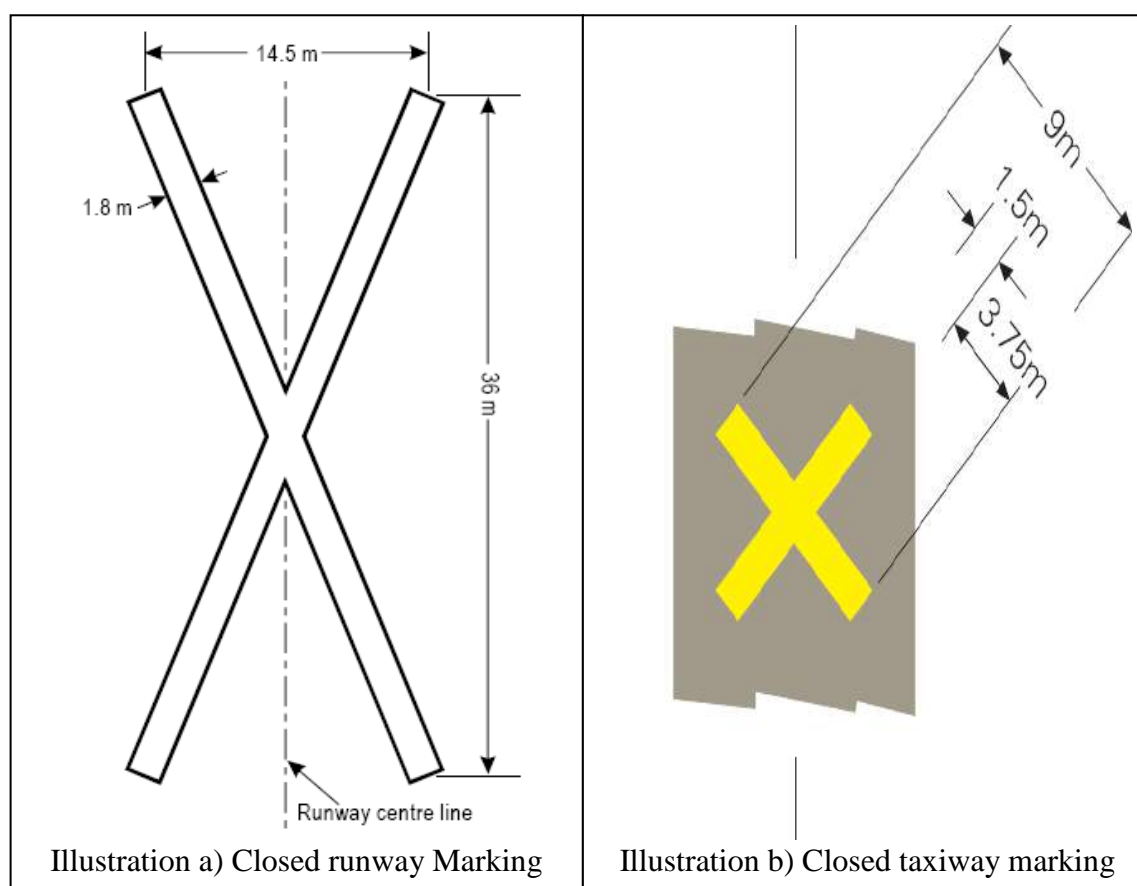

**Figure 7-1. Closed runway and taxiway markings**



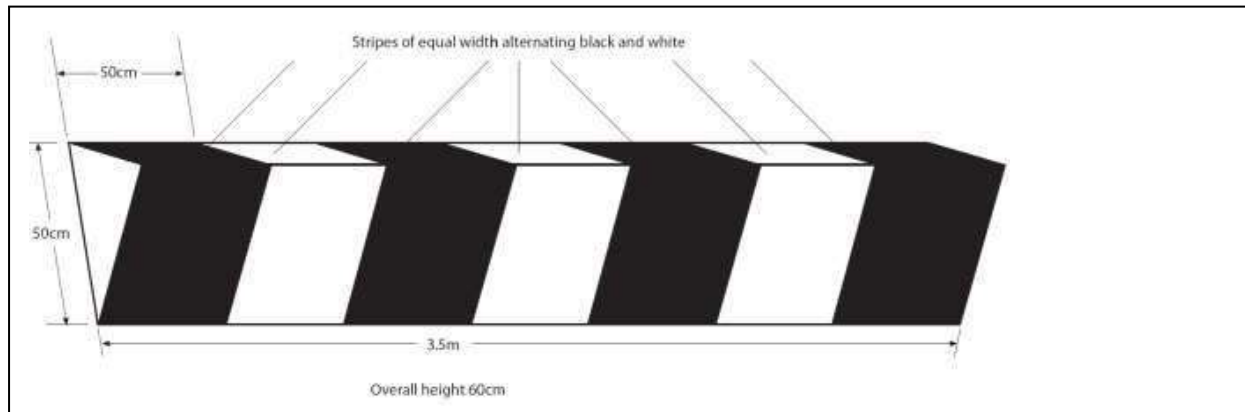

**Figure 7-2. Temporary threshold marker board**



**Figure 7-3. Figure A7-4 Illuminated white X**

## Location

7.2.2 A taxi side stripe marking shall be placed along the edge of the load-bearing pavement, with the outer edge of the marking approximately on the edge of the load-bearing pavement.

## Characteristics

7.2.3 A taxi side stripe marking shall consist of a pair of solid lines, each 15 cm wide and spaced 15 cm apart and the same colour as the taxiway centre line marking.

**Note:** Guidance on providing additional transverse stripes at an intersection or a small area on the apron is given in the Aerodrome Design Manual (Doc 9157), Part 4.

## 7.3 Pre-threshold area

### Application


7.3.1 When the surface before a threshold is paved and exceeds 60 m in length and is not suitable for normal use by aircraft, the entire length before the threshold shall be marked with a chevron marking.

### Location

7.3.2 A chevron marking shall point in the direction of the runway and be placed as shown in Figure 7-4.

### Characteristics

7.3.3 A chevron marking shall be yellow. It shall have an overall width of at least 0.9 m

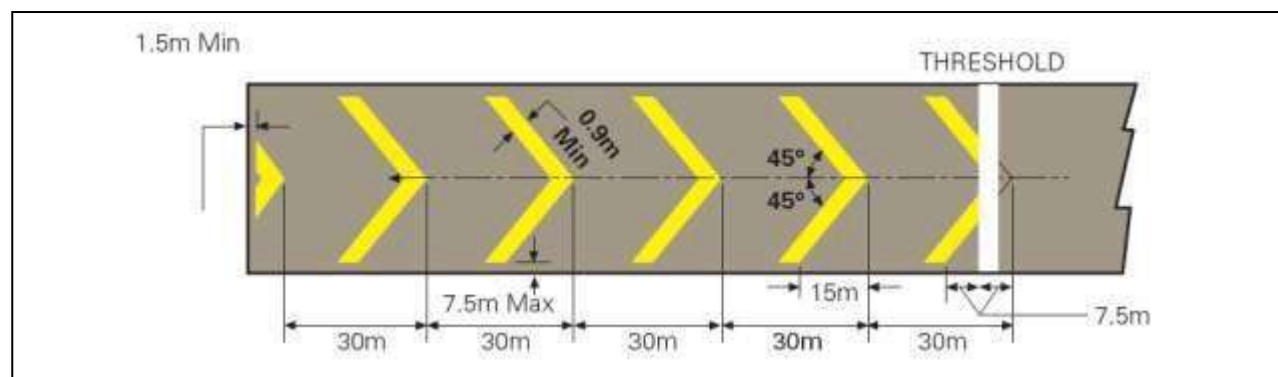

**Figure 7-4. Pre-threshold marking**

## 7.4 Unserviceable areas

### Application

- 7.1.1** Unserviceability markers shall be displayed wherever any portion of a taxiway, apron or holding bay is unfit for the movement of aircraft but it is still possible for aircraft to bypass the area safely. On a movement area used at night, unserviceability lights shall be used.

***Note:** Unserviceability markers and lights are used for such purposes as warning pilots of a hole in a taxiway or apron pavement or outlining a portion of pavement, such as on an apron, that is under repair. They are not suitable for use when a portion of a runway becomes unserviceable, nor on a taxiway when a major portion of the width becomes unserviceable. In such instances, the runway or taxiway is normally closed.*

### Location

- 7.1.2** Unserviceability markers and lights shall be placed at intervals sufficiently close so as to delineate the unserviceable area.

***Note:** Guidance on the location of unserviceability lights is given in Attachment A, Section 14.*

### Characteristics of unserviceability markers

- 7.1.3** Unserviceability markers shall consist of conspicuous upstanding devices such as flags, cones or marker boards.

### Characteristics of unserviceability lights

- 7.1.4** An unserviceability light shall consist of a red fixed light. The light shall have an intensity sufficient to ensure conspicuity considering the intensity of the adjacent lights and the general level of illumination against which it would normally be viewed. In no case shall the intensity be less than 10 cd of red light.

### Characteristics of unserviceability cones

- 7.1.5** An unserviceability cone shall be at least 0.5 m in height and red, orange or yellow or any one of these colours in combination with white.

### Characteristics of unserviceability flags

- 7.1.6** An unserviceability flag shall be at least 0.5 m square and red, orange or yellow or any one of these colours in combination with white.

### Characteristics of unserviceability marker boards

- 7.1.7** An unserviceability marker board shall be at least 0.5 m in height and 0.9 m in length, with alternate red and white or orange and white vertical stripes.

## CHAPTER 8 - ELECTRICAL SYSTEMS

### 8.1 Electrical power supply systems for air navigation facilities

**Introductory Note.** — *The safety of operations at aerodromes depends on the quality of the supplied power. The total electrical power supply system may include connections to one or more external sources of electric power supply, one or more local generating facilities and to a distribution network including transformers and switchgear. Many other aerodrome facilities supplied from the same system need to be taken into account while planning the electrical power system at aerodromes.*

**8.1.1** Adequate primary power supply shall be available at aerodromes for the safe functioning of air navigation facilities.

**8.1.2** The design and provision of electrical power systems for aerodrome visual and radio navigation aids shall be such that an equipment failure will not leave the pilot with inadequate visual and non-visual guidance or misleading information.

**Note:** *The design and installation of the electrical systems need to take into consideration factors that can lead to malfunction, such as electromagnetic disturbances, line losses, power quality, etc. Additional guidance is given in the Aerodrome Design Manual (Doc 9157), Part 5.*

**8.1.3** Electric power supply connections to those facilities for which secondary power is required shall be so arranged that the facilities are automatically connected to the secondary power supply on failure of the primary source of power.

**8.1.4** The time interval between failure of the primary source of power and the complete restoration of the services required by 8.1.10 shall be as short as practicable, except that for visual aids associated with non-precision, precision approach or take-off runways the requirements of Table 8-1 for maximum switch-over times shall apply.

**Note:** *A definition of switch-over time is given in Chapter 1.*

**8.1.5** Not Applicable

#### Visual aids

#### Application

**8.1.6** For a precision approach runway, a secondary power supply capable of meeting the requirements of Table 8-1 for the appropriate category of precision approach runway shall be provided. Electric power supply connections to those facilities for which secondary power is required shall be so arranged that the facilities are automatically connected to the secondary power supply on failure of the primary source of power.

- 8.1.7** For a runway meant for take-off in runway visual range conditions less than a value of 800m, a secondary power supply capable of meeting the relevant requirements of Table 8-1 shall be provided
- 8.1.8** At an aerodrome where the primary runway is a non-precision approach runway, a secondary power supply capable of meeting the requirements of Table 8-1 shall be provided except that a secondary power supply for visual aids need not be provided for more than one non-precision approach runway.
- 8.1.9** At an aerodrome where the primary runway is a non-instrument runway, a secondary power supply capable of meeting the requirements of 8.1.4 shall be provided, except that a secondary power supply for visual aids need not be provided when an emergency lighting system in accordance with the specification of 5.3.2 is provided and capable of being deployed in 15 minutes.
- 8.1.10** The following aerodrome facilities shall be provided with a secondary power supply capable of supplying power when there is a failure of the primary power supply:
- The signalling lamp and the minimum lighting necessary to enable air traffic services personnel to carry out their duties;

**Note:** *The requirement for minimum lighting may be met by other than electrical means.*

- All obstacle lights which, in the opinion of PACA, are essential to ensure the safe operation of aircraft;
- Approach, runway and taxiway lighting as specified in 8.1.6 to 8.1.9;
- Meteorological equipment;
- Essential security lighting, if provided in accordance with 9.11;
- Essential equipment and facilities for the aerodrome responding emergency agencies;
- Floodlighting on a designated isolated aircraft parking position if provided in accordance with 5.3.23.1;
- Illumination of apron areas over which passengers may walk.
- RFFS and other emergency alerting and communication systems

**Note:** *Specifications for secondary power supply for radio navigation aids and ground elements of communications systems are given in Annex 10, Volume 1, Chapter 2. annex 10, volume 1,*

- 8.1.11** Requirements for a secondary power supply shall be met by either of the following:
- Independent public power, which is a source of power supplying the aerodrome service from a substation other than the normal substation through a transmission line following a route different from the normal power supply route and such that the possibility of a

simultaneous failure of the normal and independent public power supplies is extremely remote; or

- Standby power unit(s), which are engine generators, batteries, etc., from which electric power can be obtained.

**Note:** Guidance on electrical systems is included in the Aerodrome Design Manual (Doc 9157), Part 5.

**Table 8-1. Secondary Power Supply Requirement**

Runway type	Visual aids (lighting) requiring power	Maximum switchover time
Non-instrument	Visual approach slope indicators (a) Runway edge (b) Runway threshold c (b) Runway end (b) Obstacle (a)	See 8.1.4 and 8.1.9
Non-precision approach	Approach lighting system Visual approach slope indicators (a) (d) Runway edge (d) Runway threshold (d) Runway end Obstacle (a)	15 seconds 15 seconds 15 seconds 15 seconds 15 seconds 15 seconds
Precision approach category I	Approach lighting system Runway edge (d) Visual Approach Slope Indicators (a) (d) Runway threshold (d) Runway end Essential taxiway (a) Obstacle (a)	15 seconds 15 seconds 15 seconds 15 seconds 15 seconds 15 seconds 15 seconds
Precision approach category II & III	Inner 300 m of the approach lighting system Other part of the approach lighting barrettes Obstacle a Runway edge Runway threshold Runway end Runway centre line Runway touchdown zone All stop bars Essential taxiway	1 second 15 second 15 seconds 15 seconds 1 second 1 second 1 second 1 second 1 second 1 second 15 seconds
Take-off runway intended for use in runway visual range conditions less than a value of the order of 800 m (2600 ft).	Runway edge Runway end Runway centre line All stop bars Essential taxiway (a) Obstacle (a)	15 seconds (c) 1 second 1 second 1 second 15 seconds 15 seconds

Note (a) - Supplied with secondary power when their operation is essential to the safety of flight operation.

Note (b) - See Chapter 5, 5.3.2, regarding the use of emergency lighting.

Note (c) - One second where no runway centre line lights are provided.

Note (d) – One Second where approaches are over hazardous or precipitous terrain

## 8.2 System design

**8.2.1** For a runway meant for use in runway visual range conditions less than a value of 550 m, the electrical systems for the power supply, lighting and control of the lighting systems included in Table 8-1 shall be so designed that an equipment failure will not leave the pilot with inadequate visual guidance or misleading information.

**Note:** *Guidance on means of providing this protection is given in the Aerodrome Design Manual (Doc 9157), Part 5.*

**8.2.2** Where the secondary power supply of an aerodrome is provided by the use of duplicate feeders, such supplies shall be physically and electrically separate so as to ensure the required level of availability and independence.

**8.2.3** Where a runway forming part of a standard taxi-route is provided with runway lighting and taxiway lighting, the lighting systems shall be interlocked to preclude the possibility of simultaneous operation of both forms of lighting

## 8.3 Monitoring

**Note:** *Guidance on this subject is given in the Aerodrome Design Manual (Doc 9157), Part 5.*

**8.3.1** A system of monitoring shall be employed to indicate the operational status of the lighting systems.

**8.3.2** Where lighting systems are used for aircraft control purposes, such systems shall be monitored automatically so as to provide an indication of any fault which may affect the control functions. This information shall be automatically relayed to the air traffic service unit.

**8.3.3** Where a change in the operational status of lights has occurred, an indication shall be provided within two seconds for a stop bar at a runway-holding position and within five seconds for all other types of visual aids.

**8.3.4** For a runway meant for use in runway visual range conditions less than a value of 550 m, the lighting systems detailed in Table 8-1 shall be monitored automatically so as to provide an indication when the serviceability level of any element falls below the minimum serviceability level specified in 10.5.7 to 10.5.11, as appropriate. This information shall be automatically relayed to the air traffic services unit.

**8.3.5** For a runway meant for use in runway visual range conditions less than a value of 550 m, the lighting systems detailed in Table 8-1 shall be monitored automatically to provide an

indication when the serviceability level of any element falls below the minimum level specified by PACA below which operations shall not continue. This information shall be automatically relayed to the air traffic services unit and displayed in a prominent position.

**Note:** *Guidance on air traffic control interface and visual aids monitoring is included in the Aerodrome Design Manual (Doc 9157)*



## CHAPTER 9. AERODROME OPERATIONAL SERVICES, EQUIPMENT AND INSTALLATIONS

### 9.1 Aerodrome emergency planning

#### General

**Introductory Note.** — Aerodrome emergency planning is the process of preparing an aerodrome to cope with an emergency occurring at the aerodrome or in its vicinity. The objective of aerodrome emergency planning is to minimize the effects of an emergency, particularly in respect of saving lives and maintaining aircraft operations. The aerodrome emergency plan sets forth the procedures for coordinating the response of different aerodrome agencies (or services) and of those agencies in the surrounding community that could be of assistance in responding to the emergency. Guidance material to assist the appropriate authority in establishing aerodrome emergency planning is given in the Airport Services Manual (Doc 9137), Part 7.

9.1.1 The Aerodrome Operator shall establish an aerodrome emergency at an aerodrome, commensurate with the aircraft operations and other activities conducted at the aerodrome.

9.1.2 The aerodrome emergency plan shall provide for the coordination of the actions to be taken in an emergency occurring at an aerodrome or in its vicinity.

**Note 1:** Examples of emergencies are: aircraft emergencies, sabotage including bomb threats, unlawfully seized aircraft, dangerous goods occurrences, building fires, natural disaster and public health emergencies.

**Note 2:** Examples of public health emergencies are increased risk of travellers or cargo spreading a serious communicable disease internationally through air transport and severe outbreak of a communicable disease potentially affecting a large proportion of aerodrome staff.

9.1.3 The plan shall coordinate the response or participation of all existing agencies which, in the opinion of PACA, could be of assistance in responding to an emergency.

**Note 1:** Examples of agencies are:

- On the aerodrome: air traffic control units, rescue and firefighting services, aerodrome administration, medical and ambulance services, aircraft operators, security services, and police;
- Off the aerodrome: fire departments, police, health authorities (including medical, ambulance, hospital and public health services), military, and harbour patrol or coast guard.

**Note 2:** Public health services include planning to minimize adverse effects to the community from health-related events and deal with population health issues rather than provision of health services to individuals.

9.1.4 The plan shall provide for cooperation and coordination with the rescue coordination centre, as necessary.

9.1.5 The aerodrome emergency plan document shall include at least the following:

- a) Types of emergencies planned for;
- b) Agencies involved in the plan;
- c) Responsibility and role of each agency, the emergency operations centre and the command post, for each type of emergency;
- d) Information on names and telephone numbers of offices or people to be contacted in the case of a particular emergency; and
- e) A grid map of the aerodrome and its immediate vicinity.

9.1.6 The plan shall observe Human Factors principles to ensure optimum response by all existing agencies participating in emergency operations.

**Note:** *Guidance material on Human Factors principles can be found in the Human Factors Training Manual (Doc 9683).*

### **Emergency Operations Centre (EOC) and command post**

9.1.7 An aerodrome operator shall ensure a fixed emergency operations centre is available for use during an emergency, meeting the following criteria:

- a) Be a part of the aerodrome facilities and shall be responsible for the overall coordination and general direction of the response to an emergency
- b) Unless approved by PACA, the EOC shall be located in a position that allows the EOC to be inside a controlled airside area, while maintaining relative ease of access by off-airport or heliport supporting agencies' staff and equipment. Access to the approaches to the EOC, and the EOC itself shall be strictly controlled during an emergency to ensure that only authorized personnel and equipment, required to respond to a major security emergency, are allowed access
- c) The location of the emergency operations centre shall provide a clear view of the movement area and isolated aircraft parking position, wherever possible.
- d) Adequate communication systems linking the mobile command post and the emergency operations centre with each other, and with the participating agencies shall be provided in accordance with the airport or heliport emergency plan, and consistent with the particular requirements of the aerodrome.
- e) A person shall be assigned to assume control of the emergency operations centre

9.1.8 An aerodrome operator shall ensure a mobile command post is available for use during an emergency. In the simpler emergency responses this mobile command post requirement might be met by a standard vehicle such as the fire officer's, but with police and airline and/or aerodrome operations representatives meeting at the vehicle. However, once a full AEP response is called for, a suitable mobile command post as described in this Regulation must be brought into use meeting the following criteria:

- a) Be a facility capable of being moved rapidly to the site of an emergency, when required, and shall undertake the local coordination of those agencies responding to the emergency. Maps, charts, and other relevant equipment and information shall be immediately available at the mobile command post
- b) The airport or heliport emergency plan shall provide for the mobile command post to be positioned to provide a clear view of the incident site and its environs, wherever possible
- c) The mobile command post shall be readably visible and easily recognizable and distinguishable by provision of an elevated marker and/or light
- d) The mobile command post shall contain the necessary equipment and personnel to communicate with all agencies involved in the emergency, including the emergency operations centre, in accordance with the airport or heliport emergency plan and consistent with the particular requirements of the aerodrome. The volume of noise shall be reduced by utilizing headsets or sound absorbent partitions for each participant. The communication and electronic devices shall be checked at least each month
- e) A person, normally the aerodrome or heliport operator's on-scene commander, shall be assigned to assume control of the mobile command post

### **Communication system**

9.1.9 An aerodrome or heliport operator shall ensure that an adequate communication systems linking the command post and the emergency operations centre with each other and with the participating agencies is provided in accordance with the airport or heliport emergency plan and consistent with the particular requirements of the aerodrome.

### **Aerodrome emergency exercise**

9.1.10 The emergency plan shall contain procedures for periodic testing of the adequacy of the plan and for reviewing the results in order to improve its effectiveness.

An aerodrome operator shall submit the scenario for the full scale emergency exercise to PACA for approval 90 days before the proposed date of the exercise.

**Note:** *The plan includes all participating agencies and associated equipment.*

9.1.11 The plan shall be tested by conducting:

- a) Full-scale aerodrome or exercise at intervals not exceeding two years; and

- b) Partial emergency exercises in the intervening year to ensure that any deficiencies found during the full-scale aerodrome exercise have been corrected;
- c) A series of modular test commencing in the first year and concluding in a full scale aerodrome emergency exercise at intervals not exceeding three years.

And debrief / reviewed thereafter, or after an actual emergency, so as to correct any deficiency found during such exercises or actual emergency.

**Note 1:** *The purpose of a full-scale exercise is to ensure the adequacy of the plan to cope with different types of emergencies. The purpose of a partial exercise is to ensure the adequacy of the response to individual participating agencies and components of the plan, such as the communications system. The purpose of modular tests is to enable concentrated effort on specific components of established emergency plans.*

**Note 2:** *Guidance material on airport emergency planning is available in the Airport Services Manual (Doc 9137), Part 7*

### **Emergencies in difficult environments**

9.1.12 The plan shall include the ready availability of, and coordination with, appropriate specialist rescue services to be able to respond to emergencies where an aerodrome is located close to water and/or swampy areas and where a significant portion of approach or departure operations takes place over these areas.

9.1.13 At those aerodromes located close to water and/or swampy areas, or difficult terrain, the aerodrome emergency plan shall include the establishment, testing and assessment at regular intervals of a predetermined response for the specialist rescue services.

9.1.14 An assessment of the approach and departure areas within 1 000 m of the runway threshold shall be carried out to determine the options available for intervention.

*Note.— Guidance material on assessing approach and departure areas within 1 000 m of runway thresholds can be found in Chapter 13 of the Airport Services Manual (Doc 9137), Part 1.*

## 9.2 Rescue and fire fighting

### General

**Introductory Note.** — *The principal objective of a rescue and firefighting service is to save lives in the event of an aircraft accident or incident occurring at, or in the immediate vicinity of, an aerodrome. The rescue and firefighting service is provided to create and maintain survivable conditions, to provide egress routes for occupants and to initiate the rescue of those occupants unable to make their escape without direct aid. The rescue may require the use of equipment and personnel other than those assessed primarily for rescue and firefighting purposes.*

*The most important factors bearing on effective rescue in a survivable aircraft accident are: the training received, the effectiveness of the equipment and the speed with which personnel and equipment designated for rescue and firefighting purposes can be put into use.*

*Requirements to combat building and fuel farm fires, or to deal with foaming of runways, are not taken into account.*

### Application

9.2.1 Rescue and firefighting equipment and services shall be provided at an aerodrome.

**Note:** *Public or private organizations, suitably located and equipped, may be designated to provide the rescue and firefighting service. It is intended that the fire station housing these organizations be normally located on the aerodrome, although an off-aerodrome location is not precluded provided the response time can be met.*

9.2.2 Where an aerodrome is located close to water/swampy areas, or difficult terrain, and where a significant portion of approach or departure operations takes place over these areas, specialist rescue services and firefighting equipment appropriate to the hazard and risk shall be available.

**Note 1:** *Special firefighting equipment need not be provided for water areas; this does not prevent the provision of such equipment if it would be of practical use, such as when the areas concerned include reefs or islands.*

**Note 2:** *The objective is to plan and deploy the necessary life-saving flotation equipment as expeditiously as possible in a number commensurate with the largest aeroplane normally using the aerodrome.*

**Note 3:** *Additional guidance is available in Chapter 13 of the Airport Services Manual (Doc 9137), Part 1.*

## Level of protection to be provided

9.2.3 Not applicable

9.2.4 No applicable

9.2.5 The aerodrome category shall be determined from Table 9-1 and shall be based on the longest aeroplanes normally using the aerodrome and their fuselage width.

**Note:** To categorize the aeroplanes using the aerodrome, first evaluate their overall length and second, their fuselage width.

9.2.6 If, after selecting the category appropriate to the longest aeroplane's overall length, that aeroplane's fuselage width is greater than the maximum width in Table 9-1, column 3, for that category, then the category for that aeroplane shall actually be one category higher.

9.2.7 During anticipated periods of reduced activity, the level of protection available shall be no less than that needed for the highest category of aeroplane planned to use the aerodrome during that time irrespective of the number of movements.

Aerodrome Category	Aeroplane overall length	Maximum fuselage Width
1	0 m up to but not including 9 m	2 m
2	9 m up to but not including 12 m	2 m
3	12 m up to but not including 18 m	3 m
4	18 m up to but not including 24 m	4 m
5	24 m up to but not including 28 m	4 m
6	28 m up to but not including 39 m	5 m
7	39 m up to but not including 49 m	5 m
8	49 m up to but not including 61 m	7 m
9	61 m up to but not including 76 m	7 m
10	76 m up to but not including 90 m	8 m

**Table 9-1. Aerodrome Category for rescue and fire fighting**

## Extinguishing agents

9.2.8 Both principal and complementary agents shall be provided at an aerodrome.

**Note:** Descriptions of the agents may be found in the Airport Services Manual (Doc 9137), Part I.

9.2.9 The principal extinguishing agent shall be:

- a. A foam meeting the minimum performance level A; or
- b. A foam meeting the minimum performance level B; or
- c. A foam meeting the minimum performance level C; or
- d. A combination of these agents;

Except that the principal extinguishing agent for aerodromes in categories 1 to 3 shall preferably meet the minimum performance level B or C foam.

**Note:** *Information on the required physical properties and fire extinguishing performance criteria needed for a foam to achieve an acceptable performance level A or B rating is given in the Airport Services Manual (Doc 9137), Part 1.*

9.2.10 The complementary extinguishing agent shall be a dry chemical powder suitable for extinguishing hydrocarbon fires.

**Note 1:** *When selecting dry chemical powders for use with foam, care must be exercised to ensure compatibility.*

**Note 2:** *Alternate complementary agents having equivalent firefighting capability may be utilized. Additional information on extinguishing agents is given in the Airport Services Manual (Doc 9137), Part 1.*

9.2.11 The amounts of water for foam production and the complementary agents to be provided on the rescue and fire fighting vehicles shall be in accordance with the aerodrome category determined under 9.2.5, 9.2.6 and Table 9-2, except that for aerodrome categories 1 and 2 up to 100 per cent of the water may be substituted by complementary agent.

For the purpose of agent substitution, 1 kg of complementary agent shall be taken as equivalent to 1.0 L of water for production of a foam meeting performance level A.

**Note 1:** *The amounts of water specified for foam production are predicated on an application rate of 8.2 L/min/m<sup>2</sup> for a foam meeting performance level A, 5.5 L/min/m<sup>2</sup> for a foam meeting performance level B and 3.75 L/min/m<sup>2</sup> for a foam meeting performance level C.*

**Note 2:** *When any other complementary agent is used, the substitution ratios need to be checked.*

9.2.12 At aerodromes where operations by aeroplanes larger than the average size in a given category are planned, the quantities of water shall be recalculated and the amount of water for foam production and the discharge rates for foam solution shall be increased accordingly.

**Note:** *Guidance on the determination of quantities of water and discharge rates based on the largest theoretical aeroplane in a given category is available in Chapter 2 of the Airport Services Manual (Doc 9137), Part 1.*

9.2.13 The quantity of foam concentrates separately provided on vehicles for foam production shall be in proportion to the quantity of water provided and the foam concentrate selected

**Note:** Guidance on the determination of quantities of water and discharge rates based on the largest overall length of aeroplane in a given category is available in Chapter 2 of the Airport Services Manual (Doc 9137), Part 1.

Aerodrome category	Foam meeting performance level A		Foam meeting performance level B		Foam meeting performance level C		Complementary agents	
	Water (L)	Discharge rate foam solution/minute (L)	Water (L)	Discharge rate foam solution/minute (L)	Water (L)	Discharge rate foam solution/minute (L)	Dry chemical powders (kg)	Discharge Rate (kg/second)
		(3)		(5)		(7)		
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
1	350	350	230	230	160	160	45	2.25
2	1 000	800	670	550	460	360	90	2.25
3	1 800	1 300	1 200	900	820	630	135	2.25
4	3 600	2 600	2 400	1 800	1 700	1 100	135	2.25
5	8 100	4 500	5 400	3 000	3 900	2 200	180	2.25
6	11 800	6 000	7 900	4 000	5 800	2 900	225	2.25
7	18 200	7 900	12 100	5 300	8 800	3 800	225	2.25
8	27 300	10 800	18 200	7 200	12 800	5 100	450	4.5
9	36 400	13 500	24 300	9 000	17 100	6 300	450	4.5
10	48 200	16 600	32 300	11 200	22 800	7 900	450	4.5

Note.— The quantities of water shown in columns 2, 4 and 6 are based on the average overall length of aeroplanes in a given category.

**Table 9-2. Minimum usable amounts of extinguishing agents for foam performance levels**

9.2.14 The amount of foam concentrate provided on a vehicle shall be sufficient to produce at least two loads of foam solution.

9.2.15 Supplementary water supplies, for the expeditious replenishment of rescue and firefighting vehicles at the scene of an aircraft accident, shall be provided.

9.2.16 When a combination of different performance level foams are provided at an aerodrome, the total amount of water to be provided for foam production shall be calculated for each foam type and the distribution of these quantities shall be documented for each vehicle and applied to the overall rescue and firefighting requirement.

9.2.17 The discharge rate of the foam solution shall not be less than the rates shown in Table 9-2.

9.2.18 The complementary agents shall comply with the appropriate specifications of the International Organization for Standardization (ISO).<sup>\*</sup> See ISO Publication 7202 (Powder)

9.2.19 The discharge rate of complementary agents shall be no less than the values shown in Table 9-2.



9.2.20 Dry chemical powders shall only be substituted with an agent that has equivalent or better firefighting capabilities for all types of fires where complementary agent is expected to be used.

**Note:** *Guidance on the use of complementary agents can be found in the Airport Services Manual (Doc 9137), Part 1.*

9.2.21 A reserve supply of foam concentrate, equivalent to 200 per cent of the quantities identified in Table 9-2, shall be maintained on the aerodrome for vehicle replenishment purposes.

**Note:** *Foam concentrate carried on fire vehicles in excess of the quantity identified in Table 9-2 can contribute to the reserve.*

9.2.22 A reserve supply of complementary agent, equivalent to 100 per cent of the quantity identified in Table 9-2, shall be maintained on the aerodrome for vehicle replenishment purposes. Sufficient propellant gas shall be included to utilize this reserve complementary agent.

9.2.23 Category 1 and 2 aerodromes that have replaced up to 100 per cent of the water with complementary agent shall hold a reserve supply of complementary agent of 200 per cent.

9.2.24 Where a major delay in the replenishment of the supplies is anticipated, the amount of reserve supply in 9.2.22, 9.2.23 and 9.2.24 shall be increased as determined by a risk assessment.

**Note:** See the Airport Services Manual (Doc 9137), Part 1 for guidance on the conduct of a risk analysis to determine the quantities of reserve extinguishing agents.

### **Rescue equipment**

9.2.25 An aerodrome operator shall provide rescue equipment commensurate with the level of aircraft operations on the rescue and fire fighting vehicle(s) at the scene of an incident.

9.2.26 An aerodrome operator shall ensure that the rescue equipment carried on each vehicle is suitable for purpose, secured in transit, and readily accessible at an incident site.

9.2.27 Where the requisite rescue equipment is carried on secondary vehicles not part of the immediate rescue and firefighting response, an aerodrome or heliport operator shall ensure that such vehicles arrive at the incident scene no more than three minutes from the initial call.

9.2.28 Where the airport emergency plan calls for a vehicle to leave the scene, e.g. for water replenishment, the aerodrome or heliport operator shall ensure that rescue equipment commensurate with the level of aircraft operations remains available at the scene throughout rescue and/or firefighting operations.

**Note:** *Guidance on the rescue equipment to be provided at an aerodrome is given in the Airport Services Manual (Doc 9137), Part 1.*

## Response time

9.2.29 The operational objective of the rescue and firefighting service shall be to achieve a response time not exceeding:

- A. Three minutes for a RWY length 3500 m and above to any point of each operational runway, in optimum visibility and surface conditions.
- B. Two minutes for a RWY length below 3500 m to any point of each operational runway, in optimum visibility and surface conditions.

9.2.30 The operational objective of the rescue and firefighting service shall be to achieve a response time not exceeding:

- A. Three minutes to any other part of the response area, in optimum visibility and surface conditions.
- B. Two minutes for Heliports/Helipads.

**Note 1:** Response time is considered to be the time between the initial call to the rescue and firefighting service, and the time when the first responding vehicle(s) is (are) in position to apply foam at a rate of at least 50 per cent of the discharge rate specified in Table 9-2.

**Note 2:** Optimum visibility and surface conditions are defined as daytime, good visibility, no precipitation with normal response route free of surface contamination, e.g. water, ice or snow.

9.2.31 To meet the operational objective as nearly as possible in less than optimum conditions of visibility, especially during low visibility operations, suitable guidance, equipment and/or procedures for rescue and firefighting services shall be provided.

**Note:** Additional guidance is available in the Airport Services Manual (Doc 9137), Part 1.

9.2.32 Any vehicles, other than the first responding vehicle(s), required to deliver the amounts of extinguishing agents specified in Table 9-2 shall ensure continuous agent application and shall achieve to arrive by three minutes and not exceed a time of four minutes from the initial call.

9.2.33 A system of preventive maintenance of rescue and fire fighting vehicles shall be employed to ensure effectiveness of the equipment and compliance with the specified response time throughout the life of the vehicle.

9.2.34 An aerodrome operator shall document a procedure for undertaking response test and maintain records of such tests.

## Emergency access roads

9.2.35 Emergency access roads shall be provided on an aerodrome where terrain conditions permit their construction, so as to facilitate achieving minimum response times. Particular attention shall be given to the provision of ready access to approach areas up to 1 000 m from the threshold, or at least within the aerodrome boundary. Where a fence is provided, the need for convenient access to outside areas, including both quick access emergency exit gates, and clear passage outside such gates, shall be provided.

**Note:** *Aerodrome service roads may serve as emergency access roads when they are suitably located and constructed.*

9.2.36 Emergency access roads shall be capable of supporting the heaviest vehicles which will use them, and be usable in all weather conditions. Roads within 90 m of a runway shall be surfaced to prevent surface erosion and the transfer of debris to the runway. Sufficient vertical clearance shall be provided from overhead obstructions for the largest vehicles.

9.2.37 When the surface of the road is indistinguishable from the surrounding area, edge markers shall be placed at intervals of about 10 m.

### **Fire stations**

9.2.38 An aerodrome operator shall normally house all rescue and fire fighting vehicles in a single fire station. For large aerodromes, multiple runways, and movement areas on both sides of a runway, satellite fire stations may be provided whenever the response time cannot be achieved from a single fire station, subject to the prior approval of the Public Authority for Civil Aviation.

9.2.39 The fire station shall be located so that the access for rescue and fire fighting vehicles into the runway area is direct and clear, requiring a minimum number of turns.

### **Communication and alerting systems**

9.2.40 A discrete communication system shall be provided linking a fire station with the control tower, any other fire station on the aerodrome and the rescue and fire fighting vehicles.

9.2.41 An alerting system for rescue and firefighting personnel, capable of being operated from that station, shall be provided at a fire station, any other fire station on the aerodrome and the aerodrome control tower.

9.2.42 An aerodrome operator shall provide special telephone, two-way radio communication and general alarm systems for the rescue and firefighting service to ensure the dependable transmission of essential emergency and routine information, consistent with the individual requirements of each aerodrome or heliport to serve the following purposes:

- a) Emergency signals to ensure the immediate summoning of designated personnel not on standby duty;
- b) As necessary, summoning essential related services on or off the aerodrome;
- c) Maintaining communication by means of two-way radio with the rescue and fire fighting vehicles in attendance at an aircraft accident or incident.

9.2.43 An aerodrome operator shall provide direct communication between the rescue and firefighting service and the flight crew of an aircraft in emergency on frequency 121.600MHz, unless an alternative frequency has been agreed by the Public Authority for Civil Aviation.

## Number of rescue and fire fighting vehicles

9.2.44 The minimum number of rescue and fire fighting vehicles provided at an aerodrome shall be in accordance with the following tabulation:

Aerodrome category	Rescue and fire fighting vehicles
1	1
2	1
3	1
4	1
5	1
6	2
7	2
8	3
9	3
10	3

**Note:** Guidance on minimum characteristics of rescue and fire fighting vehicles is given in the Airport Services Manual (Doc 9137), Part 1

## Personnel

9.2.45 An aerodrome operator shall ensure all rescue and firefighting personnel are properly trained to perform their duties in an efficient manner and shall participate in live fire drills commensurate with the types of aircraft and type of rescue and firefighting equipment in use at the aerodrome, including pressure-fed fuel fires.

9.2.46 An aerodrome operator shall ensure all rescue and firefighting personnel participate in live pressure-fed fuel fire drills at intervals not exceeding 6 months.

9.2.47 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including aerodrome topography and installations familiarization.

9.2.48 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including familiarization and drills involving based and scheduled aircraft types using the aerodrome.

9.2.49 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including familiarization involving reasonably expected visiting aircraft.

9.2.50 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including rescue and firefighting personnel personal safety.

9.2.51 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including the operation and terminology of aerodrome or heliport and emergency communication systems.

9.2.52 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including participation in live fire drills commensurate with type of rescue and firefighting media delivery systems equipment in use at the aerodrome.

9.2.53 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including emergency aircraft evacuation assistance.

9.2.54 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including adaptation and use of building rescue and firefighting equipment for aircraft, if so required by the airport emergency plan.

9.2.55 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including RFF duties under aerodrome emergency plan.

9.2.56 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including the requirements for, risk assessment, and use of personnel protective clothing and equipment

9.2.57 An aerodrome operator shall ensure all rescue and firefighting personnel shall be properly trained to perform their duties in an efficient manner including the risk assessment and use of respiratory equipment.

9.2.58 An aerodrome operator shall ensure the rescue and firefighting personnel training programme includes training in human performance.

9.2.59 An aerodrome operator shall ensure the rescue and firefighting personnel training programme includes training in team coordination.

***Note 1:*** Guidance to assist the Aerodrome operator in providing proper training is given in Attachment A, Section 18, and the Airport Services Manual (Doc 9137), Part 1.

***Note 2:*** Fires associated with fuel discharged under very high pressure from a ruptured fuel tank are known as “pressure-fed fuel fires”.

***Note 3:*** Guidance material to design training programmes on human performance and team coordination can be found in the Human Factors Training Manual (Doc 9683).

9.2.60 An aerodrome operator shall ensure all rescue and firefighting personnel are trained in basic medical first aid, in order to avoid infliction of additional suffering and / or injury in the removal of the occupants from a crashed aircraft.

9.2.61 During flight operations an aerodrome operator shall provide sufficient trained personnel readily available to ride the rescue and fire fighting vehicles to meet the following aims:

- a) To operate the equipment at maximum capacity.
- b) That all rescue and firefighting personnel are trained to perform the rescue and firefighting duties required by the airport emergency plan.
- c) Ensure that minimum response times can be achieved.
- d) Ensure continuous agent application at the appropriate rate can be maintained.
- e) Deployed in a way that ensures that personnel can use hand lines.
- f) Deployed in a way that ensures that personnel can use ladders normally associated with rescue and firefighting operations commensurate with the types of aircraft expected to use the aerodrome.
- g) Self-contained breathing apparatus entry control, and provision of other respiratory protective equipment when require by the site risk assessment.
- h) To operate all requisite rescue and firefighting and ancillary equipment necessary at the site.

9.2.62 In determining the minimum number of rescue and firefighting personnel required, a task resource analysis shall be completed by the aerodrome operator and submitted to PACA for approval and the level of staffing documented in the Aerodrome Manual.

**Note:** *Guidance on the use of a task resource analysis can be found in the Airport Services Manual (Doc 9137), Part 1.*

9.2.63 An aerodrome operator shall ensure all responding personnel are provided with protective clothing and respiratory equipment, as required by the incident, to enable them to perform their duties in an effective manner.

9.2.64 An aerodrome operator shall ensure all rescue and firefighting personnel are trained to perform their duties in an efficient manner including refresher training.

9.2.65 An aerodrome operator shall ensure all rescue and firefighting personnel are medically approved by a facility which is acceptable to PACA to perform their operational duties.

9.2.66 An aerodrome operator shall ensure all rescue and firefighting personnel are and physically fit to perform their duties in an efficient manner.

### 9.3 Disabled aircraft removal

**Note:** Guidance on removal of a disabled aircraft, including recovery equipment, is given in the Airport Services Manual (Doc 9137), Part 5. See also Annex 13 concerning protection of evidence, custody and removal of aircraft.

9.3.1 A plan for the removal of an aircraft disabled on, or adjacent to, the movement area shall be established for an aerodrome, and a coordinator designated to implement the plan, when necessary.

9.3.2 The disabled aircraft removal plan shall be based on the characteristics of the aircraft that may normally be expected to operate at the aerodrome, and include among other things:

- a) A list of equipment on, or in the vicinity of the aerodrome which would be available for such purpose;
- b) Competent personnel on, or in the vicinity of, the aerodrome who would be available for such purpose; and
- c) Arrangements for the rapid receipt of aircraft recovery equipment kits available from other aerodromes.

### 9.4 Wildlife strike hazard reduction

**Note:** The presence of wildlife (birds and animals) on and in the aerodrome vicinity poses a serious threat to aircraft operational safety.

9.4.1 The wildlife strike hazard on, or in the vicinity of, an aerodrome shall be assessed through:

- a) The establishment of a national procedure for recording and reporting wildlife strikes to aircraft;
- b) The collection of information from aircraft operators, aerodrome personnel and other sources on the presence of wildlife on or around the aerodrome constituting a potential hazard to aircraft operations; and
- c) An ongoing evaluation of the wildlife hazard by competent personnel.

**Note:** See Annex 15, Chapter 5.

9.4.2 An Aerodrome operator shall maintain a database of wildlife strikes and the wildlife strike reports form (Attachment E) shall be forwarded to PACA every three months. PACA will compile and forward the reports to the ICAO for inclusion in the ICAO Bird Strike Information System (IBIS) database.

**Note:** The IBIS is designed to collect and disseminate information on wildlife strikes to aircraft. Information on the system is included in the Manual on the ICAO Bird Strike Information System (IBIS) (Doc 9332).

- 9.4.3 An aerodrome operator shall take action to decrease the risk to aircraft operations by adopting measures to minimize the likelihood of collisions between wildlife and aircraft.

**Note:** *Guidance on effective measures for establishing whether or not wildlife, on or near an aerodrome, constitute a potential hazard to aircraft operations, and on methods for discouraging their presence, is given in the Airport Services Manual (Doc 9137), Part 3.*

- 9.4.4 An aerodrome operator shall take action to eliminate or to prevent the establishment of garbage disposal dumps or any other source which may attract wildlife to the aerodrome, or its vicinity, unless an appropriate wildlife assessment indicates that they are unlikely to create conditions conducive to a wildlife hazard problem. Where the elimination of existing sites is not possible, the aerodrome operator shall ensure that any risk to aircraft posed by these sites is assessed and reduced to as low as reasonably practicable
- 9.4.5 An Aerodrome operator shall give due consideration to aviation safety concerns related to land developments in the vicinity of the aerodrome that may attract wildlife.
- 9.4.6 An aerodrome operator shall train its staff involved in wildlife strike hazard reduction to a level of competence appropriate to their duties and the equipment used.

## 9.5 Apron management service

- 9.5.1 When warranted by the volume of traffic and operating conditions, an appropriate apron management service shall be provided on an apron by an aerodrome operator, ATS unit, or by a cooperative combination of these, in order to:
- a) Regulate movement with the objective of preventing collisions between aircraft, and between aircraft and obstacles;
  - b) Regulate entry of aircraft into, and coordinate exit of aircraft from, the apron with the aerodrome control tower; and
  - c) Ensure safe and expeditious movement of vehicles and appropriate regulation of other activities.
- 9.5.2 When the aerodrome control tower does not participate in the apron management service, procedures shall be established by the aerodrome operator to facilitate the orderly transition of aircraft between the apron management unit and the aerodrome control tower.

**Note:** *Guidance on an apron management service is given in the Airport Services Manual (Doc 9137), Part 8, and in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476).*

- 9.5.3 Where an apron management service is provided, an aerodrome operator shall provide the apron management service with radiotelephony communications facilities.



- 9.5.4 Where low visibility procedures are in effect, persons and vehicles operating on an apron shall be restricted to the essential minimum.

**Note:** *Guidance on related special procedures is given in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476).*

- 9.5.5 An emergency vehicle responding to an emergency shall be given priority over all other surface movement traffic.

- 9.5.6 A vehicle operating on an apron shall:

- a) Give way to an emergency vehicle; an aircraft taxiing, about to taxi, or being pushed or towed; and
- b) Give way to other vehicles in accordance with local regulations.

- 9.5.7 An aerodrome operator shall ensure that an aircraft stand is visually monitored to ensure that the required clearance distances are provided to an aircraft using the stand

## 9.6 Ground servicing of aircraft

- 9.6.1 Fire extinguishing equipment suitable for at least initial intervention in the event of a fuel fire and personnel trained in its use shall be readily available during the ground servicing of an aircraft, and there shall be a means of quickly summoning the rescue and firefighting service in the event of a fire or major fuel spill.

- 9.6.2 When aircraft refueling operations take place while passengers are embarking, on board or disembarking, ground equipment shall be positioned so as to allow:

- a) The use of a sufficient number of exits for expeditious evacuation; and
- b) A ready escape route from each of the exits to be used in an emergency.

## 9.7 Aerodrome vehicle operations

**Note 1:** *Guidance on aerodrome vehicle operations is contained in Attachment A, Section 19, and on traffic rules and regulations for vehicles in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476).*

**Note 2:** *It is intended that roads located on the movement area be restricted to the exclusive use of aerodrome personnel and other authorized persons, and that access to the public buildings by an unauthorized person will not require use of such roads.*

- 9.7.1 A vehicle shall be operated:

- a) On a manoeuvring area only as permitted by the aerodrome control tower; and
- b) On an apron only as permitted by the aerodrome operator.

- 9.7.2 The driver of a vehicle on the movement area shall comply with all mandatory instructions conveyed by markings and signs unless otherwise instructed by:
- a) The aerodrome control tower when on the manoeuvring area; or
  - b) The appropriate unit when on the apron.
- 9.7.3 The driver of a vehicle on the movement area shall comply with all mandatory instructions conveyed by lights.
- 9.7.4 The driver of a vehicle on the movement area shall be appropriately trained for the tasks to be performed and shall comply with the instructions issued by:
- a) The aerodrome control tower, when on the manoeuvring area; and
  - b) The appropriate unit, when on the apron.
- 9.7.5 The driver of a radio-equipped vehicle shall establish satisfactory two-way radio communication with the aerodrome control tower before entering the manoeuvring area and with the appropriate unit when required before entering the apron. The driver shall maintain a continuous listening watch on the assigned frequency when on the movement area.

## 9.8 Surface movement guidance and control systems

### Application

- 9.8.1 A surface movement guidance and control system shall be provided at an aerodrome.

**Note:** *Guidance on surface movement guidance and control systems is contained in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476).*

### Characteristics

- 9.8.2 The design of a surface movement guidance and control system an aerodrome operator shall take into account:
- a. The density of air traffic;
  - b. The visibility conditions under which operations are intended;
  - c. The need for pilot orientation;
  - d. The complexity of the aerodrome layout; and
  - e. Movements of vehicles.
- 9.8.3 The visual aid components of an SMGCS, i.e. markings, lights and signs, shall be designed to conform with the relevant specifications stipulated in the CAR 139.

9.8.4 An SMGCS shall be designed to assist in the prevention of inadvertent incursions of aircraft and vehicles onto an active runway.

9.8.5 The system shall be designed to assist in the prevention of collisions between aircraft, and between aircraft and vehicles or objects, on any part of the movement area.

**Note:** *Guidance on control of stop bars through induction loops and on a visual taxiing guidance and control system is contained in the Aerodrome Design Manual (Doc 9157), Part 4.*

9.8.6 Where an SMGCS is provided by selective switching of stop bars and taxiway centre line lights, the following requirements shall be met:

- a) Taxiway routes which are indicated by illuminated taxiway centre line lights shall be capable of being terminated by an illuminated stop bar;
- b) The control circuits shall be so arranged that when a stop bar located ahead of an aircraft is illuminated, the appropriate section of taxiway centre line lights beyond it is suppressed; and
- c) The taxiway centre line lights are activated ahead of an aircraft when the stop bar is suppressed.

**Note 1:** *See Sections 5.3.16 and 5.3.19 for specifications on taxiway centre line lights and stop bars, respectively.*

**Note 2:** *Guidance on installation of stop bars and taxiway centre line lights in surface movement guidance and control systems is given in the Aerodrome Design Manual (Doc 9157), Part 4.*

9.8.7 Surface movement radar for the manoeuvring area shall be provided at an aerodrome intended for use in runway visual range conditions less than a value of 350 m unless alternative procedures and facilities are in place to prevent collisions to the satisfaction of PACA.

9.8.8 Surface movement radar for the manoeuvring area shall be provided at an aerodrome other than that in 9.8.7 when traffic density and operating conditions are such that regularity of traffic flow cannot be maintained by alternative procedures and facilities.

**Note:** *Guidance on the use of surface movement radar is given in the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476) and in the Air Traffic Services Planning Manual (Doc 9426).*

## **9.9 Siting of equipment and installations on operational areas**

**Note 1:** *Requirements for obstacle limitation surfaces are specified in 4.2.*

**Note 2:** *The design of light fixtures and their supporting structures, light units of visual approach slope indicators, signs, and markers, is specified in 5.3.1, 5.3.5, 5.4.1 and 5.5.1, respectively. Guidance on the frangible design of visual and non-visual aids for navigation is given in the Aerodrome Design Manual (Doc 9157), Part 6.*

- 9.9.1 Unless its function requires it to be there for air navigation purposes, no equipment or installation shall be:
- a) On a runway strip, a runway end safety area, a taxiway strip or within the distances specified in Table 3-1, column 11, if it would endanger an aircraft; or
  - b) On a clearway if it would endanger an aircraft in the air.
- 9.9.2 Any equipment or installation required for air navigation purposes which must be located:
- a) on that portion of a runway strip within:
    - 1) 150 m of the runway centre line where the code number is 3 or 4; or
    - 2) 45 m of the runway centre line where the code number is 1 or 2; or
  - b) on a runway end safety area, a taxiway strip or within the distances specified in Table 3-1; or
  - c) on a clearway and which would endanger an aircraft in the air;

Shall be frangible and mounted as low as possible.

- 9.9.3 Any equipment or installation required for air navigation or for aircraft safety purposes which must be located on the non-graded portion of a runway strip shall be regarded as an obstacle and shall be frangible and mounted as low as possible.

**Note:** *Guidance on the siting of navigation aids is contained in the Aerodrome Design Manual (Doc 9157), Part 6.*

- 9.9.4 Unless its function requires it to be there for air navigation or for aircraft safety purposes, no equipment or installation shall be located within 240 m from the end of the strip and within:
- a) 60 m of the extended centre line where the code number is 3 or 4; or
  - b) 45 m of the extended centre line where the code number is 1 or 2;

Of a precision approach runway category I, II or III.

- 9.9.5 Any equipment or installation required for air navigation or for aircraft safety purposes which must be located on or near a strip of a precision approach runway category I, II or III and which:
- a) is situated on that portion of the strip within 77.5 m of the runway centre line where the code number is 4 and the code letter is F; or
  - b) is situated within 240 m from the end of the strip and within:
    - 2) 60 m of the extended runway centre line where the code number is 3 or 4; or
    - 2) 45 m of the extended runway centre line where the code number is 1 or 2; or
  - c) penetrates the inner approach surface, the inner transitional surface or the balked landing surface;

Shall be frangible and mounted as low as possible.

- 9.9.6 Any equipment or installation required for air navigation or for aircraft safety purposes which is an obstacle of operational significance in accordance with 4.2.4, 4.2.11, 4.2.20 or shall be frangible and mounted as low as possible.

## 9.10 Fencing

### Application

- 9.10.1 A fence or other suitable barrier shall be provided on an aerodrome to prevent the entrance to the movement area of animals large enough to be a hazard to aircraft.
- 9.10.2 A fence or other suitable barrier shall be provided on an aerodrome to deter the inadvertent or premeditated access of an unauthorized person onto a non-public area of the aerodrome.

**Note 1:** *This is intended to include the barring of sewers, ducts, tunnels, etc., where necessary to prevent access.*

**Note 2:** *Special measures may be required to prevent the access of an unauthorized person to runways or taxiways which overpass public roads.*

- 9.10.3 Suitable means of protection shall be provided to deter the inadvertent or premeditated access of unauthorized persons into ground installations and facilities essential for the safety of civil aviation located off the aerodrome.

### Location

- 9.10.4 The fence or barrier shall be located so as to separate the movement area and other facilities or zones on the aerodrome vital to the safe operation of aircraft from areas open to public access.
- 9.10.5 When greater security is thought necessary, a 3 m cleared area shall be provided on both sides of the fence or barrier to facilitate the work of patrols and to make trespassing more difficult.
- 9.10.6 A perimeter road shall be provided inside the aerodrome fencing for the use of both maintenance personnel and security patrols.

## 9.11 Security lighting

- 9.11.1 At an aerodrome where it is deemed desirable for security reasons, at the discretion of PACA, an aerodrome operator shall illuminate the fence at a suitable level, barrier, and access points.

## 9.12 Autonomous runway incursion warning system

**Note 1:** *The inclusion of detailed specification for an ARIWS in this section is not intended to imply that an ARIWS has to be provided at an aerodrome.*

**Note 2:** *The implementation of an ARIWS is a complex issue deserving careful consideration by PACA, aerodrome operators, air traffic services and in coordination with the aircraft operators.*

**Note 3:** *Attachment A, Section 21, provides a description of an autonomous runway incursion warning system (ARIWS) and information on its use.*

**Note 4:** *PACA may require operators to implement ARIWS unless a study indicates that it is not required.*

### Characteristics

#### 9.12.1 Where an ARIWS is installed at an aerodrome:

- a) It shall provide autonomous detection of a potential incursion or of the occupancy of an active runway and a direct warning to a flight crew or vehicle operator;
- b) It shall function and be controlled independently of any other visual system on the aerodrome;
- c) Its visual aid components, i.e. lights, shall be designed to conform with the relevant specifications in 5.3; and
- d) Failure of part or all of it shall not interfere with normal aerodrome operations. To this end, provision shall be made to allow the ATC unit to partially or entirely shut down the system.

**Note 1:** *An ARIWS may be installed in conjunction with enhanced taxiway centre line markings, stop bars or runway guard lights.*

**Note 2:** *It is intended that the system(s) be operational under all weather conditions, including low visibility.*

**Note 3:** *An ARIWS may share common sensory components of an SMGCS or A-SMGCS, however, it operates independently of either system.*

#### 9.12.2 Where an ARIWS is installed at an aerodrome, information on its characteristics and status shall be provided to the appropriate aeronautical information services for promulgation in the AIP with the description of the aerodrome surface movement guidance and control system and markings as specified in Annex 15, Appendix 1.

**Note:** *Detailed specifications concerning the AIP are contained in PANS-AIM (Doc 10066).*

### 9.13 Airside Safety Committee / Runway Safety Team

9.13.1 An aerodrome operator shall establish an airside safety committee / runway safety team for each aerodrome under its management.

**Note:** Comprehensive guidance material concerning RST is contained in the ICAO Runway Safety Team Handbook.

9.13.2 The committee / team shall consist of:

- a) Head or representative of air traffic control
- b) Head or representative of aerodrome safety
- c) Head or representative of rescue and fire fighting
- d) Head or representative aerodrome security officer
- e) Head or representative aerodrome maintenance
- f) A member of the airlines or the head of the Airline Operation Committee (AOC)
- g) A member of the ground handling agent(s)
- h) A member of the catering services
- i) A member of the refueling companies
- j) A representative of the joint user of the aerodrome as per reference 9.12.3.

9.13.3 If the aerodrome is a joint user aerodrome, a representative of the joint user shall be invited to be part of the airside safety committee / runway safety team on the recommendation of PACA.

9.13.4 The aerodrome safety committee / runway safety team shall meet on a quarterly basis and review and discuss all airside safety concerns (including runway incursion), operational concerns and maintenance concerns.

9.13.5 The terms of reference for the aerodrome safety committee / runway safety team shall also include:

- a) Evaluation of the effectiveness of all markings and signage at the aerodrome to prevent runway incursions;
- b) The promotion of safety awareness through training, licensing and the publication of safety bulletins;
- c) Establishing and discussing local safety procedures and guidelines;
- d) Incident reporting and investigation, subsequent data analysis and dissemination of trends, common causes etc.;
- e) Generation and evaluation of safety suggestions; and
- f) Preparation of regular joint safety campaigns.

---

## CHAPTER 10 - AERODROME MAINTENANCE

### 10.1 General

**10.1.1** A maintenance programme, including preventive maintenance where appropriate, shall be established at an aerodrome to maintain facilities in a condition which does not impair the safety, regularity or efficiency of air navigation.

**Note 1:** *Preventive maintenance is programmed maintenance work done in order to prevent a failure or degradation of facilities.*

**Note 2:** *“Facilities” are intended to include such items as pavements, visual aids, fencing, drainage systems, electrical systems and buildings.*

**10.1.2** The design and application of the maintenance programme shall observe Human Factors principles.

**Note:** *Guidance material on Human Factors principles can be found in the Human Factors Training Manual (Doc 9683).*

### 10.2 Pavements

**10.2.1** The surfaces of all movement areas including pavements (runways, taxiways and aprons) and adjacent areas shall be inspected and their conditions monitored regularly as part of an aerodrome preventive and corrective maintenance programme with the objective of avoiding and eliminating any foreign object debris (FOD) that might cause damage to aircraft or impair the operation of aircraft systems.

**Note 1:** *See 2.9.3 for inspections of movement areas.*

**Note 2:** *Procedure on carrying out daily inspections of the movement area and control of FOD are given in the, PANS-Aerodrome (Doc 9981), the Manual of Surface Movement Guidance and Control Systems (SMGCS) (Doc 9476) and the Advanced Surface Movement Guidance and Control Systems (A-SMGCS) Manual (Doc 9830).*

**Note 3:** *Additional guidance on sweeping/cleaning of surfaces is contained in the Airport Services Manual (Doc 9137), Part 9.*

**Note 4:** *Guidance on precautions to be taken in regard to the surface of shoulders is given in Attachment A, Section 9, and the Aerodrome Design Manual (Doc 9157), Part 2.*

**10.2.2** The surface of a runway shall be maintained in a condition such as to prevent formation of harmful irregularities.

**Note:** *See Attachment A, Section 5.*



**10.2.3** A paved runway shall be maintained in a condition so as to provide surface friction characteristics at or above the minimum friction level as stated in Table 2-1 of Chapter 2.

**Note:** *The Airport Services Manual (Doc 9137), Part 2, contains further information on this subject, on improving surface friction characteristics of runways.*

**10.2.4** Runway surface friction characteristics for maintenance purposes shall be periodically measured at intervals not exceeding 6 months with a continuous friction measuring device using self-wetting features and documented. The frequency of these measurements shall be sufficient to determine the trend of the surface friction characteristics of the runway. Any deviation from the above regulation shall have prior approval from PACA.

**Note 1:** *Guidance on evaluating the friction characteristics of a runway is provided in Attachment A, Section 7. Additional guidance is included in the Airport Services Manual (Doc 9137), Part 2.*

**Note 2:** *The objective of 10.2.3 to 10.2.6 is to ensure that the surface friction characteristics for the entire runway remain at or above a minimum friction level specified by the CAR 139*

**Note 3:** *Guidance for the determination of the required frequency is provided in Attachment A, Section 7 and in the Airport Services Manual (Doc 9137), Part 2, Appendix 5.*

**10.2.5** Corrective maintenance action shall be taken to prevent the runway surface friction characteristics for either the entire runway or a portion thereof from falling below a minimum friction level specified by the CAR 139.

**Note:** *A portion of runway in the order of 100 m long may be considered significant for maintenance or reporting action.*

**10.2.6** When there is reason to believe that the drainage characteristics of a runway, or portions thereof, are poor due to slopes or depressions, then the runway surface friction characteristics shall be assessed under natural or simulated conditions that are representative of local rain, and corrective maintenance action shall be taken as necessary.

**10.2.7** When a taxiway is used by turbine-engined aeroplanes, the surface of the taxiway shoulders shall be maintained so as to be free of any loose stones or other objects that could be ingested by the aeroplane engines.

**Note:** *Guidance on this subject is given in the Aerodrome Design Manual (Doc 9157), Part 2.*

---

## 10.3 Removal of contaminants

- 10.3.1** Standing water, mud, dust, sand, oil, rubber deposits and other contaminants shall be removed from the surface of runways in use as rapidly and completely as possible to minimize accumulation.
- 10.3.2** Taxiways shall be kept clear of standing water, mud, dust, sand, oil etc., to the extent necessary to enable aircraft to be taxied to and from an operational runway.
- 10.3.3** Aprons shall be kept clear of standing water, mud, dust, sand, oil etc., to the extent necessary to enable aircraft to manoeuvre safely or, where appropriate, to be towed or pushed.
- 10.3.4** Whenever the clearance of standing water, mud, dust, sand, oil etc., from the various parts of the movement area cannot be carried out simultaneously, the order of priority after the runway(s) in use shall be set in consultation with the affected parties such as rescue and firefighting service.
- 10.3.5** Chemicals to remove rubber deposits on aerodrome pavements shall be used when conditions indicate their use could be effective. Caution shall be exercised in the application of the chemicals so as not to create a more slippery condition.

**Note:** *Guidance on the use of chemicals for aerodrome pavements is given in the Airport Services Manual (Doc 9137), Part 2.*

- 10.3.6** Chemicals which may have harmful effects on aircraft or pavements, or chemicals which may have toxic effects on the aerodrome environment, shall not be used.

## 10.4 Runway pavement overlays

**Note:** *The following specifications are intended for runway pavement overlay projects when the runway is to be returned temporarily to an operational status before resurfacing is complete. This may necessitate a temporary ramp between the new and old runway surfaces. Guidance on overlaying pavements and assessing their operational status is given in the Aerodrome Design Manual (Doc 9157), Part 3.*

- 10.4.1** The longitudinal slope of the temporary ramp, measured with reference to the existing runway surface or previous overlay course, shall be:
- a) 0.5 to 1.0 per cent for overlays up to and including 5 cm in thickness; and
  - b) Not more than 0.5 per cent for overlays more than 5 cm in thickness.
- 10.4.2** Overlaying shall proceed from one end of the runway toward the other end so that based on runway utilization most aircraft operations will experience a down ramp.

- 10.4.3** The entire width of the runway shall be overlaid during each work session.
- 10.4.4** Before a runway being overlaid is returned to a temporary operational status, a runway centre line marking conforming to the specifications in Section 5.2.3 shall be provided. Additionally, the location of any temporary threshold shall be identified by a 3.6 m wide transverse stripe.
- 10.4.5** The overlay shall be constructed and maintained above the minimum friction level specified in 10.2.3.

## 10.5 Visual aids

**Note 1:** *These specifications are intended to define the maintenance performance level objectives. They are not intended to define whether the lighting system is operationally out of service.*

**Note 2:** *Enhanced vision systems (EVS) technology relies on the infra-red heat signature provided by incandescent lighting. Annex 15 protocols provide an appropriate means of notifying aerodrome users of EVS when lighting systems are converted to LED.*

- 10.5.1** The light output of approach, runway and taxiway lighting to meet performance level objectives. A light shall be deemed to be unserviceable when the main beam average intensity is less than 50 per cent of the value specified in the appropriate figure in Appendix 2. For light units where the designed main beam average intensity is above the value shown in Appendix 2, the 50 per cent value shall be related to that design value.
- 10.5.2** The basic purpose of visual aid systems is to aid in the safe operation of aircraft. Therefore, the highest standards of maintenance are required. Once a system has been installed, its usefulness is dependent on its serviceability which in turn depends upon the effectiveness of the maintenance work carried out. A system of preventive maintenance of visual aids shall be employed to ensure lighting and marking system reliability.

**Note:** *Guidance on preventive maintenance of visual aids is given in the Airport Services Manual (Doc 9137), Part 9.*

- 10.5.3** The system of preventive maintenance employed for a precision approach runway category I, II or III shall include at least the following checks:
- Visual inspection and in-field measurement of the intensity, beam spread and orientation of lights included in the approach and runway lighting systems;
  - Control and measurement of the electrical characteristics of each circuitry included in the approach and runway lighting systems; and

- 
- c) Control of the correct functioning of light intensity settings used by air traffic control.

**10.5.4** In-field measurement of intensity, beam spread and orientation of lights included approach and runway lighting systems for a precision approach runway category I, II or III shall be undertaken by measuring all lights, as far as practicable, to ensure conformance with the applicable specification of Appendix 2. using a mobile measuring unit of sufficient accuracy to analyze the characteristics of the individual lights.

**10.5.5** The frequency of measurement of lights for a precision approach runway category I, II or III shall be based on traffic density, the local pollution level, the reliability of the installed lighting equipment and the continuous assessment of the results of the in-field measurements but, in any event, shall not be less than twice a year for in-pavement lights and not less than once a year for other lights

**10.5.6** The frequency of measurement of lights for a precision approach runway category II or III shall be based on traffic density, the local pollution level, the reliability of the installed lighting equipment and the continuous assessment of the results of the in-field measurements but, in any event, shall not be less than twice a year for in-pavement lights and not less than once a year for other lights including floodlights or as instructed by PACA.

**10.5.7** The system of preventive maintenance employed for a precision approach runway category II or III shall have as its objective that, during any period of category II or III operations, all approach and runway lights are serviceable and that, in any event, at least:

- a) 95 per cent of the lights are serviceable in each of the following particular significant elements:
  - 1) precision approach category II and III lighting system, the inner 450 m;
  - 2) runway centre line lights;
  - 3) runway threshold lights; and
  - 4) runway edge lights;
- b) 90 per cent of the lights are serviceable in the touchdown zone lights;
- c) 85 per cent of the lights are serviceable in the approach lighting system beyond 450 m; and
- d) 75 per cent of the lights are serviceable in the runway end lights.

In order to provide continuity of guidance, the allowable percentage of unserviceable lights shall not be permitted in such a way as to alter the basic pattern of the lighting system. Additionally, an unserviceable light shall not be permitted adjacent to another unserviceable light, except in a barrette or a crossbar where two adjacent unserviceable lights may be permitted.

**Note:** *With respect to barrettes, crossbars and runway edge lights, lights are considered to be adjacent if located consecutively and:*

- *Laterally: in the same barrette or crossbar; or*
- *Longitudinally: in the same row of edge lights or barrettes.*

**10.5.8** The system of preventive maintenance employed for a stop bar provided at a runway-holding position used in conjunction with a runway intended for operations in runway visual range conditions less than a value of 350 m shall have the following objectives:

- a) No more than two lights will remain unserviceable; and
- b) Two adjacent lights will not remain unserviceable unless the light spacing is significantly less than that specified.

**10.5.9** The system of preventive maintenance employed for a taxiway intended for use in runway visual range conditions less than a value of 350 m shall have as its objective that no two adjacent taxiway centre line lights be unserviceable.

**10.5.10** The system of preventive maintenance employed for a precision approach runway category I shall have as its objective that, during any period of category I operations, all approach and runway lights are serviceable and that, in any event, at least 85 per cent of the lights are serviceable in each of the following:

- a) Precision approach category I lighting system;
- b) Runway threshold lights;
- c) Runway edge lights;
- d) Runway end lights;
- e) Runway centre line lights;
- f) Runway touchdown zone lights; and
- g) Runway stop bar

In order to provide continuity of guidance an unserviceable light shall not be permitted adjacent to another unserviceable light unless the light spacing is significantly less than that specified.

**Note:** In barrettes and crossbars, guidance is not lost by having two adjacent unserviceable lights.

**10.5.11** The system of preventive maintenance employed for a runway meant for take-off in runway visual range conditions less than a value of 550 m shall have as its objective that, during any period of operations, all runway lights are serviceable and that in any event:

- a) at least 95 per cent of the lights are serviceable in the runway centre line lights (Where provided) and in the runway edge lights; and
- b) at least 75 per cent of the lights are serviceable in the runway end lights
- c) In order to provide continuity of guidance, an unserviceable light shall not be permitted adjacent to another unserviceable light.

**10.5.12** The system of preventive maintenance employed for a runway meant for take-off in runway visual range conditions of a value of 550 m or greater shall have as its objective that, during any period of operations, all runway lights are serviceable and that, in any event, at least 85 per cent of the lights are serviceable in the runway edge lights and runway end lights. In order to provide continuity of guidance, an unserviceable light shall not be permitted adjacent to another unserviceable light.

**10.5.13** During low visibility procedures the aerodrome operator shall not carry out construction or maintenance activities in the proximity of aerodrome electrical systems

---

## **CHAPTER 11 - AERODROME CERTIFICATION / OPERATOR OBLIGATION / USE OF AERODROMES**

### **11.1 Application for Aerodrome Certificate**

**11.1.1** An applicant for an aerodrome certificate shall submit to PACA for approval:

- a. An application for an aerodrome certificate, Attachment C;
- b. Copies of the proposed aerodrome manual including the emergency plan, safety management system, organisational structure of the aerodrome operator,
- c. Rescue and firefighting service operations manual,
- d. Security programme for the aerodrome,
- e. Aerodrome and obstacle survey,
- f. Aerodrome chart, at a scale of 1:2500 showing all obstacles, aerodrome boundary, and all airside operational infrastructure,
- g. Apron chart, at a scale of 1:500, showing all aircraft parking stands, markings, dimensions and airside operational infrastructure,
- h. Draft AIP AD2 text and charts.
- i. A draft completed aerodrome certification checklist (Attachment D)
- j. The application referred to in paragraph (1) (a) shall be in a form and manner acceptable to the PACA and shall be signed, in ink by the applicant and include the appropriate application fee.

**11.1.2** PACA must be satisfied that Any other Government Departments\Authorities who may have regulations covering the siting or operation of the Aerodrome have been consulted; this includes such things as an Environmental Impact Study have been carried out and assessed.

### **11.2 Issuance of Aerodrome Certificate**

**11.2.1** The PACA shall issue an aerodrome certificate to an applicant authorizing the applicant to operate a certified aerodrome if:

- a. The applicant and his/her staff have the necessary competence and experience to operate and maintain the aerodrome properly;
- b. The proposed aerodrome manual, submitted pursuant to paragraph 11.1.1(b), is accepted by the PACA pursuant to 11.1 (a) and:

- c. The aerodrome facilities, services and equipment are in accordance with the standards and practices specified by PACA
- d. The granting of the certificate is not contrary to the interests of aviation safety

**11.2.2** PACA shall accept a proposed aerodrome manual if it:

- a. Accurately describes the physical specifications of the aerodrome; and
- b. Conforms to the requirements set out in Appendices to CAR139 that apply in respect of an aerodrome manual.

**11.2.3** Where an aerodrome does not meet a standard set out where applicable, of CAR139, the PACA may specify in the aerodrome certificate such conditions relating to the subject matter of the standard as are necessary to ensure a level of safety equivalent to that established by the standard and as are necessary in the public interest and to ensure aviation safety.

**11.2.4** An aerodrome certificate issued pursuant to 11.2 is effective until the date shown on the certificate.

**11.2.5** An aerodrome certificate issued pursuant to 11.2 shall include the following:

- a. Legal name of the aerodrome operator
- b. Name and WGS84 coordinates of the aerodrome
- c. Certificate number
- d. Date of issue, and date of expiry
- e. Conditions, including, but not limited to, type of use, maximum aircraft size permitted to use the aerodrome based on fire category and code letter, and, if applicable, wheel base, absolute weather minima based on aeronautical ground lighting and instrument approach procedures/navigation aids, any exemptions and variations

### **11.3 Transfer of Aerodrome Certificate**

**11.3.1** When an aerodrome certificate is transferred, it shall be transferred in accordance with this Section.

**11.3.2** PACA shall transfer an aerodrome certificate to a transferee where:

- a. The current holder of the aerodrome certificate, at least 112 days before ceasing to operate the aerodrome, notifies the PACA in writing that the current holder will cease to operate the aerodrome as of the date specified in the notice;



- b. The current holder of the aerodrome certificate notifies the PACA in writing of the name of the transferee;
- c. The transferee applies in writing to the PACA, within 91 days before the current holder ceases to operate the aerodrome, for the aerodrome certificate to be transferred to the transferee; and
- d. The requirements set out in 11.2 are met.

**11.3.3** An application referred to in paragraph (2) (c) shall include a copy of the notice referred to in paragraph (2) (a).

**11.3.4** If the PACA does not consent to the transfer of an aerodrome certificate, it shall notify the transferee, in writing, of its reasons not later than 14 days after making that decision.

## **11.4 Interim Aerodrome Certificate**

**11.4.1** The PACA may issue to an applicant referred to in 11.2, or a transferee referred to in 11.3, an interim aerodrome certificate authorizing the applicant or transferee to operate an aerodrome if the PACA is satisfied that:

- a. An aerodrome certificate in respect of the aerodrome will be issued to the applicant or transferred to the transferee as soon as the application procedure in respect of the issuance or transfer is completed; and
- b. The issuance of the interim aerodrome certificate is in the public interest and not detrimental to aviation safety.

**11.4.2** An interim aerodrome certificate issued pursuant to 11.4.1 expires on the earlier of:

- a. The date on which the aerodrome certificate is issued or transferred, and
- b. The date specified in the interim aerodrome certificate on which it will expire.

**11.4.3** Except for paragraph 1.4.1 and 1.4.2 this CAR 139 applies in respect of an interim aerodrome certificate in the same manner as it applies in respect of an aerodrome certificate.

## **11.5 Amendment and Cancellation of Aerodrome Certificate**

**11.5.1** PACA may, if the requirements of 11.2 and 11.3 are met, amend an aerodrome certificate where:

- a. There is a change in the use or operation of the aerodrome;

- b. There is a change in the boundaries of the aerodrome;
- c. The holder of the aerodrome certificate requests the amendment; or
- d. There is a change in the ownership or management of the aerodrome.

**11.5.2** PACA shall cancel an aerodrome certificate where this no longer applies in respect of the aerodrome referred to in the aerodrome certificate, as determined in accordance with 1.4.

## **11.6 Duration of certificate**

- a. An aerodrome certificate will be valid until the next AIRAC date after the second anniversary of the date of issue of the certificate, or
- b. Until the aerodrome operator surrenders it, or it is suspended or revoked by the PACA: whichever occurs first.
- c. The holder of an aerodrome certificate that expires or is revoked shall forthwith surrender the certificate to the PACA.
- d. The holder of an aerodrome certificate that is suspended, shall forthwith produce the certificate to PACA for appropriate endorsement.

## **11.7 Renewal of certificate**

**11.7.1** An application for the renewal of an aerodrome certificate shall be submitted to PACA before the application renewal date specified in the certificate or, if no such date is specified, not less than 90 days before the certificate expires.

**11.7.2** The renewal of an aerodrome certificate will be subject to the satisfactory completion of regular audits and inspections by the PACA during the validity and at renewal of the certificate. All to the satisfaction of the PACA.

## **11.8 Exemptions**

**11.8.1** The PACA may exempt, in writing, an aerodrome operator from complying with specific provisions of this regulation. Before PACA decides to exempt the aerodrome operator, they will take into account all safety related aspects, including an aeronautical study and risk assessment.

**11.8.2** An exemption is subject to the aerodrome operator complying with the conditions and procedures specified by PACA in the aerodrome certificate as being necessary in the interest of maintaining a comparable acceptable level of safety as would be provided by a compliant aerodrome.

**11.8.3** When an aerodrome does not meet the requirement of a standard and recommended practice specified in this regulation, PACA may determine, after reviewing aeronautical studies or risk assessment, only if and where permitted by the standards and rec practices, the conditions and procedures that are necessary to ensure a level of safety equivalent to that established by the relevant standard or practice.

## **11.9 Deviations**

**11.9.1** The holder of an aerodrome certificate may deviate from any requirement of CAR 139 only to the extent required to meet an emergency condition requiring immediate action for the protection of life or property involving carriage by air.

**11.9.2** A certificate holder who deviates from a requirement of CAR 139 shall provide an immediate notification to PACA, followed by written report to PACA as soon as practicable, but in any event not later than one business day after the emergency. The report shall cover the nature, extent and duration of the deviation.

## **11.10 Preparation of the aerodrome manual**

**11.10.1** The aerodrome operator shall have a manual, to be known as the aerodrome manual. The aerodrome manual shall:

- a) Be typewritten or printed, and signed by the aerodrome operator;
- b) Be in a format that is easy to revise;
- c) Have a system for recording the currency of pages and amendments thereto, including a page for logging revisions; and
- d) Be organized in a manner that will facilitate the preparation, review and acceptance and approval process.
- e) Electronic and printed copy to be provided to PACA

## **11.11 Location of the aerodrome manual**

- a) The aerodrome operator shall provide the PACA with a complete and current copy of the aerodrome manual.
- b) The aerodrome operator shall keep at least one complete and current copy of the aerodrome manual at the aerodrome and one copy at the operator's principal place of business if other than the aerodrome.
- c) The aerodrome operator shall make the copy referred to in 11.11(b) available for inspection by authorized PACA personnel.

---

**11.12 Information to be included in the aerodrome manual**

The aerodrome operator shall include in an aerodrome manual to the extent that they are applicable to the aerodrome, information as listed in the Chapter 12 of the CAR 139-Part I

**11.13 Information reporting**

The information listed in the CAR 139, that is required to be notified, shall be reported to the Aeronautical Information Service (AIS) through PACA, in accordance with the specifications in Chapter 2, for inclusion in the Sultanate of Oman AIP.

**11.14 Amendment of the aerodrome manual**

The aerodrome operator shall alter or amend the aerodrome manual, in order to maintain the accuracy of the information in the manual.

To maintain the accuracy of the aerodrome manual, the PACA may issue a written directive to an aerodrome operator requiring the operator to alter or amend the manual in accordance with that directive.

**11.15 Notification of changes to the aerodrome manual**

An aerodrome operator shall notify the PACA, as soon as possible of any changes that the operator wishes to make to the aerodrome manual.

**11.16 Acceptance and approval of the Aerodrome**

The PACA shall accept/approve the aerodrome manual and any amendments thereto, provided these meet the requirements of these regulations.

**11.17 Obligations of Aerodrome Operator**

**11.17.1** The aerodrome operator shall ensure that each aerodrome operator holding an aerodrome certificate shall establish an internal quality system.

The operator shall also;

a) Comply:

- 1) Subject to subparagraph (3), with the standards set out in this rule, where applicable, of CAR139 as they read on the date on which the aerodrome certificate was issued,
- 2) In respect of any part or facility of the aerodrome that has been replaced or improved, with the standards set out in this rule, where applicable, of CAR139 as they read on the date on which the part or facility was

---

returned to service, and

- 3) With any conditions specified in the aerodrome certificate by the PACA pursuant to 11.2;

b) Without charge, at the request of a PACA inspector:

- 1) Allow access to the aerodrome facilities, equipment or operating procedures at the aerodrome for the purpose of ensuring the safety of aircraft,
- 2) Allow access to any part of the aerodrome or any aerodrome facilities, equipment or records,

c) review each issue of each aeronautical information publication on receipt thereof and, immediately after such review, notify the PACA of any inaccurate information contained therein that pertains to the aerodrome;

d) notify PACA in writing at least 21 days (attached with a risk assessment/aeronautical study ) before any change to the aerodrome, the aerodrome facilities or the level of service at the aerodrome that has been planned in advance and that is likely to affect the accuracy of the information contained in an aeronautical information publication, or is required to be notified to the PACA in accordance with the conditions of the aerodrome certificate; and 180 days in advance for such information that is required to be notified in accordance with the AIRAC cycle.

e) As the circumstances require for the purpose of ensuring aviation safety, inspect the aerodrome:

- 1) As soon as practicable after any incident or accident,
- 2) During any period of construction or repair of the aerodrome or of aerodrome facilities that are designated in the aerodrome certificate, and
- 3) At any other time when there are conditions at the aerodrome that could be hazardous to aviation safety; and

f) Subject to paragraph (d), notify the PACA in writing of any change in aerodrome operations within 21 days after the date of the change.

**11.17.2** Subject to subsection (3), the aerodrome operator shall give the PACA, and appropriate air traffic control unit, immediate notice of any of the following circumstances of which the aerodrome operator has knowledge:

- a) Any projection by an object through an obstacle limitation surface relating to the aerodrome;

- b) The existence of any obstruction or hazardous condition affecting aviation safety at or near the aerodrome;
- c) Any reduction in the level of services at the aerodrome that are set out in an aeronautical information publication;
- d) The closure of any part of the manoeuvring area of the aerodrome; and
- e) Any other conditions that could be hazardous to aviation safety at the aerodrome and against which precautions are warranted.

**11.17.3** Where it is not feasible for an aerodrome operator to cause notice of a circumstance referred to in subsection (2) to be received at the appropriate air traffic control unit, the aerodrome operator shall give immediate notice directly to the pilots who may be affected by that circumstance.

**11.17.4** The aerodrome operator shall remove from the surface of the aerodrome any vehicle or other obstruction that is likely to be hazardous to aviation safety.

**11.17.5** The aerodrome operator shall maintain a sufficient number of qualified and competent personnel to comply with the requirements of its aerodrome manual and the applicable standards of CAR139.

**11.17.6** The Aerodrome operator shall appoint an Accountable Manager who is approved by PACA and has full control of the resources, final authority over operations under the certificate/approval of the organization and ultimate responsibility and accountability for the establishment, implementation and maintenance of the SMS; safety policy and the resolution of all safety issues.

**11.17.7** The accountable manager shall nominate post holders, acceptable and approved by PACA, who are responsible for the management and supervision of safety critical aspects for the aerodrome operations.

**11.17.8** When PACA requires competency certification, the aerodrome operator shall employ only those persons possessing such certificates.

**11.17.9** The aerodrome operator shall ensure the competency of all personnel involved with aerodrome safety functions and nominated post holders, and shall obtain prior approval from PACA for all new appointments, including promotions and similar changes in safety related functions.

**11.17.10** The aerodrome operator shall implement a programme to upgrade the competency of the personnel referred to in subsection (11.17.5).

**11.17.11** The aerodrome operator shall integrate architectural and infrastructure-related requirements for the optimum implementation of international civil aviation

---

security measures into the design and construction of new facilities and alterations to existing facilities at an aerodrome.

**11.17.12** In the design of aerodromes, the aerodrome operator/owner shall take into account, where appropriate, land-use and environmental control measures.

## **11.18 Notification of aviation occurrence on an aerodrome**

a) A holder of an aerodrome certificate issued in accordance with this Rule Part must notify PACA as soon as practicable of any aviation occurrence on or related to the aerodrome, including if the certificate holder is involved in the aviation occurrence, and the occurrence is an incident, accident or is a new hazard to the safety of an aircraft operations. A new hazard is one not, at the time of the occurrence, in the aerodrome operator's risk register.

b) The notification of an occurrence must be conveyed by a means acceptable to PACA. The information should be delivered as soon as possible within 24 hours and contain, where ascertainable, information in accordance with the following:

- 1) Date and time of the occurrence:
- 2) Brief description of events:
- 3) Name of the aerodrome:
- 4) Description and the location of the reported defect or obstruction:
- 5) Name, organisation, and contact details of the person notifying the occurrence.

### **11.18.1 Details of occurrence**

Notwithstanding the notification of a serious occurrence or an immediate hazard to the safety of an aircraft operation under 11.8, the following certificate holder must provide PACA with the applicable details of the occurrence on the form appropriate to the occurrence, namely: air traffic occurrence report, bird strike report, or hazard/occurrence/incident/accident report form from the operator's safety management system.

### **11.18.2 Investigation and reporting**

A holder of a certificate referred to in 11.8(a) who is required to provide details of an occurrence to PACA under 11.8.1 must, unless otherwise notified by PACA

- 1) Conduct an investigation to identify the facts relating to its involvement in the occurrence and establish, so far as those facts allow, the cause or causes of the occurrence; and
- 2) On completion of the investigation, submit a report of the investigation to the PACA no later than 30 days after the occurrence.

### 11.19 Warning Notices

Where low flying or taxiing aircraft at or near an aerodrome are likely to be hazardous to pedestrian or vehicular traffic, the operator of the aerodrome shall immediately:

- a) Post notices warning of the hazard on any road, path or sidewalk maintained for the use of members of the public, that is adjacent to the manoeuvring area; or
- b) Where such road, path or sidewalk is not owned or controlled by the aerodrome operator, inform the authorities responsible for posting notices that there is a hazard.

### 11.20 Prohibitions

No person shall:

- a) operate an aerodrome referred to in 1.4 unless an aerodrome certificate is issued in respect of that aerodrome;
- b) knowingly use an aerodrome in a manner contrary to a condition set out in the aerodrome certificate;
- c) walk, stand, drive a vehicle, park a vehicle or aircraft or cause an obstruction on the movement area of an aerodrome, except in accordance with permission given:
  - 1) by the aerodrome operator, and
  - 2) where applicable, by the appropriate air traffic control unit;
- d) operate any vessel, or cause any obstruction, on the surface of any part of a water area of an aerodrome that is to be kept clear of obstructions in the interest of aviation safety, when ordered, by signal or otherwise, to leave or not to approach that area by the appropriate air traffic control unit or by the operator of the aerodrome;
- e) tow an aircraft on an active movement area at night unless the aircraft displays operating wingtip, tail and anti-collision lights or is illuminated by lights mounted on the towing vehicle and directed at the aircraft being towed;
- f) park or otherwise leave an aircraft on an active manoeuvring area at night unless the aircraft displays operating wingtip, tail and anti-collision lights or is illuminated by lanterns suspended from the wingtips, tail and nose of the aircraft;



- g) at an aerodrome, knowingly remove, deface, extinguish or interfere with a marker, marking, light or signal that is used for the purpose of air navigation, except in accordance with permission given:
  - 1) by the operator of the aerodrome, and
- h) where applicable, by the appropriate air traffic control unit; at or in the vicinity of an aerodrome, knowingly display a marker, marking, sign, light or signal that is likely to be hazardous to aviation safety by causing glare or by causing confusion with or preventing clear visual perception of a marker, marking, sign, light or signal that is required under this Subpart;
- i) steal equipment of air navigation facilities or any instruments, devices or cables that are deemed necessary to ensure the safety of aviation;
- j) willfully damage or obstruct installations, buildings, cables, instruments devices or equipment that are deemed necessary to ensure the safety of aviation;
- k) allow a bird or other animal that is owned by the person or that is in the person's custody or control to be unrestrained within the boundaries of an aerodrome, except for the purpose of controlling other birds or animals at the aerodrome as permitted by the aerodrome operator; or
- l) Discharge a firearm within or into an aerodrome without the permission of the appropriate PACA.

### **11.21 Fire Prevention**

- a) Subject to subsections (2) and (3), no person shall, at an aerodrome, smoke or display an open flame:
  - 1. on an apron;
  - 2. on an aircraft loading bridge or on a gallery or balcony that is adjacent to or that overhangs an apron; or
  - 3. In an area where smoking or an open flame is likely to create a fire hazard that could endanger persons or property.
- b) The operator of an aerodrome may, in writing, authorize maintenance or servicing operations on an apron that involve the use, production or potential development of an open flame or that involve the production or potential development of a spark where the operations are conducted in a manner that is not likely to create a fire hazard that could endanger persons or property.
- c) The operator of an aerodrome may permit smoking in an enclosed building or shelter located on an apron where such smoking is not likely to create a fire hazard that could endanger persons or property.

### **11.22 Rain and Flood Control**

- a) Each aerodrome operator whose aerodrome is located where flooding conditions occur shall prepare, maintain and carry out a rain and flood control plan.

- 
- b) The rain and flood control plan shall include instructions and procedures for:
- Prompt control, as completely as practical, of floodwater on each movement area;
  - Timely commencement of control operations; and
  - Immediate notification of all air operators using the aerodrome when any portion of the aerodrome normally available to them could be hazardous to aviation safety.

## **11.23 Charges**

**11.23.1** PACA shall levy charges on certificates it issues and/or validates and on services provided for aerodrome operators.

**11.23.2** The PACA shall determine the amount of charges for the use and operation of aerodrome open for public use, or for occupying parts thereof, also for the air navigation and weather services, and any other services for users of aerodromes and their facilities. The PACA may modify these charges.

**11.23.3** The PACA shall collect the charges on certificates it issues and/or validates and on services provided to the users of aerodrome and aerodrome operators according to financial rules and regulations in force.

## **11.24 Compliance with CAR139**

When an aerodrome operator fails to comply with the requirements of CAR139, their aerodrome certificate, aerodrome manual, or any document issued and/or validated by the PACA, PACA can to impose operating restrictions, suspend or revoke the certificate or penalties and contraventions as identified in the Civil Aviation Law of the Sultanate of Oman.

---

## 11.25 Use of Aerodrome

**Note:** This regulation prescribes the requirements for any person operating an aircraft using any place as an aerodrome

### 11.25.1 General

No person operating an aircraft shall —

- a) Use any place certificated as an aerodrome under this Part unless that person can comply with the limitations and operational conditions placed on the use of the aerodrome; or
- b) Use any place for the purpose of landing at or taking off from at night unless the runway or heliport to be used at that place is equipped with lighting, and that lighting is operating; or
- c) Use any manoeuvring area or part of any manoeuvring area that has been notified as or marked unsafe for aircraft use by the aerodrome operator.
- d) Taxi on the apron or the manoeuvring area of an aerodrome without the permission of either:
  - 1) The person in charge of the aerodrome; or
  - 2) The air traffic control unit or aerodrome flight information service unit notified as being on watch at the aerodrome.

### 11.25.2 Air Transport Aeroplanes

No person operating an aeroplane engaged on an air transport operation shall use any place for the purpose of landing at or taking off from unless:

- a) the place has physical characteristics, obstacle limitation surfaces, and visual aids commensurate with the characteristics of the aeroplane being used, the lowest meteorological minima to be used, and the ambient light conditions; and
- b) the place is suitable for landing at and taking off; and
- c) the runway used is clear of all persons, animals, vehicles or other obstructions during the landing or take-off; and
- d) that person is employing a checking system to determine that the condition of the place is safe for that operation; and

- e) if the aeroplane has a certified seating capacity of more than 30 passengers and is engaged on a scheduled flight, the place is certificated as an aerodrome under this regulation and
- f) if the place is not certificated under this Part, the aeroplane can be manoeuvred in the aerodrome traffic circuit clear of any obstructions, and not in conflict with the aerodrome traffic circuit or instrument approach procedure of any other aerodrome.

### **11.25.3 Non-Air Transport Aircraft other than Helicopters**

No person operating an aircraft other than a helicopter, which is engaged on an operation other than an air transport operation, shall use any place for the purpose of landing at or taking off from unless:

- a) The place is suitable for landing at and taking off; and
- b) The runway or place used is clear of all persons, animals, vehicles or other obstructions during the landing or take off other than persons and vehicles essential to the operation; and
- c) The aircraft can be manoeuvred in the aerodrome traffic circuit clear of any obstructions, and not in conflict with the aerodrome traffic circuit or instrument approach procedure of any other aerodrome.

### **11.25.4 Use of heliports/helipads**

Except for a person operating a helicopter on an external load operation, no person operating a helicopter shall use any place within a populous area as a heliport unless the heliport has physical characteristics, obstacle limitation surfaces and visual aids commensurate with the characteristics of the helicopter being operated and the ambient light conditions during operations, and the person has complied with paragraph (11.8.4.3).

No person operating a helicopter in a place outside a populous area, and no person operating a helicopter on an external-load operation, shall use any place as a heliport unless:

- a) The place is suitable for the helicopter to hover clear of obstructions; and
- b) The surface is suitable for touchdown and lift-off if that is the intention; and
- c) The person has complied with paragraph (11.8.4.3).

---

Before using any place as a heliport/helipad, a person operating a helicopter shall ensure that:

- a) The heliport/helipad is clear of all persons, animals, vehicles or other obstructions during the hover, touchdown or lift-off other than persons and vehicles essential to the operation; and
- b) The selected approach and take off paths are such that, if the helicopter is not a performance- Class 1 helicopter, an autorotative landing can be conducted without any undue risk to any person on the ground; and
- c) The helicopter can be manoeuvred in the aerodrome traffic circuit clear of any obstructions, and not in conflict with the aerodrome traffic circuit or instrument approach procedure of any other aerodrome.
- d) In this rule, external load operation means an operation in which a load is suspended from the helicopter.

---

## CHAPTER 12 -PARTICULARS TO BE INCLUDED IN AN AERODROME MANUAL

**Note 1:** *Aerodrome operator shall refer to the following regulations & guidance materials for the preparation of the Aerodrome manual:*

- 1) *CAR 139 part -1 and all publications used for cross reference*
- 2) *CAR 139, part -1 Chapter 11, Aerodrome Certification*
- 3) *Manual on Certification of Aerodromes (Doc 9774)*
- 4) *) CAR 100- Safety Management System\ Annex 19, Safety Management*
- 5) *Procedures for Air Navigation Services - Aerodromes (PANS-AERODROMES) (Doc 9981)*

**Note 2:** *In writing the procedure on each category clear and precise information should be included on:*

- 1) *When, or in what circumstances, is an operating procedure to be activated;*
- 2) *How is an operating procedure activated;*
- 3) *Actions to be taken;*
- 4) *The person(s) to carry out the actions; and*
- 5) *Equipment, and access to such equipment, necessary for carrying out the actions.*

**Note 3:** *If any of the procedures specific above is not relevant or applicable, the reason should be given*

### 12.1 ADMINISTRATION PROCEDURE FOR THE AERODROME MANUAL

**12.1.1** An aerodrome operator shall include the following in an aerodrome manual:

- a) Contents and/or index
- b) Amendment record page
- c) Amendment procedure
- d) Indication of changes on amended pages
- e) Abbreviations, glossary
- f) Checklist of pages
- g) Bibliography/references
- h) Distribution list

---

**12.1.2 General**

An aerodrome operator shall include the following in an aerodrome manual:

- a) Purpose and scope of the aerodrome manual
- b) The legal requirement for an aerodrome certificate and an aerodrome manual as prescribed in the national regulations
- c) Conditions for use of the aerodrome — a statement to indicate that the aerodrome shall at all times, when it is available for the take-off and landing of aircraft, be so available to all persons on equal terms and conditions
- d) The available aeronautical information system and procedures for its promulgation
- e) The system for recording aircraft movement; including landings and take-offs of all aircraft, and, if separately recorded, stand times
- f) Acknowledgement by the aerodrome operator of their obligations and systems to comply with standards and practices and conditions of the aerodrome certificate
- g) Acknowledgement by the aerodrome operator of their obligations and systems to allow access of PACA Inspectors
- h) Acknowledgement by the aerodrome operator of their obligations and systems to review aeronautical publications, including each amendment issued
- i) Acknowledgement by the aerodrome operator of their obligations and systems to notify PACA of any aerodrome facilities or level of service
- j) Acknowledgement by the aerodrome operator of their obligations and systems to inspect the aerodrome after an aviation occurrence or when likely hazardous operations may exist
- k) Acknowledgement by the aerodrome operator of their obligations and systems to notify AIS, PACA and Air traffic control of any object, hazardous condition, level of service or remove from the aerodrome surface any hazardous obstruction
- l) Acknowledgement by the aerodrome operator of their obligations and systems to remove from the aerodrome surface any vehicle or other obstruction that is likely to be hazardous to aviation safety
- m) Acknowledgement by the aerodrome operator of their obligations and systems to maintain sufficient qualified and competent personnel to comply with CAR 139
- n) Acknowledgement by the aerodrome operator of their obligations and systems to ensure only personnel approved by PACA are involved with aerodrome safety functions
- o) Acknowledgement by the aerodrome operator of their obligations and systems

---

to post notices of hazards on any road, path or sidewalk, where applicable

## **12.2 PARTICULARS OF THE AERODROME SITE**

### **12.2.1 An aerodrome operator shall include the following in an aerodrome manual:**

- a) A plan of the aerodrome showing the main aerodrome facilities for the operation of the aerodrome including, particularly, the location of each wind direction indicator
- b) A plan of the aerodrome showing the aerodrome airside/landside, movement area, and manoeuvring area boundaries
- c) A plan showing the distance of the aerodrome from the nearest city, town or other populous area, and the location of any aerodrome facilities and equipment outside the boundaries of the aerodrome
- d) Particulars of the title of the aerodrome site. If the boundaries of the aerodrome are not defined in the title documents particulars of the title to, or interest in, the property on which the aerodrome is located and a plan showing the boundaries and position of the aerodrome

## **12.3 PARTICULARS OF THE AERODROME REQUIRED TO BE REPORTED TO AERONAUTICAL INFORMATION SERVICES (AIS)**

### **12.3.1 GENERAL INFORMATION**

An aerodrome operator shall include the following in an aerodrome manual:

- a) The name of the aerodrome
- b) The location of the aerodrome
- c) The geographical coordinates of the aerodrome reference point determined in terms of the WGS-84 reference datum
- d) The aerodrome elevation
- e) The aerodrome geoid undulation
- f) The elevation of each threshold
- g) Each threshold geoid undulation
- h) Elevation of the runway end
- i) Elevation of any significant high and low points along the runway
- j) Elevation of the highest elevation of the touchdown zone of a precision approach runway
- k) The aerodrome reference temperature
- l) Details of the aerodrome beacon, or justification if none provided



- 
- m) The name of the aerodrome operator
  - n) The address and telephone numbers at which the aerodrome operator may be contacted at all times

### 12.3.2 AERODROME DIMENSIONS AND RELATED INFORMATION

An Aerodrome operator shall include the following in an aerodrome manual:

- 1) Runway — true bearing,
- 2) Runway — designation numbers
- 3) Runway — length, & width to the nearest metre
- 4) Runway — displaced threshold(s) location to the nearest metre
- 5) Runway — slope
- 6) Runway — surface type(s)
- 7) Runway — type of runway
- 8) Runway — for a precision approach runway, the existence of an obstacle free zone
- 9) Length, width of runway strip to the nearest metre
- 10) Surface type of runway strip
- 11) Length, width of runway end safety areas to the nearest metre
- 12) Surface type of runway end safety areas
- 13) Length, width of stopways to the nearest metre
- 14) Surface type of stopways
- 15) Length, width of taxiways to the nearest metre
- 16) Surface type of taxiways
- 17) Apron surface type
- 18) Apron aircraft stands
- 19) Clearway length to the nearest metre
- 20) Clearway ground profile
- 21) Visual aids for approach procedures, viz. approach lighting type
- 22) Visual aids for approach procedures, viz. visual approach slope indicator system (PAPI/APAPI)
- 23) Obstacle limitation surfaces
- 24) Marking of runways
- 25) Lighting of runways
- 26) Marking of taxiways
- 27) Lighting of taxiways

- 
- 28) Marking of aprons
  - 29) Lighting of aprons
  - 30) Other visual guidance and control aids on taxiways (including runway holding positions, intermediate holding positions and stop bars)
  - 31) Other visual guidance and control aids on aprons, location & type of visual docking guidance system;
  - 32) Availability of standby power for lighting
  - 33) The location and radio frequency of VOR Aerodrome checkpoints
  - 34) The location and designation of standard taxi routes
  - 35) The geographical coordinates of each threshold
  - 36) The geographical coordinates of appropriate taxiway centre line points
  - 37) The geographical INS checkpoint coordinates of each aircraft stand
  - 38) The geographical coordinates & top elevation of significant obstacles in the approach & take-off areas, in the circling area & in the vicinity of the aerodrome. (may best be shown in the form of charts such as specified in Annexes 4 and 15)
  - 39) Pavement Surface Type
  - 40) Pavement Classification Number: runway
  - 41) Pavement Classification Number: taxiway
  - 42) Pavement Classification Number: apron
  - 43) One or more pre-flight altimeter check locations established on an apron, and runway holding position (if required for RNP), and their elevation to the nearest foot. The elevation of a pre-flight altimeter check location shall be given as the average elevation, rounded to the nearest metre or foot, of the area on which it is located. The elevation of any portion of a pre-flight altimeter check location shall be within 3 m (10 ft) of the average elevation for that location.
  - 44) Declared distances: take-off run available (TORA), take-off distance available (TODA), accelerate-stop distance available (ASDA), landing distance available (LDA)

---

## **12.4 PARTICULARS OF THE AERODROME OPERATING PROCEDURES AND SAFETY MEASURES**

### **12.4.1 AERODROME REPORTING**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for reporting any changes to aerodrome information set out in the AIP and procedures for requesting the issue of NOTAMS, including the following:

- a) Arrangements for reporting any changes to AIS, ATC and PACA, and recording the reporting of changes during and outside the normal hours of aerodrome operations
- b) The names and roles of persons responsible for notifying the changes, their telephone numbers during and outside the normal hours of aerodrome operations, and their email addresses
- c) The address and telephone numbers, as provided by the AIS and PACA of the place where changes are to be reported to the AIS and PACA
- d) The arrangements for removal from service of any part of the manoeuvring area, including the decision making and notification processes

### **12.4.2 ACCESS TO AERODROME THE MOVEMENT AREA**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures that have been developed and are to be followed in coordination with the agency responsible for preventing unlawful interference in Civil Aviation at the aerodrome and for preventing unauthorized entry of persons, vehicles, equipment, animals and other things into the movement area including the following:

- a) The role of the aerodrome operator, the aircraft operator, aerodrome fixed-base operators, the aerodrome security entity, the ATS provider, PACA and other government departments as applicable
- b) The names and roles of the personnel responsible for controlling access to the aerodrome, and the telephone numbers for contacting them during and after working hours, and their email addresses

### **12.4.3 AERODROME EMERGENCY PLAN**

An aerodrome operator shall establish an airport emergency plan at an aerodrome, commensurate with the aircraft operations and other activities conducted at the aerodrome, and include in an aerodrome manual particulars to be included in the aerodrome emergency plan including:

- 1) Plans for dealing with emergencies providing for the coordination of the actions to be taken in an emergency occurring at the aerodrome or in its vicinity

- 
- 2) Contents and/or index for separate AEP
  - 3) Amendment record page for separate AEP
  - 4) Amendment procedure for separate AEP
  - 5) Abbreviations, glossary for separate AEP
  - 6) Checklist of pages for separate AEP
  - 7) Bibliography/references for separate AEP
  - 8) Distribution list for separate AEP
  - 9) Aerodrome emergency committee
  - 10) Agencies familiarity with other agencies' duties
  - 11) Mutual aid agreements with the surrounding community covering initial response and subsequent support to coordinate the response or participation of all existing agencies which, in the opinion of the PACA, could be of assistance in responding to an emergency
  - 12) Aircraft accident on airport
  - 13) Aircraft accident off airport – on land
  - 14) Aircraft accident off airport – on water
  - 15) Aircraft Incident aircraft in flight – severe turbulence
  - 16) Aircraft Incident aircraft in flight – decompression
  - 17) Aircraft Incident aircraft in flight – structural failure
  - 18) Aircraft Incident aircraft on the ground
  - 19) Aircraft Incident - sabotage, bomb threat
  - 20) Aircraft Incident – unlawful seizure
  - 21) Aircraft public health
  - 22) Non aircraft fire – structural
  - 23) Natural disaster
-

- 
- 24) Dangerous goods
  - 25) Medical emergencies
  - 26) Non aircraft public health
  - 27) Compound emergency: aircraft/structure
  - 28) Compound emergency: aircraft/fueling facilities
  - 29) Compound emergency: aircraft/aircraft
  - 30) Classification of emergencies: aircraft accident
  - 31) Classification of emergencies: full emergency
  - 32) Classification of emergencies: local standby
  - 33) Precautions for weather induced physical problems: victims
  - 34) Precautions for weather induced physical problems: emergency personnel
  - 35) Command, communication & coordination functions for execution of the plan:
  - 36) A list of responding organisations, agencies and persons, both on- and off-airport, for site roles, their telephone and facsimile numbers, e-mail and SITA addresses and the radio frequencies of their offices
  - 37) Incidents on the airport covering "during the emergency" considerations, e.g. agency responsible depending on location, developing phases (investigation – accident/criminal); advance notification of all agencies' roles, responsibilities, and reporting structure
  - 38) Incidents on the airport covering "after the emergency" considerations; e.g. transition of PACA, legal factors, restoration of services, public protection
  - 39) Emergency operations centre
  - 40) Mobile command post
  - 41) The appointment of an on-scene commander for the overall emergency operation.
  - 42) Triage principles planned
  - 43) Grid map of the aerodrome and its immediate vicinity
-

- 44) Care of fatalities
- 45) Means of communication with both on aerodrome and external emergency and support services
- 46) Procedures for preservation of evidence for accident investigation, after immediate actions for preservation of life are completed
- 47) Means of communication with flight crew using frequency 121.600MHz, or other frequency as may be approved by PACA
- 48) Procedures for dealing with hazardous materials, including cargo and man-made mineral fibres in aircraft construction
- 49) Procedures for debriefing and record keeping after every incident
- 50) Coordination with rescue coordination centre
- 51) Human factors principles to ensure optimum response

#### **12.4.4 RESCUE AND FIRE FIGHTING**

An aerodrome operator shall include in an aerodrome manual particulars of the facilities, equipment, personnel and procedures, for meeting the rescue and fire-fighting requirements including:

- a) The level of protection provided, expressed in terms of the category of the rescue and fire-fighting services, which shall be in accordance with the longest aeroplane normally using the aerodrome and the type and amounts of extinguishing agents normally available at the aerodrome
- b) RFFS policy including the aerodrome operator's policy regarding level of protection to be provided at different levels of air traffic, training, manning and operating standards
- c) The names and roles of the persons responsible for dealing with the rescue and fire-fighting services at the aerodrome.
- d) Procedures for assessing the RFF category, including vehicles, media, complimentary media, equipment and manpower
- e) Details of RFFS vehicles and equipment, and policy in the event of equipment failure
- f) Procedures for RFFS medical and physical fitness, and competence training and assessment
- g) Details of tests for aerodrome facilities and equipment to be used in emergencies, including the frequency of those tests

- h) Details of exercises to test emergency plans, including the frequency of those exercises: full scale emergency exercise, not exceeding 2 year interval
- i) Details of exercises to test emergency plans, including the frequency of those exercises: partial emergency exercises in intervening year
- j) Details of exercises to test emergency plans, including the frequency of those exercises: intervening table top exercises
- k) Rescue and fire-fighting: the level of protection provided, expressed in terms of the category of the rescue and fire-fighting services, which shall be in accordance with the longest aeroplane normally using the aerodrome
- l) Rescue and fire-fighting: the type and amounts of extinguishing agents normally available at the aerodrome

#### **12.4.5 INSPECTION OF THE AERODROME MOVEMENT AREA AND OBSTACLE LIMITATION SURFACE BY THE AERODROME OPERATOR**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for the inspection of the aerodrome movement area and obstacle limitation surfaces, including the following:

- a) Arrangements for carrying out inspections, including runway friction and water-depth measurements on runways and taxiways, during and outside the normal hours of aerodrome operations.
- b) Arrangements and means of communicating with air traffic control during an inspection.
- c) Arrangements for keeping an inspection logbook and the location of the logbook
- d) Details of inspection intervals and times
- e) Inspection checklist and appropriate proforma
- f) Arrangements for reporting the results of inspections and for taking prompt follow-up actions to ensure correction of unsafe conditions.
- g) The names and roles of persons responsible for carrying out inspections and their telephone numbers during and after working hours, and their email addresses.

#### **12.4.6 VISUAL AIDS AND AERODROME ELECTRICAL SYSTEM**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for the inspection and maintenance of aeronautical lights (including obstacle lighting), signs, markers, and aerodrome electrical systems, including the following:

- a) Arrangements for carrying out inspections during and outside the normal hours of aerodrome operation, and the checklist for such inspections
- b) Arrangements for recording the result of inspections and for taking follow-up action to correct deficiencies
- c) Arrangements for carrying out routine maintenance and emergency maintenance
- d) Arrangements for secondary power supplies, if any, and, if applicable, the particulars of any other method of dealing with partial or total system failure
- e) The names, roles and contact details of the person responsible for the inspection and maintenance of lighting
- f) The performance level objectives of the maintenance programme for different types of lighting

#### **12.4.7 MAINTENANCE OF THE MOVEMENT AREA**

An aerodrome operator shall include in an aerodrome manual particulars of the facilities and procedures for the maintenance of the movement area including:

- a) Arrangements for maintaining the paved areas
- b) Arrangements for maintaining the unpaved runways and taxi ways
- c) Arrangements for maintaining the runway and taxi way strips
- d) Arrangements for the maintenance of aerodrome drainage

#### **12.4.8 AERODROME WORKS - SAFETY**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for planning and carrying out construction and maintenance work safety (including work that may have been carried out at short notice) on or in the vicinity of the movement area which may extend above an obstacle limitation surface, including the following:

- a) Arrangements for communicating with air traffic control during the progress of such work
- b) The names, telephone numbers, email addresses and roles of the persons and organizations responsible for planning and carrying out the work, and arrangements for contacting those persons and organizations at all times
- c) The names, telephone numbers, during and after working hours, and email addresses of the aerodrome fixed-base operators, ground handling agents and aircraft operators who are to be notified of the work
- d) A distribution list, and method of distribution for work plans, if required

#### **12.4.9 APRON SAFETY MANAGEMENT**



An aerodrome operator shall include in an aerodrome manual particulars on the apron management procedures, including the following:

- a) Arrangements between air traffic control and the apron management unit
- b) Arrangements for allocating aircraft parking positions
- c) Arrangements for initiating engine start
- d) Arrangements for ensuring clearance of aircraft push-back
- e) Arrangements for engine test
- f) Marshalling service, or other stand guidance equipment and/or procedures
- g) Leader/follow me service.
- h) Protection from jet blasts
- i) Enforcement of safety precautions during aircraft refueling operations
- j) Apron sweeping
- k) Apron cleaning
- l) Arrangements for reporting incidents and accidents on an apron
- m) Arrangements for auditing the safety compliance of all personnel working on the apron

#### **12.4.10 AIRSIDE VEHICLE CONTROL**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for the control of surface vehicles on or in the vicinity of the movement area, including the following:

- a) Details of the applicable traffic rules (including speed limits and the means of enforcing the rules)
- b) The method of issuing driving permits for operating vehicles in the movement area
- c) The method of issuing vehicle permits for vehicles in the movement area

#### **12.4.11 WILDLIFE HAZARD MANAGEMENT**

An aerodrome operator shall include the following in an aerodrome manual:

- a) Arrangements for assessing wildlife hazards
- b) Arrangements for implementing wildlife control programmes
- c) The names and roles of the persons responsible for dealing with wildlife hazards, and their telephone numbers during and after working hours and their email addresses

**12.4.12 OBSTACLE CONTROL**

An aerodrome operator shall include in an aerodrome manual particulars setting out the procedures for:

- a) Monitoring the obstacle limitation surfaces and Type A Chart for obstacles in the take-off surface
- b) Controlling obstacles within the authority of the operator
- c) Monitoring the height of buildings or structures within the boundaries of the obstacle limitation surfaces
- d) Controlling new developments in the vicinity of aerodromes
- e) Notifying the AIS of the nature and location of obstacles and any subsequent addition or removal of obstacles for action as necessary, including amendment of the AIP publications through PACA

**12.4.13 REMOVAL OF DISABLED AIRCRAFT**

An aerodrome operator shall include in the aerodrome manual particulars of the procedures for removing a disabled aircraft on or adjacent to the movement area, including the following:

- a) The roles of the aerodrome operator and the holder of the aircraft certificate of registration
- b) Arrangements for notifying the holder of the certificate of registration
- c) Arrangements for liaising with the air traffic control unit
- d) Arrangements for obtaining equipment and personnel to remove the disabled aircraft
- e) The names, role, telephone numbers and email addresses of persons responsible for arranging for the removal of disabled aircraft
- f) The telephone/telex/ facsimile numbers and e-mail address of the aerodrome coordinator for the removal of a disabled aircraft on or adjacent to the movement area,
- g) Information on the capability to remove a disabled aircraft, expressed in terms of the largest type of aircraft which the aerodrome is equipped to remove
- h) Objectives for the disabled aircraft removal operation, including time to return a runway to normal operation

**12.4.14 HANDLING OF HAZARDOUS MATERIAL**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for the safe handling and storage of hazardous materials on the aerodrome, including the following:

- a) Arrangements for special areas on the aerodrome to be set up for the storage of flammable liquids (including aviation fuels) and any other hazardous materials
- b) The method to be followed for the delivery, storage, dispensing and handling of hazardous materials

#### **12.4.15 LOW VISIBILITY OPERATIONS**

An aerodrome operator shall include the following in an aerodrome manual:

- a) Particulars of the procedures for the measurement and reporting of runway visual range as and when required,
- b) Particulars of the aerodrome safety procedures including the alerting and ground operations involving people, vehicles, removal of unnecessary people from airside, physical check of lighting installations and warning devices such as signage
- c) The names and telephone numbers, during and after working hours, of the persons responsible for measuring the runway visual range

#### **12.4.16 PROTECTION OF SITES FOR RADAR AND NAVIGATIONAL AIDS**

An aerodrome operator shall include in an aerodrome manual particulars of the procedures for the protection of sites for radar and navigational aids located on the aerodrome to ensure that their performance will not be degraded, including the following:

- a) Arrangements for the control of activities in the vicinity of radar, nav aids, and communications installations;
- b) Arrangements for ground and fence maintenance in the vicinity of these installations
- c) Arrangements for the supply and installation of signs warning of hazardous radiation, and/or high voltage
- d) Arrangement for the removal of any vegetation/trees.

### **12.5 AERODROME ADMINISTRATION**

**12.5.1** An aerodrome operator shall include the following in an aerodrome manual:

- a) An aerodrome organisational chart approved by PACA showing the names and

---

positions of key personnel, including their responsibilities.

- b) The name, position and telephone number of the person who has overall responsibility for aerodrome safety.
- c) Name, chairman, terms of reference of airport committees, including:
  - 1) Aerodrome emergency committee to organize training and other preparations for dealing with emergencies
  - 2) Safety committee, including both occupational safety and health, and aviation and flight safety
  - 3) Runway safety team
  - 4) Airport security committee
  - 5) Airport facilitation committee

### **12.5.2 EXEMPTION(s) GRANTED BY PACA**

An aerodrome operator shall include the following in an aerodrome manual;

- a) Particulars of the exemption(s) granted by the Public Authority for Civil Aviation to be incorporated for reference

## **12.6 AERODROME SAFETY MANAGEMENT SYSTEM**

An aerodrome operator shall include the following in an aerodrome safety management manual:

- a) The safety policy, including insofar as applicable, on the safety management process and its relationship with the operational and maintenance processes
- b) The structure or organization of the safety management system, including staffing and the assignment of both individual and group responsibilities for safety issues
- c) Risk management process including setting safety performance targets, allocating priorities for implementing safety initiatives and providing a framework for controlling the risks to as low a level as is reasonably practicable keeping always in view the requirements of the SARPs in Volumes I and 2 of ICAO Annex 14, and CAR139
- d) System for hazard reporting, analysis, investigation, actions and handling of accidents, incidents, complaints, defects, faults, discrepancies, and monitoring of investigation actions.
- e) Staff training and competency, including the review and evaluation of the adequacy of training provided to staff on safety-related duties and of the certification system for testing their competency
- f) The procedures for consultation with airport stakeholders including employees, sub-contractors, suppliers of goods, lessees, clients and visitors. The

---

incorporation and enforcement of safety- related clauses in the contracts for construction work at the aerodrome.

- g) The internal safety audit and review system detailing the systems and programmes for undertaking regular monitoring and review of the safety management system
- h) The development of an SMS manual that includes details of the safety management procedures employed including the reliable recording systems for all safety management system records.
- i) Identifying number of any exemption given by PACA
- j) Maintain currency and accuracy of the aerodrome manual
- k) Notify changes of the aerodrome manual to PACA

---

## CHAPTER 13 - CERTIFICATION OF TRAINING ORGANISATIONS

### 13.1 Introduction

This Chapter prescribes the certification and operating requirements for organisations providing training for aerodrome staff who are involved with aerodrome safety functions, whose competency requires approval by the PACA. These functions include, but are not limited to:

- a) Rescue and firefighting service;
- b) Aeronautical ground lighting installation, maintenance, and inspection;
- c) Surface friction testing;
- d) Aerodrome flight information service;
- e) Occupational safety and health operations and oversight;
- f) Marshalling;
- g) Airside driving;
- h) Airband radio operator, mobile and fixed stations;
- i) Accident and incident investigation;
- j) Wildlife control;

### 13.2 Eligibility

To be eligible for Approved Training Centre Certificate (Oman Aerodrome Safety Function), the applicant shall meet the requirements of this Chapter to the satisfaction of the PACA and shall submit the following to the PACA:

- a) Registration in the Ministry of Industry and Commerce according to the applicable national Laws or equivalent in the State of Registration of the training centre.
- b) Valid Insurance policy with an adequate amount to cover liability in case of accidents, in particular in respect to:
  - 1) The premises;
  - 2) Students; and
  - 3) Employees and Third party.
- c) Ownership or lease agreement for building(s) and workshops appropriate for the safety function training applied for and the size of the potential operations. The building(s) must be constructed and established according to a standard acceptable to the authority and at least fulfils the adequate specification of the following aspects:
  - 1) Location. An applicant for, or holder of a training centre certificate must

---

have available exclusively, for adequate period of time and at a location approved by the authority.

2) Separation. The building must be separated from other activities and should be used only for the training purposes. The separation should be adequate enough to assure limited accessibility to the concerned people, and protection against external intruders.

3) Environment. The building must be designed and constructed to assure an appropriate learning environment to the students in regard to acceptable level of noise, pollution, heating, conditioning, lighting and ventilation.

4) Safety. The building must be designed and constructed to ensure adequate safety relevant aspects such as fire escape, fire protection, and enough instruction in case of accidents.

5) Accommodation and Entertainment. The building must be designed and established to assure an adequate layout and spaces for non- learning student's activities.

d) Ownership and operational control for all tools and equipment appropriate to the safety function(s) applied for.

e) A feasibility study or business plan that shows a full self-sustaining financial capability for at least 24 months of operation according to the standards applicable in this CAR. The study must contain at least the following aspects:

- 1) Marketing plan.
- 2) Financial plan.
- 3) Capital Plan
- 4) Administrative and operational plan.

f) Safety management policy and system

### **13.3 Application for certificate issuance or amendment**

**13.1.1** An application for a training certificate and training specifications under this CAR shall:

- a) Be made in a form and in a manner prescribed by this CAR;
- b) Be made at least 120 calendar days before the beginning of any proposed training or 60 calendar days before effecting an amendment to any approved training;
- c) Provide the proposed curriculum;
- d) Provide a description and a list of the facilities and materials to be used;

**13.1.2** Each applicant for a training centre and training specification shall provide:

- a) A list of its qualified instructors, together with their curricula vitae;

- 
- b) A statement that the minimum qualification requirements for each instrument management position are met.
  - c) A statement acknowledging that the applicant shall notify the PACA within 10 working days of any change made in the assignment of persons in the required management positions and instructors.
  - d) A description of a recordkeeping system that will identify and document the details of training, qualification, and certification of students and instructors.
  - e) A statement of the maximum number of students it expects to teach at any one time.

The certificate holder must file an application to amend training centre certificate at least 60 calendar days prior to the applicant's proposed effective amendment date.

### 13.4 Issue of and duration of certificate

An applicant who meets the requirements of this CAR is entitled to:

- a) A PACA training centre certificate valid for a period of twenty-four months and shall include the business name, address of the certificate holder, and service for which the certificate holder may conduct training
- b) Training specifications and limitations issued by the authority to the certificate holder containing type of the training authorized including approved courses.
- c) An application for the renewal of training centre's certificate shall be submitted to the PACA of not less than 60 days before the expiry date of the certificate.
- d) The holder of a certificate that is surrendered, suspended, or revoked, shall return the certificate to the PACA within 5 working days after being notified that the certificate is suspended, revoked, or terminated.

### 13.5 Certification Requirements

Personnel requirements: an applicant for the grant of a training centre certificate must employ, contract, or otherwise engage:

- a) A senior person identified as the Chief Executive who must—
  - 1) Have the authority within the applicant's organisation to ensure that the organisation's services can be financed and provided in accordance with the requirements and standards prescribed by this CAR; and
  - 2) Be responsible for ensuring that the organisation complies with the requirements of this CAR; and
- b) A senior person or persons, responsible to the Chief Executive for ensuring that the applicant's organisation complies with the organisation's exposition;



---

and

- c) sufficient personnel to plan, conduct, and supervise the training courses and assessments listed in the applicant's exposition.
- d) The applicant shall establish a procedure for initially assessing, and a procedure for maintaining, the competence of those personnel conducting the training courses and assessments listed in the applicant's exposition.

### **13.6 Instructor requirements**

- 13.1.1** An applicant for a Training Centre or for an additional curriculum must provide the number of instructors holding appropriate qualifications and assessed by PACA as deemed necessary to provide adequate instruction and supervision of the students, including at least one such instructor for each 20 students in each training course. However, the applicant may provide specialised instructors, who are not certificated but who have suitable experience, to the satisfaction of the PACA. The applicant is required to maintain a list of the names and qualifications of specialised instructors, and upon request, provide a copy of the list to the Authority.
- 13.1.2** An applicant for a Training Centre certificate must designate a chief instructor for each approved course of training who is qualified and competent to perform the duties to which that instructor is assigned, and must meet the Instructor qualifications requirements. Instructor qualifications: Each person designated as an instructor shall meet the following requirements:
- a) Hold a certificate in the field of specialty as appropriate;
  - b) Has minimum experience of at least five years in the field of specialty and/or rating competency for the approved course;
  - c) Instructional technique, by qualification and/or experience;
  - d) Show proficiency in the training procedures and equipment handling of the approved training course.

### **13.7 Facilities, equipment, and material requirements**

An applicant for a Training Centre certificate and training specifications or for an amendment of the approved curriculum must have such of the following properly heated, lighted, and ventilated facilities as are appropriate to the curriculum sought and as the authority determines are appropriate for the maximum number of students expected to be taught at any time:

- a) An enclosed classroom suitable for teaching theory classes.
- b) Suitable enclosed space for simulators, if applicable
- c) Suitable quantities of technical equipment, if applicable, for trainees to gain hands-on training experience under supervision.

---

## 13.8 Documentation

- 13.1.1** An applicant for a Training Centre certificate shall hold current copies of all relevant technical standards and practices and any other documentation that is necessary for the provision of the training courses and assessments listed in the applicant's exposition.
- 13.1.2** The applicant shall establish procedures to control the documentation required by paragraph (a). The procedures shall ensure:
- 1) All documentation is reviewed and authorised by appropriate personnel before issue; and
  - 2) Current issues of relevant documentation are available to personnel for the provision of training courses and assessments listed in their exposition; and
  - 3) All obsolete documentation is promptly removed from all points of issue or use; and
  - 4) Changes to documentation are reviewed and approved by appropriate personnel.

## 13.9 Operating Rules

Attendance, tests and enrolment. A certificated training centre shall

- a) Not require any student to attend classes of instruction more than eight hours in any day or more than five days or 40 hours in any seven day period;
- b) Give appropriate tests to each student who completes a unit of instructions as shown in that training centre's curriculum;
- c) Not graduate a student unless he has completed all of the appropriate curriculum requirements; and
- d) Use an approved system for determining final course grades and for recording student attendance. The system must show hours of absence allowed and show how the missed material will be made available to the student.
- e) A certificated training centre shall not accept the application for enrolment nor a person shall enrol in a training centre unless he/she meets the training centre's entry requirements in terms of academic ability, medical and physical fitness, and language, as applicable to the training.

## 13.10 Records

A certificated training centre shall:

- a) Keep a current record of each student enrolled, showing:

- 
- 1) Students attendance, tests and grades received on the subject required by this CAR;
  - 2) The instruction credited to him; and
  - 3) The authenticated transcript of his grades from that training centre.
- b) It shall retain the record for at least five years after the end of the student's enrolment, and shall make each record available for inspection by the authority during that period.
  - c) Keep a current progress chart or individual progress record for each of its students, showing the practical projects completed by the student in each subject.

### **13.11 Transcripts and graduation certificates**

A certificated training centre shall:

- a) Upon request, provide a transcript of student's grades to each student who is graduated from that training centre or who leaves it before being graduated. An official of the training centre shall authenticate the transcript. The transcript shall state the curriculum in which the student was enrolled, whether the student satisfactorily completed that curriculum or not, and the final grades the student received.
- b) Give a graduation certificate or a certificate of completion to each student that he graduates. An official of the training centre shall authenticate the certificate. The certificate shall show the date of graduation and the approved curriculum title.

### **13.12 Maintenance of instructor requirements**

A certificated training centre shall, after certification or additional curriculum, continue adhering to the instructor requirements specified in this CAR 139.

### **13.13 Maintenance of facilities, equipment and material**

A certificated training centre shall:

- a) After certification or additional curriculum, continue providing facilities, equipment and material equal to the standards currently required for the issue of the certification and curriculum that it holds.
- b) Not make a substantial change in facilities, equipment or material that have been approved for a particular curriculum, unless that change is approved by the authority in advance.

### **13.14 Maintenance of curriculum requirements**

A certificated training centre shall:

- a) Adhere to its approved curriculum.

- b) Not change its approved curriculum unless the change is approved by the PACA in advance.

### **13.15 Quality of Instruction**

**13.15.1** An applicant for training centre certificate shall appoint a senior person who has the authority within the applicant's organization to ensure that all training courses and assessment conducted by the centre can be carried out in accordance with the requirements prescribed by this CAR 139.

**13.15.2** A certificated training centre shall provide instruction of such quality that the percentage of those passing the applicable PACA written exams, if applicable, on their first attempt during any period of 24 calendar months is not less than 70% of its graduates.

### **13.16 Display of certificate**

**13.16.1** Each holder of a training centre certificate must display that certificate in a place that is normally accessible to public and is not obscured.

**13.16.2** A certificate must be available for inspection upon request by the PACA.

### **13.17 Change of location**

The holder of a training centre certificate shall not make any change in the centre's location unless the change is approved in advance. If the holder desires to change the location, the holder shall notify the authority, in writing, at least 30 days before the date the change is contemplated. If the holder changes the location without approval, the certificate is considered revoked.

### **13.18 Audit and Inspection**

PACA may at any time, inspect a certificated training centre to determine its compliance with this part to determine if the centre continues to meet the requirements under which it was originally certificated. After each audit or inspection, the centre shall be notified in writing of any deficiencies found during the inspection.

---

## 13.19 Advertising

**13.19.1**A certificated training centre shall not make any statement relating to itself that is false or is designed to mislead any person considering enrolment therein.

**13.19.2**Whenever a training centre indicates in advertising that it is a certificated centre, it shall clearly distinguish between its approved courses and those that are not approved.

**13.19.3**A certificate holder whose certificate has been surrendered, suspended, revoked, or terminated must:

- 1) Promptly remove all indications, including signs, wherever located, that the training centre was certificated by the Sultanate of Oman PACA;
- 2) Promptly cease all advertising indicating that the training centre is certificated by the Sultanate of Oman PACA.

# **APPENDICES**

## APPENDIX 1. COLOURS FOR AERONAUTICAL GROUND LIGHTS, MARKINGS, SIGNS AND PANELS

### 1. General

#### Introduction

*The following specifications define the chromaticity limits of colours to be used for aeronautical ground lights, markings, signs and panels. The specifications are in accord with the 1983 specifications of the International Commission on Illumination (CIE), except for the colour orange in Figure A1-2.*

*It is not possible to establish specifications for colours such that there is no possibility of confusion. For reasonably certain recognition, it is important that the eye illumination be well above the threshold of perception, that the colour not be greatly modified by selective atmospheric attenuations and that the observer's colour vision be adequate. There is also a risk of confusion of colour at an extremely high level of eye illumination such as may be obtained from a high-intensity source at very close range. Experience indicates that satisfactory recognition can be achieved if due attention is given to these factors.*

*The chromaticities are expressed in terms of the standard observer and coordinate system adopted by the International Commission on Illumination (CIE) at its Eighth Session at Cambridge, England, in 1931.\**

*The chromaticities for solid state lighting (e.g. LED) are based upon the boundaries given in the standard S 004/E-2001 of the International Commission on Illumination (CIE), except for the blue boundary of white.*

### 2. Colours for aeronautical ground lights

#### 2.1. Chromaticities for lights having filament-type light sources

2.1.1. The chromaticities of aeronautical ground lights with filament-type light sources shall be within the following boundaries:

CIE Equations (see Figure A1-1a):

##### a) Red

Purple boundary	$y = 0.980 - x$
Yellow boundary	$y = 0.335$ , except for visual approach slope indicator system
Yellow boundary	$y = 0.320$ , for visual approach slope indicator system

**Note:** See 5.3.5.14 and 5.3.5.30.

##### b) Yellow

Red boundary	$y = 0.382$
White boundary	$y = 0.790 - 0.667x$
Green boundary	$y = x - 0.120$

## c) Green

Yellow boundary	$x = 0.360 - 0.080y$
White boundary	$x = 0.650y$
Blue boundary	$y = 0.390 - 0.171x$

## d) Blue

Green boundary	$y = 0.805x + 0.065$
White boundary	$y = 0.400 - x$
Purple boundary	$x = 0.600y + 0.133$

## e) White

Yellow boundary	$x = 0.500$
Blue boundary	$x = 0.285$
Green boundary	$y = 0.440$ and $y = 0.150 + 0.640x$
Purple boundary	$y = 0.050 + 0.750x$ and $y = 0.382$

## f) Variable white

Yellow boundary	$x = 0.255 + 0.750y$ and $y = 0.790 - 0.667x$
Blue boundary	$x = 0.285$
Green boundary	$y = 0.440$ and $y = 0.150 + 0.640x$
Purple boundary	$y = 0.050 + 0.750x$ and $y = 0.382$

**Note:** Guidance on chromaticity changes resulting from the effect of temperature on filtering elements is given in the Aerodrome Design Manual (Doc 9157), Part 4.

2.1.2. Where dimming is not required, or where observers with defective colour vision must be able to determine the colour of the light, green signals shall be within the following boundaries:

Yellow boundary	$y = 0.726 - 0.726x$
White boundary	$x = 0.650y$
Blue boundary	$y = 0.390 - 0.171x$

**Note:** Where the colour signal is to be seen from long range, it has been the practice to use colours with the boundaries of 2.1.2.

2.1.3. Where increased certainty of recognition from white, is more important than maximum visual range, green signals shall be within the following boundaries:

Yellow boundary	$y = 0.726 - 0.726x$
White boundary	$x = 0.625y - 0.041$
Blue boundary	$y = 0.390 - 0.171x$



## 2.2. Discrimination between lights having filament-type light sources

2.2.1. If there is a requirement to discriminate yellow and white from each other, they shall be displayed in close proximity of time or space as, for example, by being flashed successively from the same beacon.

2.2.2. If there is a requirement to discriminate yellow from green and/or white, as for example on exit taxiway centre line lights, the y coordinates of the yellow light shall not exceed a value of 0.40.

**Note:** The limits of white have been based on the assumption that they will be used in situations in which the characteristics (colour temperature) of the light source will be substantially constant.

2.2.3. The colour variable white is intended to be used only for lights that are to be varied in intensity, e.g. to avoid dazzling. If this colour is to be discriminated from yellow, the lights shall be so designed and operated that:

- a) the x coordinate of the yellow is at least 0.050 greater than the x coordinate of the white; and
- b) the disposition of the lights will be such that the yellow lights are displayed simultaneously and in close proximity to the white lights.

## 2.3. Chromaticities for lights having a solid light sources

2.3.1. The chromaticities of aeronautical ground lights with solid light sources, e.g. LEDs, shall be within the following boundaries:

CIE Equations (see Figure A1-1b):

### a) Red

Purple boundary	$y = 0.980 - x$
Yellow boundary	$y = 0.335$ , except for visual approach slope indicator system
Yellow boundary	$y = 0.320$ , for visual approach slope indicator system

**Note:** See 5.3.5.14 and 5.3.5.30.

### b) Yellow

Red boundary	$y = 0.387$
White boundary	$y = 0.980 - x$
Green boundary	$y = 0.727x + 0.054$

### c) Green (also refer 2.3.2 and 2.3.3)

Yellow boundary	$x = 0.310$
-----------------	-------------

---

White boundary	$x = 0.625 \quad y = 0.041$
Blue boundary	$y = 0.400$
d) Blue	
Green boundary	$y = 1.141 \quad x = 0.037$
White boundary	$x = 0.400 - y$
Purple boundary	$x = 0.134 + 0.590y$
e) White	
Yellow boundary	$x = 0.440$
Blue boundary	$x = 0.320$
Green boundary	$y = 0.150 + 0.643x$
Purple boundary	$y = 0.050 + 0.757x$
f) Variable white	

The boundaries of variable white for solid state light sources are those of *e) White* above.

2.3.2. Where observers with defective colour vision must be able to determine the colour of the light, green signals shall be within the follow boundaries:

Yellow boundary	$y = 0.726 - 0.726x$
White boundary	$x = 0.625y - 0.041$
Blue boundary	$y = 0.400$

**Note:** Where the colour signal is to be seen from long range, it has been the practice to use colours with the boundaries of 2.1.2.

2.3.3. In order to avoid a large variation of shades of green, if colours within the boundaries below are selected, colours within the boundaries of 2.3.2 shall not be used.

Yellow boundary	$x = 0.310$
White boundary	$x = 0.625y - 0.041$
Blue boundary	$y = 0.726 - 0.726x$

2.4. Colour measurement for filament-type and solid state-type lights sources

2.4.1. The colour of aeronautical ground lights shall be verified as being within the boundaries specified in Figure A1-1a or A1-1b, as appropriate, by measurement at five points within the area limited by the innermost isocandela curve (isocandela diagrams in Appendix 2 refer), with operation at rated current or voltage. In the case of elliptical or circular isocandela curves, the colour measurements shall be taken at the centre and at the horizontal and vertical limits. In the case of rectangular isocandela curves, the colour measurements shall be taken at the centre and the limits of the diagonals (corners). In addition, the colour of the light shall be checked at the outermost isocandela curve to ensure that there is no colour shift that might cause signal confusion to the pilot.

*Note 1. — For the outermost isocandela curve, a measurement of colour coordinates should be made and recorded for review and judgement of acceptability by the State.*

*Note 2. — Certain light units may have application so that they may be viewed and used by pilots from directions beyond that of the outermost isocandela curve (e.g. stop bar lights at significantly wide runway-holding positions). In such instances, the State should assess the actual application and if necessary require a check of colour shift at angular ranges beyond the outermost curve.*

2.4.2. In the case of visual approach slope indicator systems and other light units having a colour transition sector, the colour shall be measured at points in accordance with 2.4.1, except that the colour areas shall be treated separately and no point shall be within 0.5 degrees of the transition sector.

### 3. Colours for markings, signs and panels

*Note 1. — The specifications of surface colours given below apply only to freshly coloured surfaces. Colours used for markings, signs and panels usually change with time and therefore require renewal.*

*Note 2. — Guidance on surface colours is contained in the CIE document entitled Recommendations for Surface Colours for Visual Signalling — Publication No. 39-2 (TC-106) 1983.*

*Note 3. — The specifications recommended in 3.4 for transilluminated panels are interim in nature and are based on the CIE specifications for transilluminated signs. It is intended that these specifications will be reviewed and updated as and when CIE develops specifications for transilluminated panels.*

3.1. The chromaticities and luminance factors of ordinary colours, colours of retroreflective materials and colours of transilluminated (internally illuminated) signs and panels shall be determined under the following standard conditions:

- a) angle of illumination: 45°;
- b) direction of view: perpendicular to surface; and
- c) illuminant: CIE standard illuminant D<sub>65</sub>.

3.2. The chromaticity and luminance factors of ordinary colours for markings and externally illuminated signs and panels shall be within the following boundaries when determined under standard conditions.

CIE Equations (see Figure A1-2):

a) Red	
Purple boundary	$y = 0.345 - 0.051x$
White boundary	$y = 0.910 - x$
Orange boundary	$y = 0.314 + 0.047x$
Luminance factor	$\beta = 0.07 \text{ (mnm)}$

---

b) Orange	
Red boundary	$y = 0.285 + 0.100x$
White boundary	$y = 0.940 - x$
Yellow boundary	$y = 0.250 + 0.220x$
Luminance factor	$\beta = 0.20 \text{ (mnm)}$
c) Yellow	
Orange boundary	$y = 0.108 + 0.707x$
White boundary	$y = 0.910 - x$
Green boundary	$y = 1.35x - 0.093$
Luminance factor	$\beta = 0.45 \text{ (mnm)}$
d) White	
Purple boundary	$y = 0.010 + x$
Blue boundary	$y = 0.610 - x$
Green boundary	$y = 0.030 + x$
Yellow boundary	$y = 0.710 - x$
Luminance factor	$\beta = 0.75 \text{ (mnm)}$
e) Black	
Purple boundary	$y = x - 0.030$
Blue boundary	$y = 0.570 - x$
Green boundary	$y = 0.050 + x$
Yellow boundary	$y = 0.740 - x$
Luminance factor	$\beta = 0.03 \text{ (max)}$
f) Yellowish green	
Green boundary	$y = 1.317x + 0.4$
White boundary	$y = 0.910 - x$
Yellow boundary	$y = 0.867x + 0.4$
g) Green	
Yellow boundary	$x = 0.313$
White boundary	$y = 0.243 + 0.670x$
Blue boundary	$y = 0.493 - 0.524x$
Luminance factor	$\beta = 0.10 \text{ (mnm)}$

*Note. — The small separation between surface red and surface orange is not sufficient to ensure the distinction of these colours when seen separately.*

3.3. The chromaticity and luminance factors of colours of retroreflective materials for markings, signs and panels shall be within the following boundaries when determined under standard conditions.

CIE Equations (see Figure A1-3):

a) Red	
Purple boundary	$y = 0.345 - 0.051x$

---

White boundary	$y = 0.910 - x$
Orange boundary	$y = 0.314 + 0.047x$
Luminance factor	$\beta = 0.03 \text{ (mnm)}$
b) Orange	
Red boundary	$y = 0.265 + 0.205x$
White boundary	$y = 0.910 - x$
Yellow boundary	$y = 0.207 + 0.390x$
Luminance factor	$\beta = 0.14 \text{ (mnm)}$
c) Yellow	
Orange boundary	$y = 0.160 + 0.540x$
White boundary	$y = 0.910 - x$
Green boundary	$y = 1.35x - 0.093$
Luminance factor	$\beta = 0.16 \text{ (mnm)}$
d) White	
Purple boundary	$y = x$
Blue boundary	$y = 0.610 - x$
Green boundary	$y = 0.040 + x$
Yellow boundary	$y = 0.710 - x$
Luminance factor	$\beta = 0.27 \text{ (mnm)}$
e) Blue	
Green boundary	$y = 0.118 + 0.675x$
White boundary	$y = 0.370 - x$
Purple boundary	$y = 1.65x - 0.187$
Luminance factor	$\beta = 0.01 \text{ (mnm)}$
f) Green	
Yellow boundary	$y = 0.711 - 1.22x$
White boundary	$y = 0.243 + 0.670x$
Blue boundary	$y = 0.405 - 0.243x$
Luminance factor	$\beta = 0.03 \text{ (mnm)}$

3.4. The chromaticity and luminance factors of colours for luminescent or transilluminated (internally illuminated) signs and panels shall be within the following boundaries when determined under standard conditions.

CIE Equations (see Figure A1-4):

a) Red

Purple boundary	$y = 0.345 - 0.051x$
White boundary	$y = 0.910 - x$
Orange boundary	$y = 0.314 + 0.047x$
Luminance factor (Day condition)	$\beta = 0.07 \text{ (mnm)}$
Relative luminance to white (Night condition)	5% (mnm) 20% (max)

## b) Yellow

Orange boundary	$y = 0.108 + 0.707x$
White boundary	$y = 0.910 - x$
Green boundary	$y = 1.35x - 0.093$
Luminance factor (Day condition)	$\beta = 0.45 \text{ (mnm)}$
Relative luminance to white (Night condition)	30% (mnm) 80% (max)

## c) White


Purple boundary	$y = 0.010 + x$
Blue boundary	$y = 0.610 - x$
Green boundary	$y = 0.030 + x$
Yellow boundary	$y = 0.710 - x$
Luminance factor (Day condition)	$\beta = 0.75 \text{ (mnm)}$
Relative luminance to white (Night condition)	100%


## d) Black

Purple boundary	$y = x - 0.030$
Blue boundary	$y = 0.570 - x$
Green boundary	$y = 0.050 + x$
Yellow boundary	$y = 0.740 - x$
Luminance factor (Day condition)	$\beta = 0.03 \text{ (max)}$
Relative luminance to white (Night condition)	0% (mnm) 2% (max)


## e) Green

Yellow boundary	$x = 0.313$
White boundary	$y = 0.243 + 0.670x$
Blue boundary	$y = 0.493 - 0.524x$
Luminance factor (Day condition)	$\beta = 0.10 \text{ (mnm)}$
Relative luminance to white (Night condition)	5% (mnm) 30% (max)

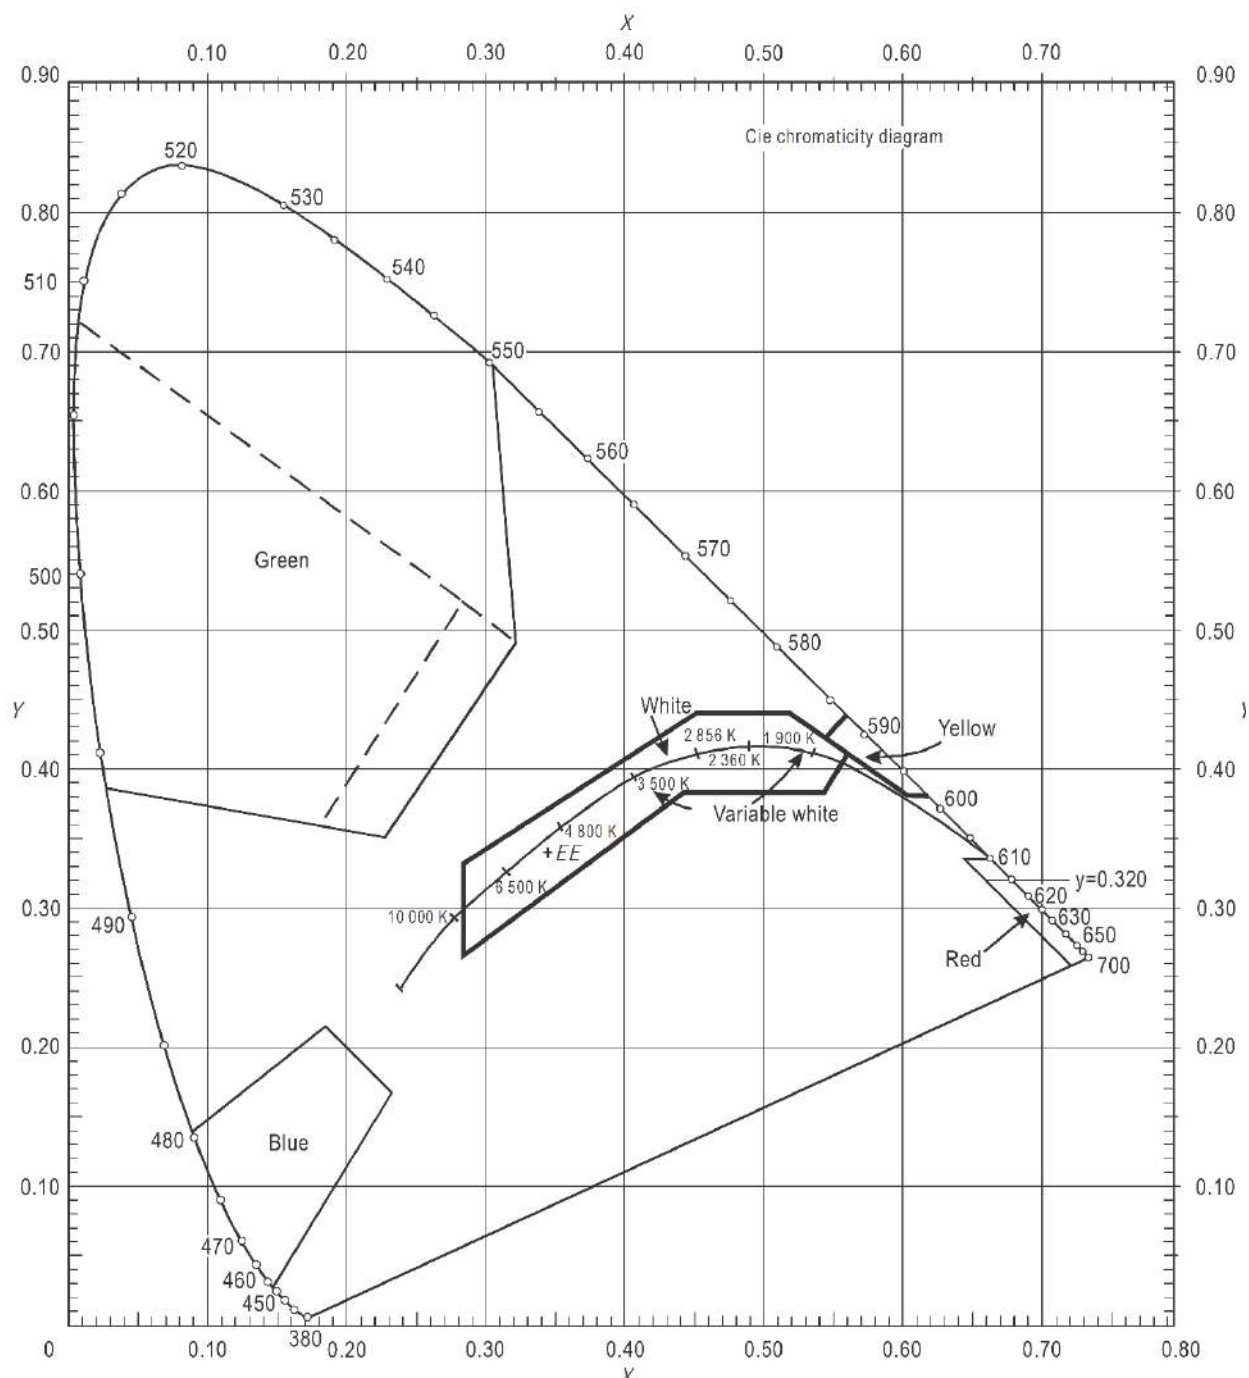
**Figure A1-1a. Colour for aeronautical ground lights (filament-type lamps)**

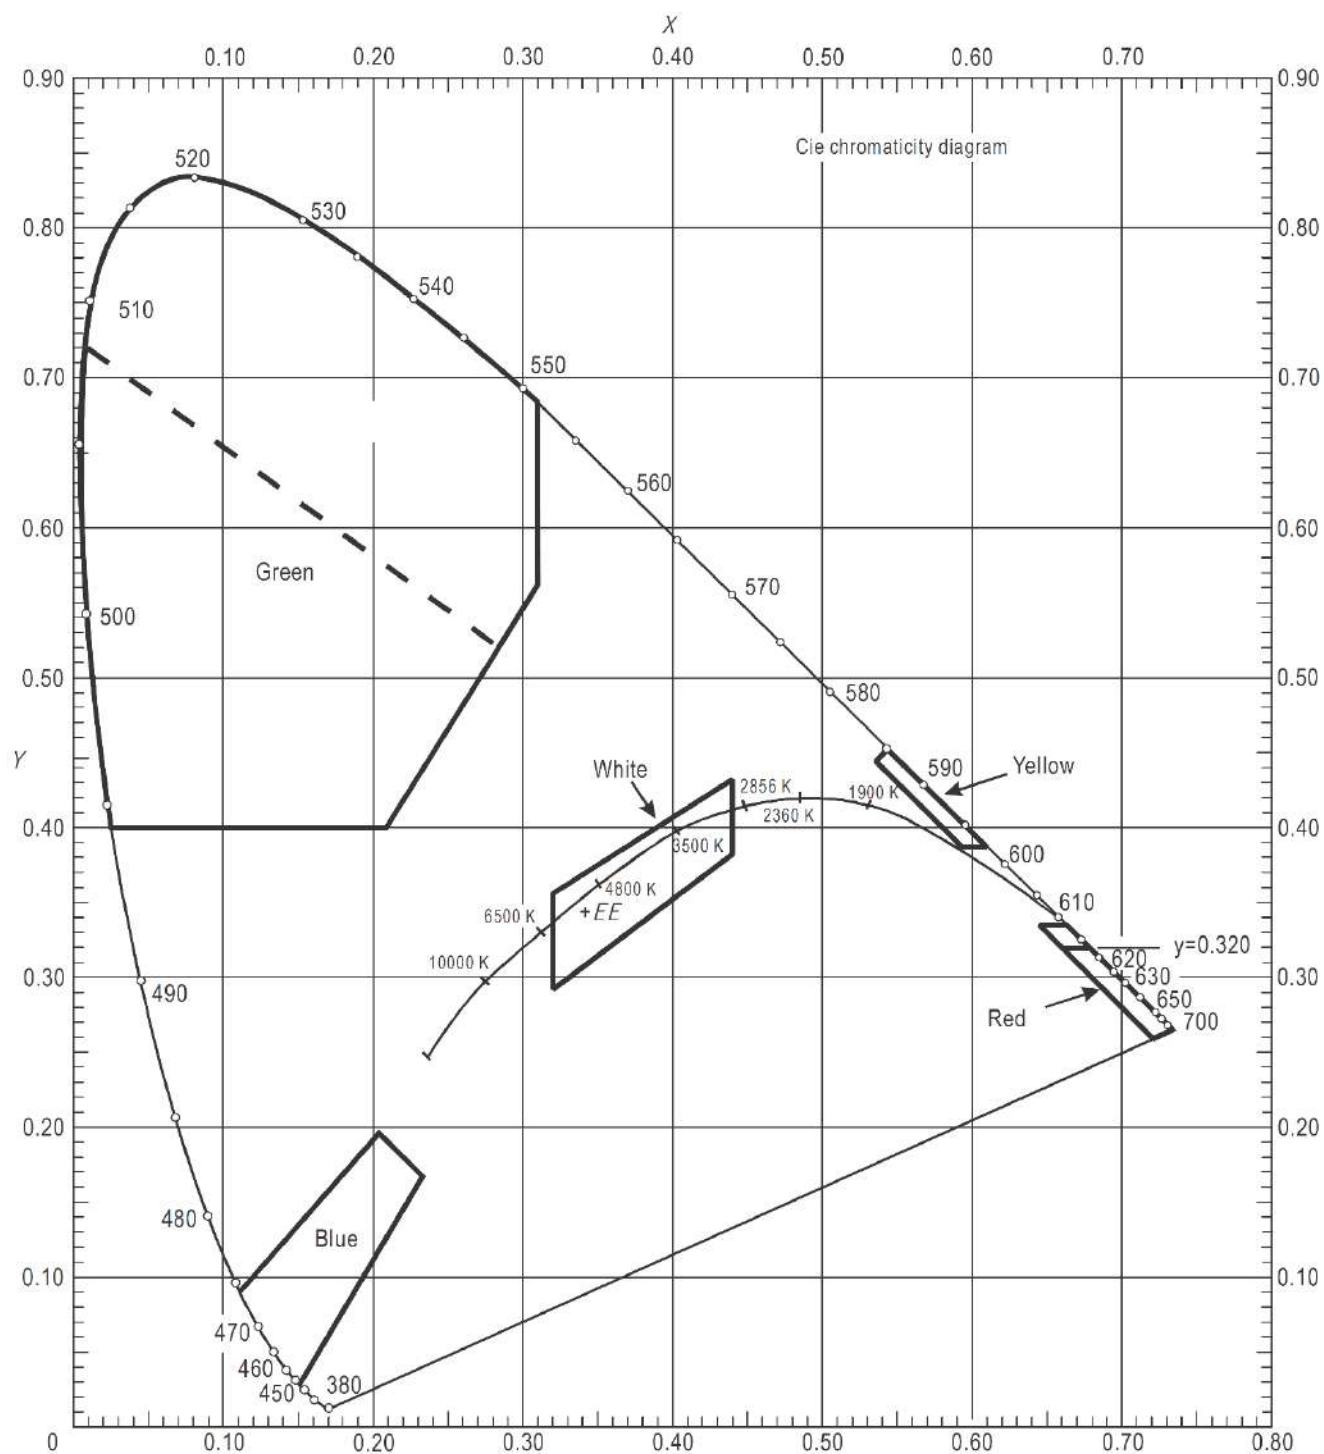**Figure A1-1b. Colour for aeronautical ground lights (solid state lighting)**




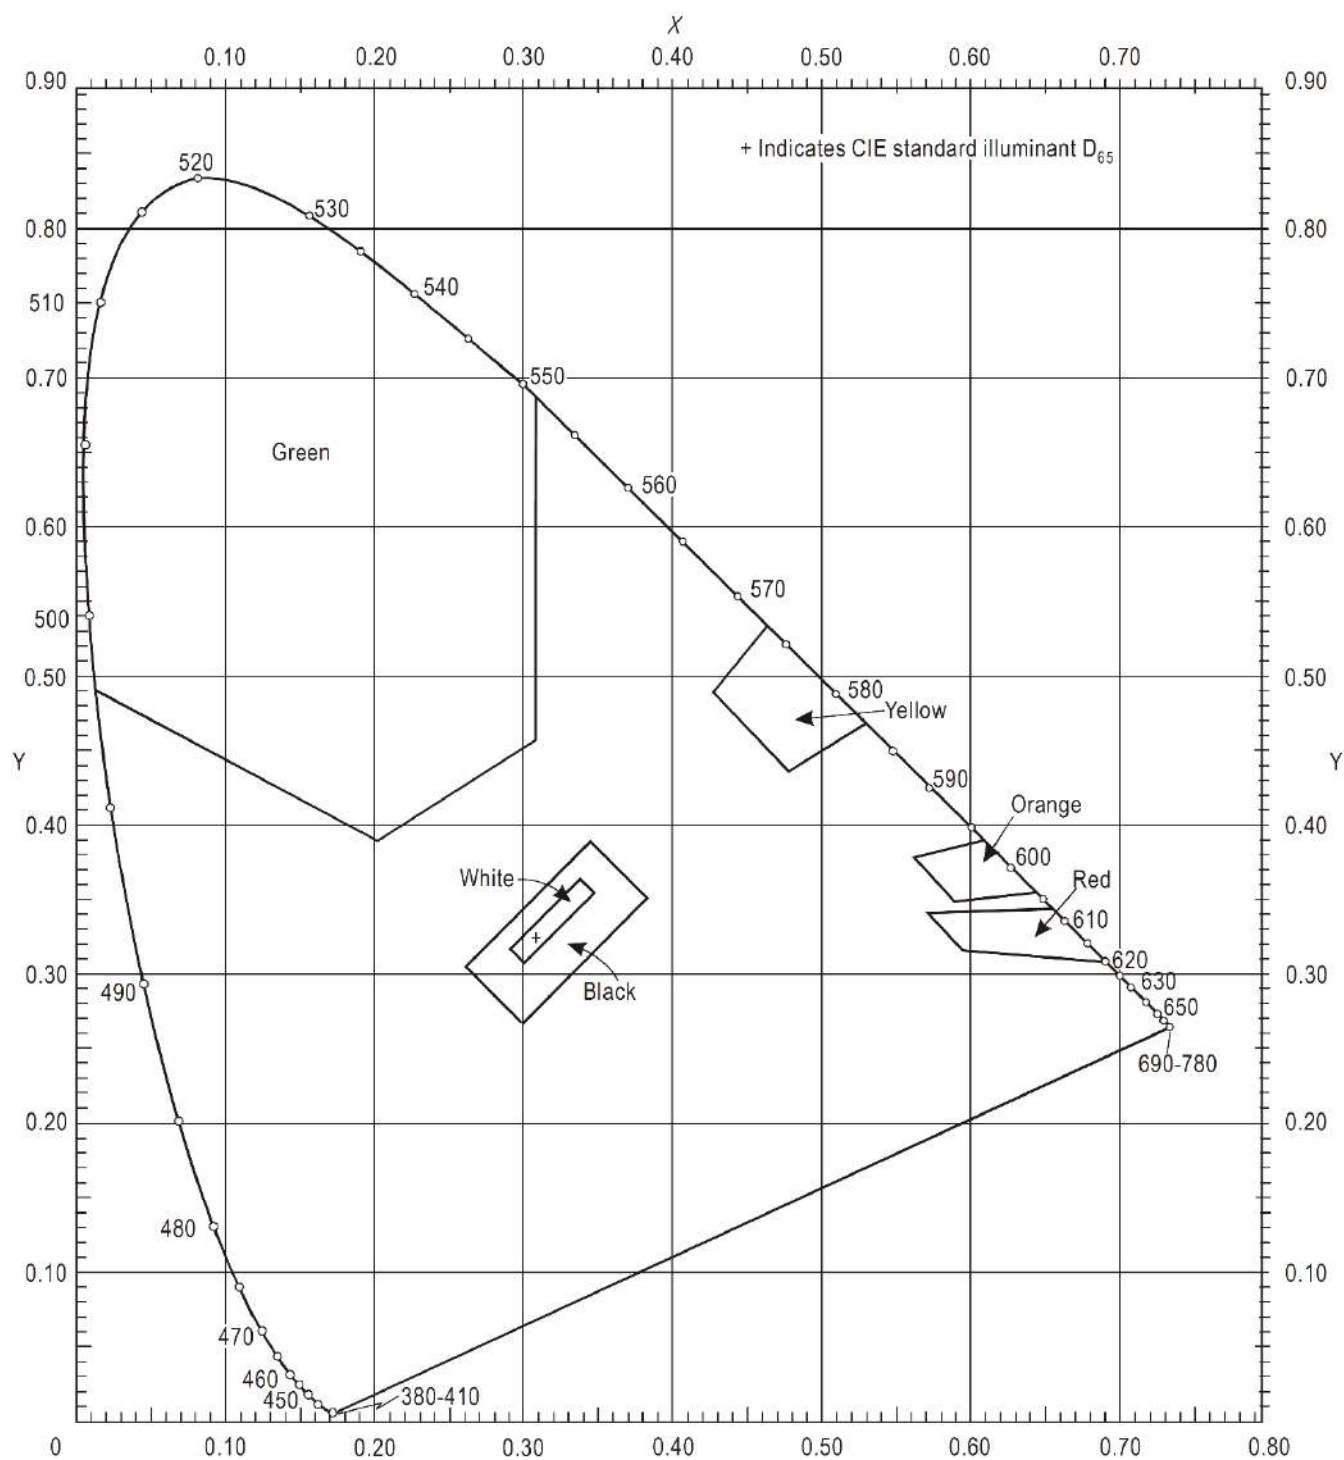

**Figure A1-2. Ordinary Colours for Markings and Externally Illuminated Signs and Panels**

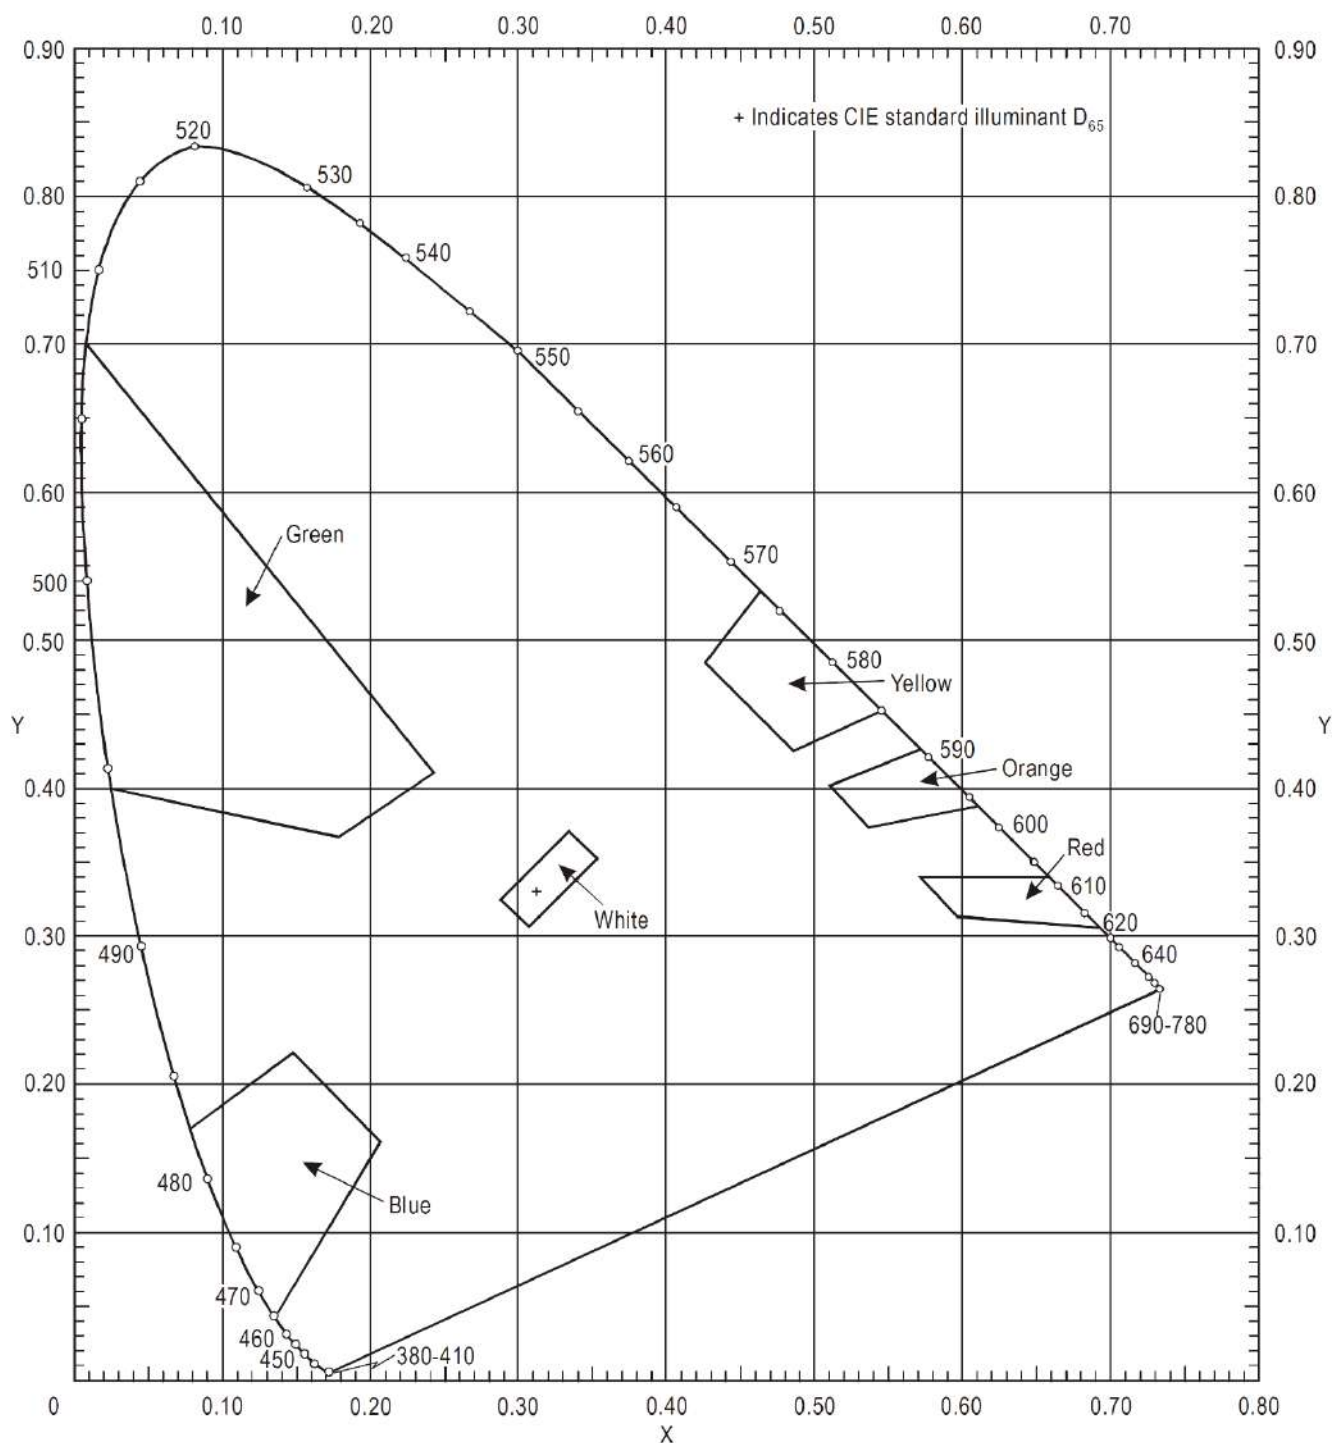


**Figure A1-3. Colours of retroreflective materials for markings, signs and panels**

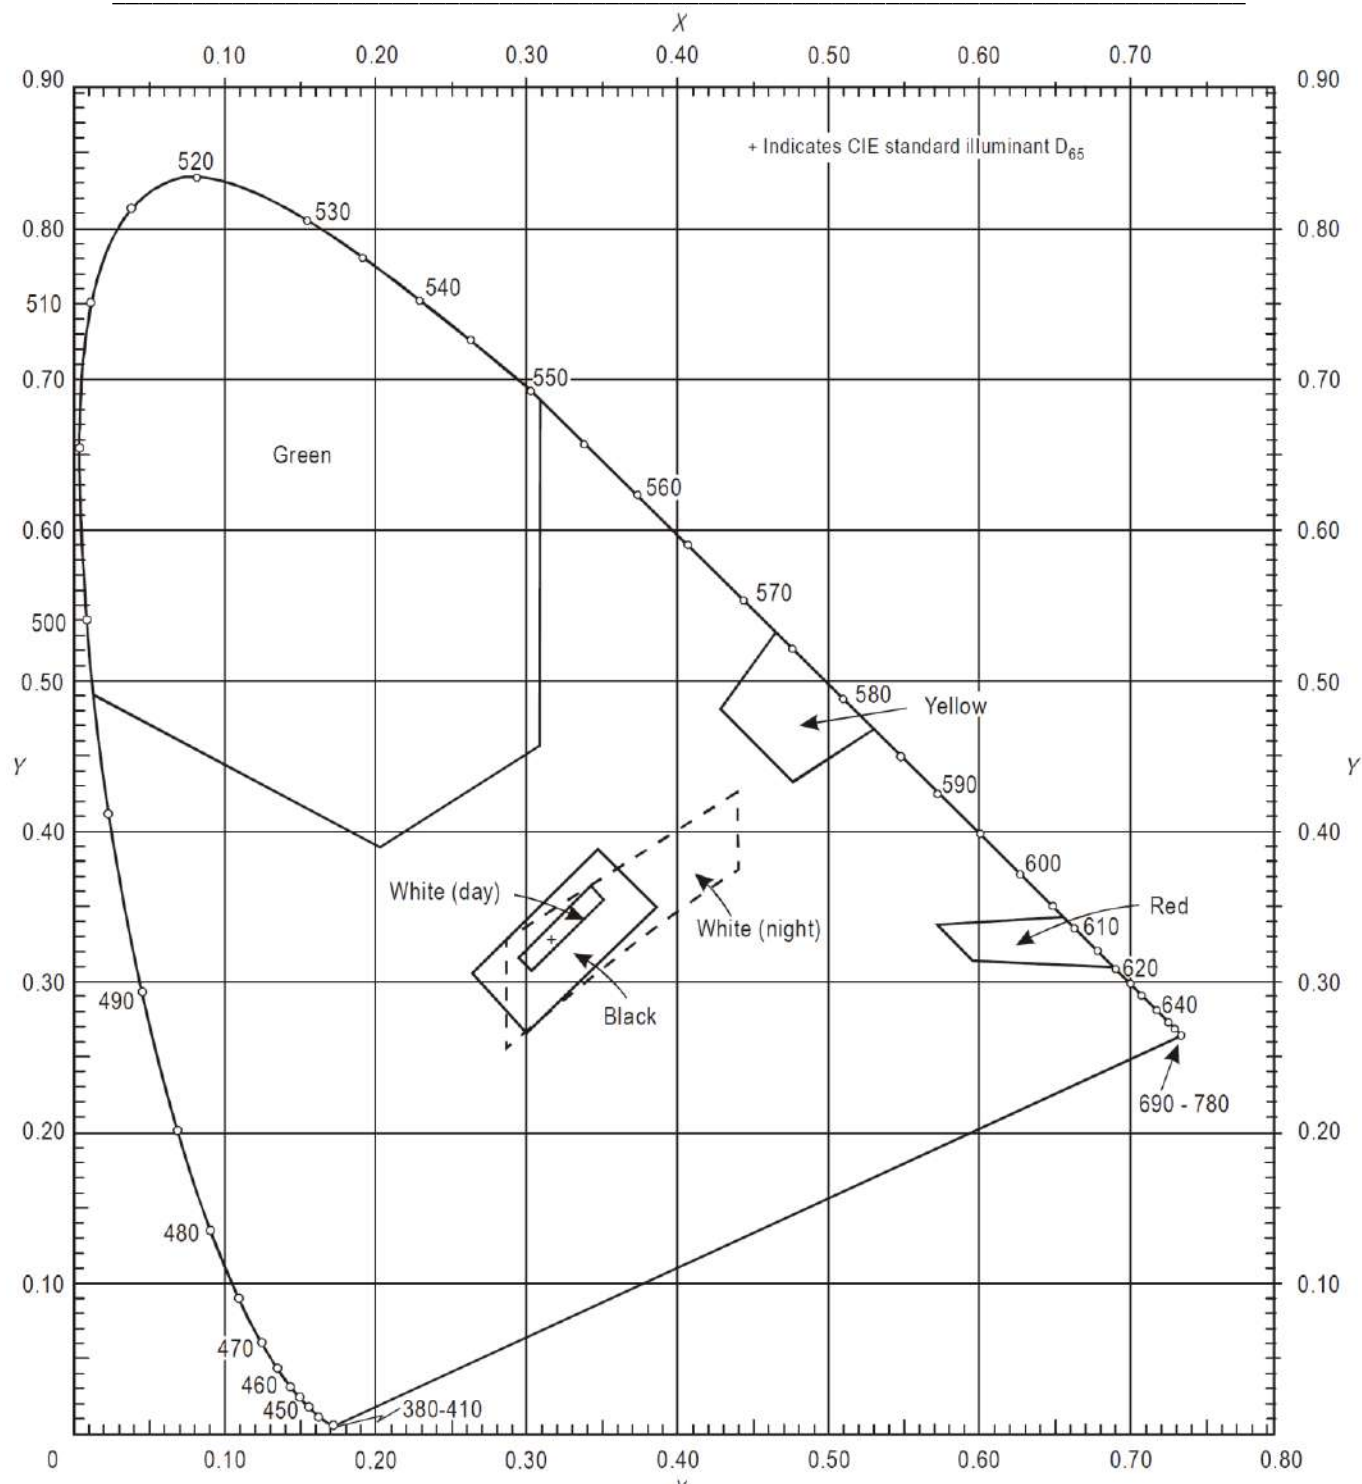

**Figure A1-4. Colours of luminescent or trans-illuminated (internally illuminated) signs and panels**

## APPENDIX 2. AERONAUTICAL GROUND LIGHT CHARACTERISTICS

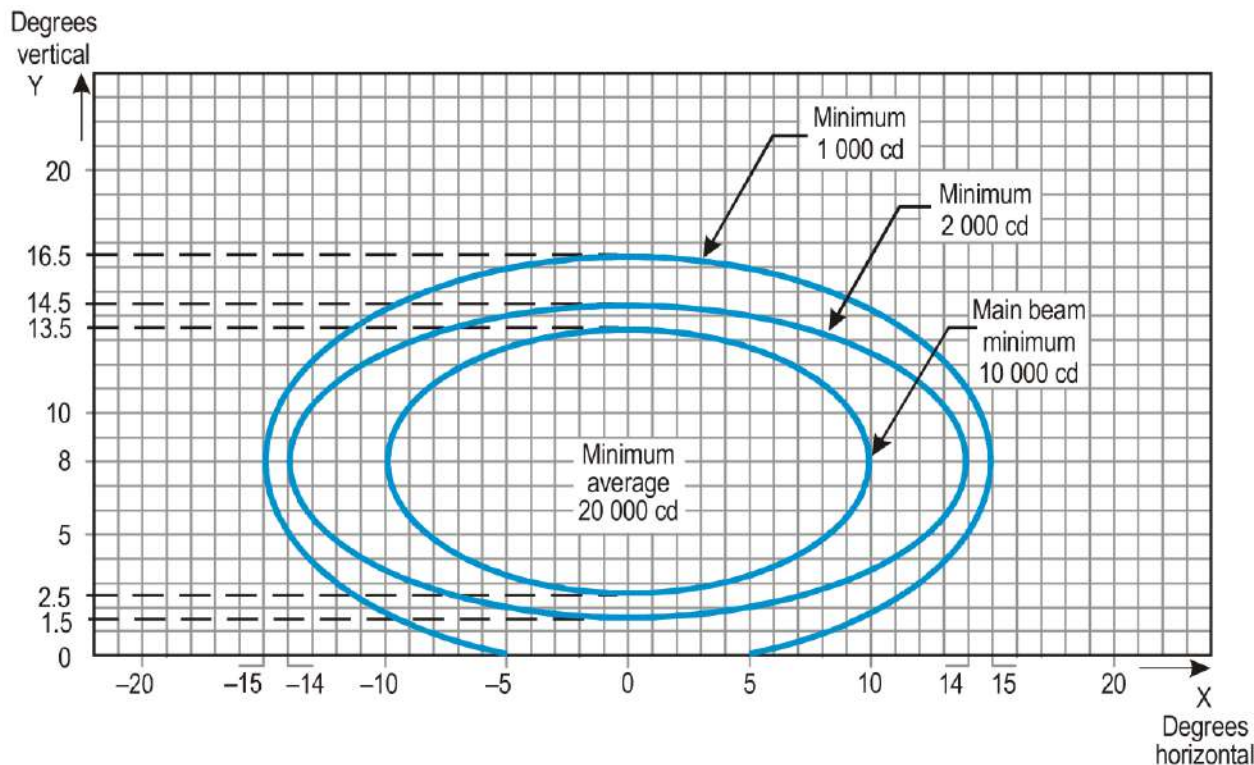

Notes:

1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$


a	10	14	15
b	5.5	6.5	8.5

2. Vertical setting angles of the lights shall be such that the following vertical coverage of the main beam will be met:

distance from threshold	vertical main beam coverage
threshold to 315 m	0° — 11°
316 m to 475 m	0.5° — 11.5°
476 m to 640 m	1.5° — 12.5°
641 m and beyond	2.5° — 13.5° (as illustrated above)

3. Lights in crossbars beyond 22.5 m from the centre line shall be toed-in 2 degrees. All other lights shall be aligned parallel to the centre line of the runway.
4. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-1. Isocandela diagram for approach centre line light and crossbars (white light)**

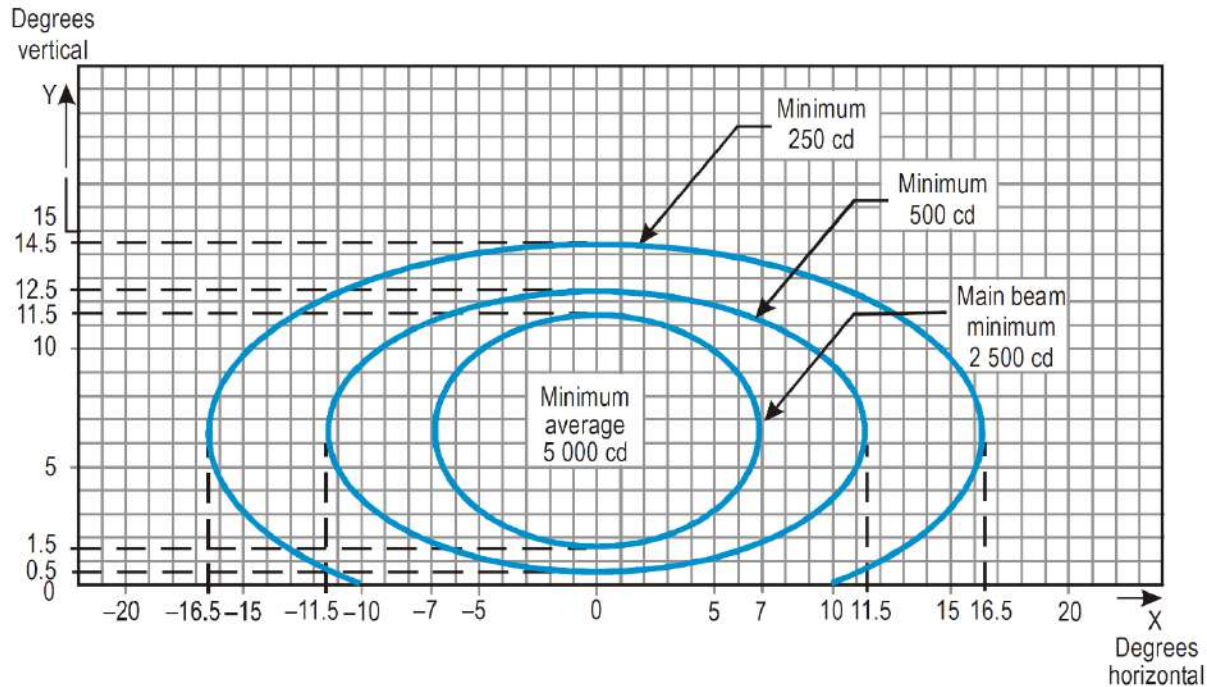

Notes:

1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	7.0	11.5	16.5
b	5.0	6.0	8.0


2. Toe-in 2 degrees
3. Vertical setting angles of the lights shall be such that the following vertical coverage of the main beam will be met:

distance from threshold	vertical main beam coverage
threshold to 115 m	0.5° — 10.5°
116 m to 215 m	1° — 11°
216 m and beyond	1.5° — 11.5° (as illustrated above)

4. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-2. Isocandela diagram for approach side row light (red light)**



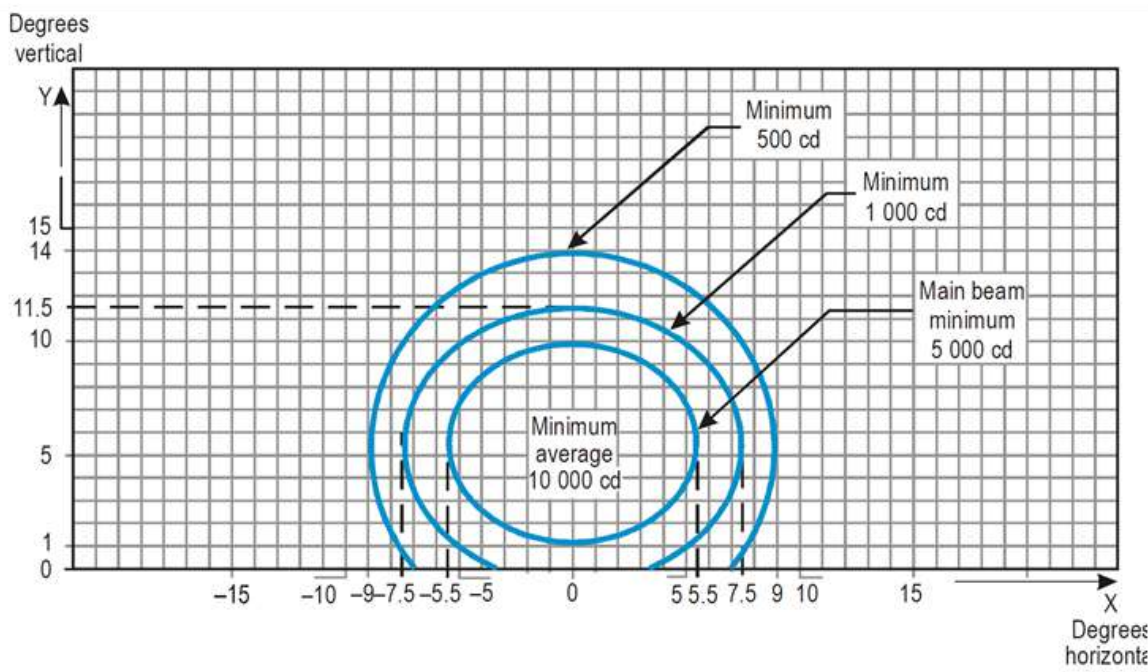

Notes:

1. Curves calculated on formula


$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	5.5	7.5	9.0
b	4.5	6.0	8.5

2. Toe-in 3.5 degrees

3. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-3. Isocandela diagram for threshold light (green light)**

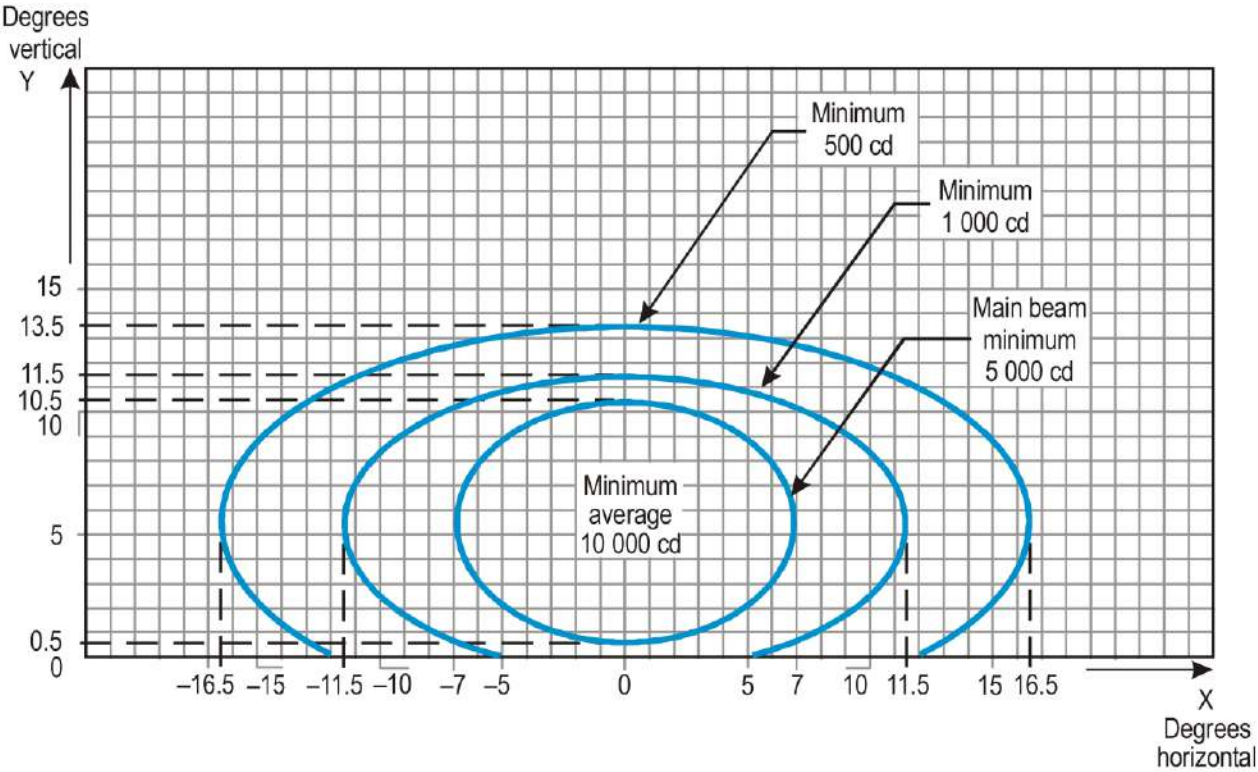

Notes:


1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	7.0	11.5	16.5
b	5.0	6.0	8.0

2. Toe-in 2 degrees
3. See collective notes for Figures A2-1 to A2-11 and A2-26.

Figure A2-4. Isocandela diagram for threshold wing bar light (green light)

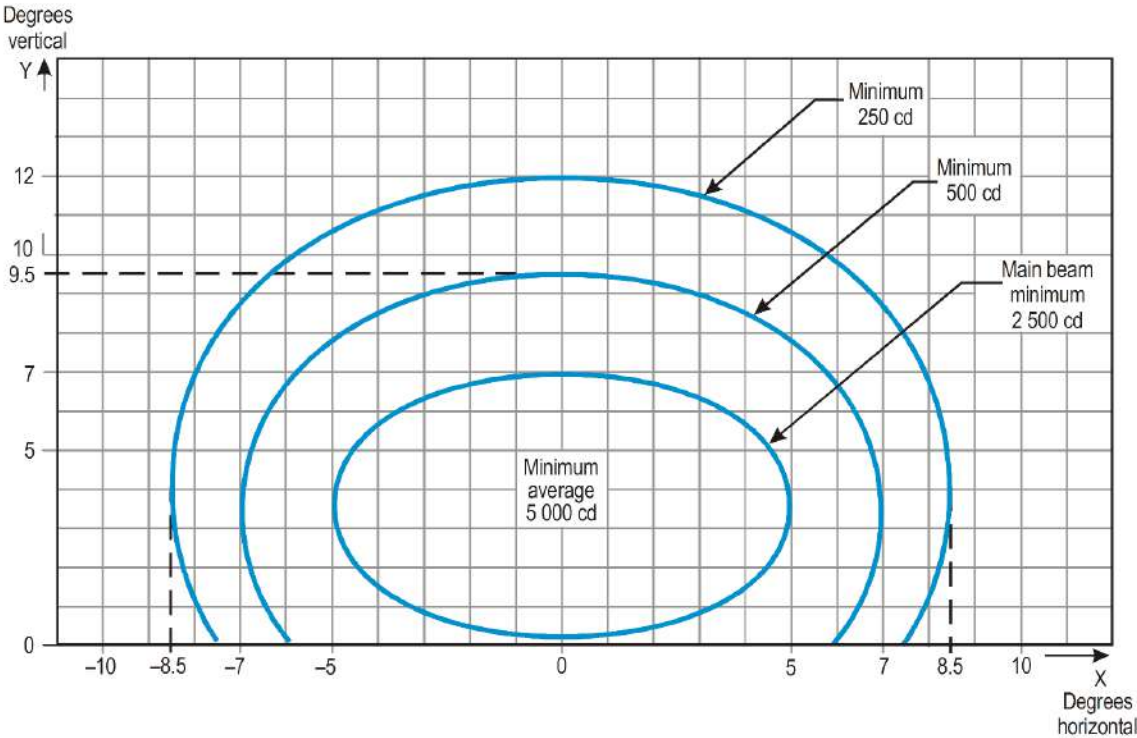

Notes:

1. Curves calculated on formula


$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	5.0	7.0	8.5
b	3.5	6.0	8.5

- 2. For red light, multiply values by 0.15.
- 3. For yellow light, multiply values by 0.40.
- 4. See collective notes for Figures A2-1 to A2-11 and A2-26.

Figure A2-5. Isocandela diagram for touchdown zone light (white light)



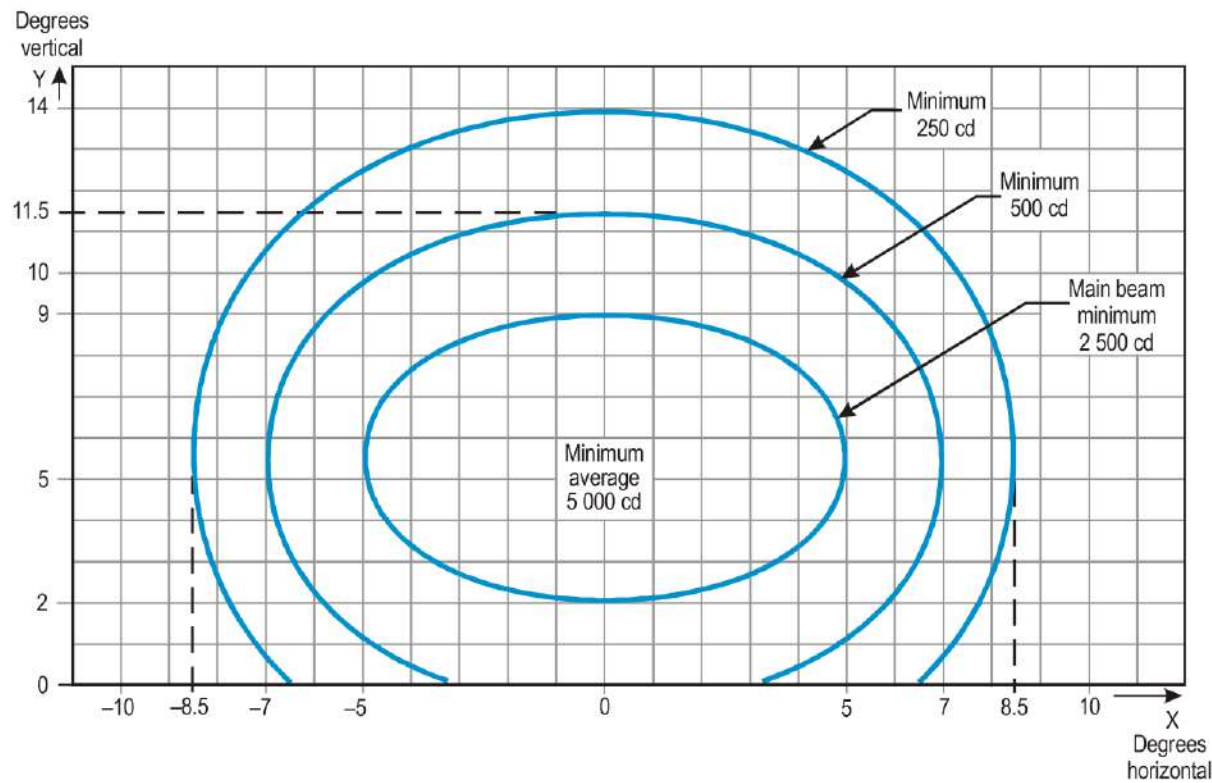

Notes:

1. Curves calculated on formula


$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	5.0	7.0	8.5
b	3.5	6.0	8.5

2. Toe-in 4 degrees

3. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-6. Isocandela diagram for runway centre line light with 30 m longitudinal spacing (white light) and rapid exit taxiway indicator light (yellow light)**

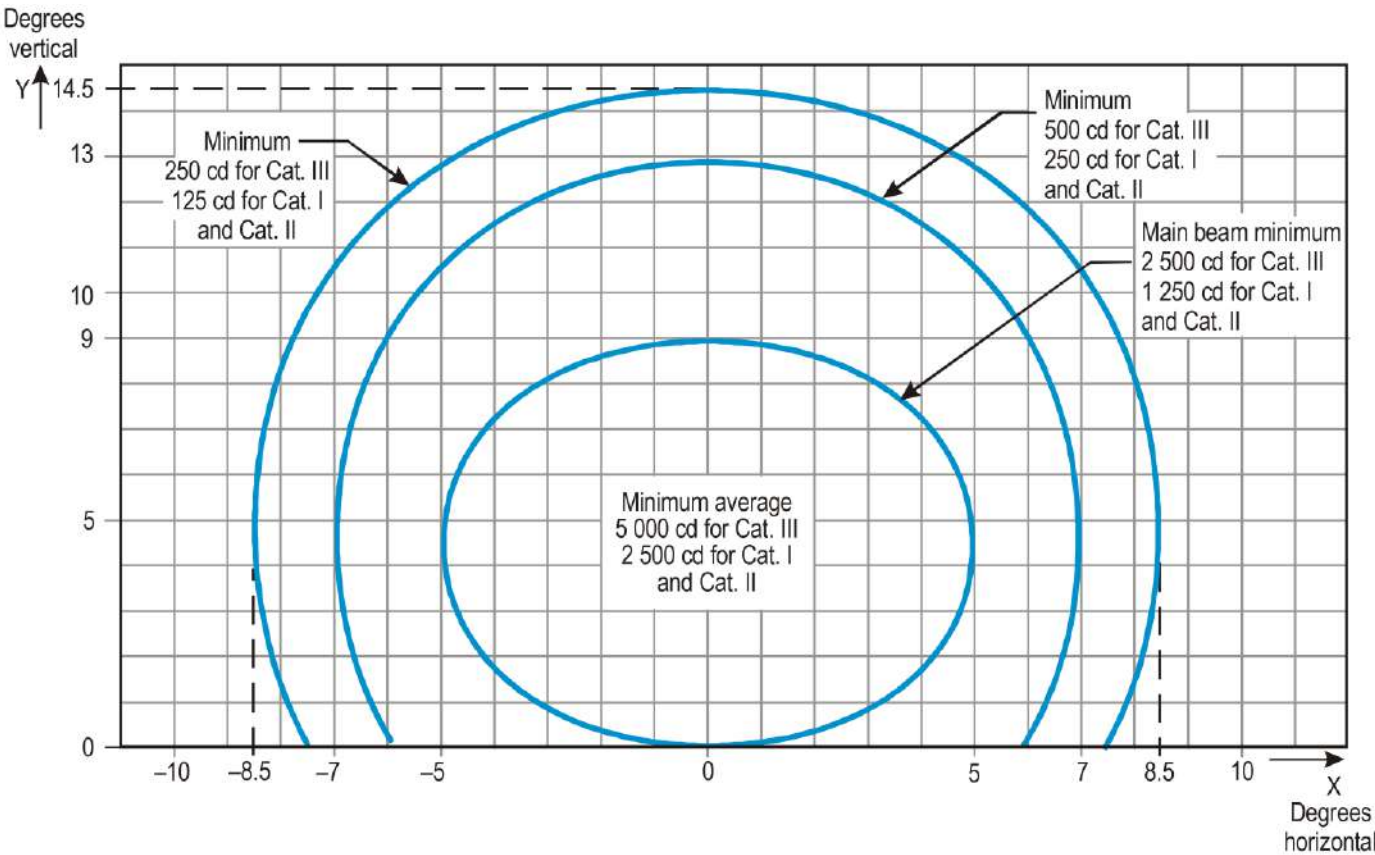

Notes:


1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	5.0	7.0	8.5
b	4.5	8.5	10

- 2. For red light, multiply values by 0.15.
- 3. For yellow light, multiply values by 0.40.
- 4. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-7. Isocandela diagram for runway centre line light with 15 m longitudinal spacing (white light) and rapid exit taxiway indicator light (yellow light)**

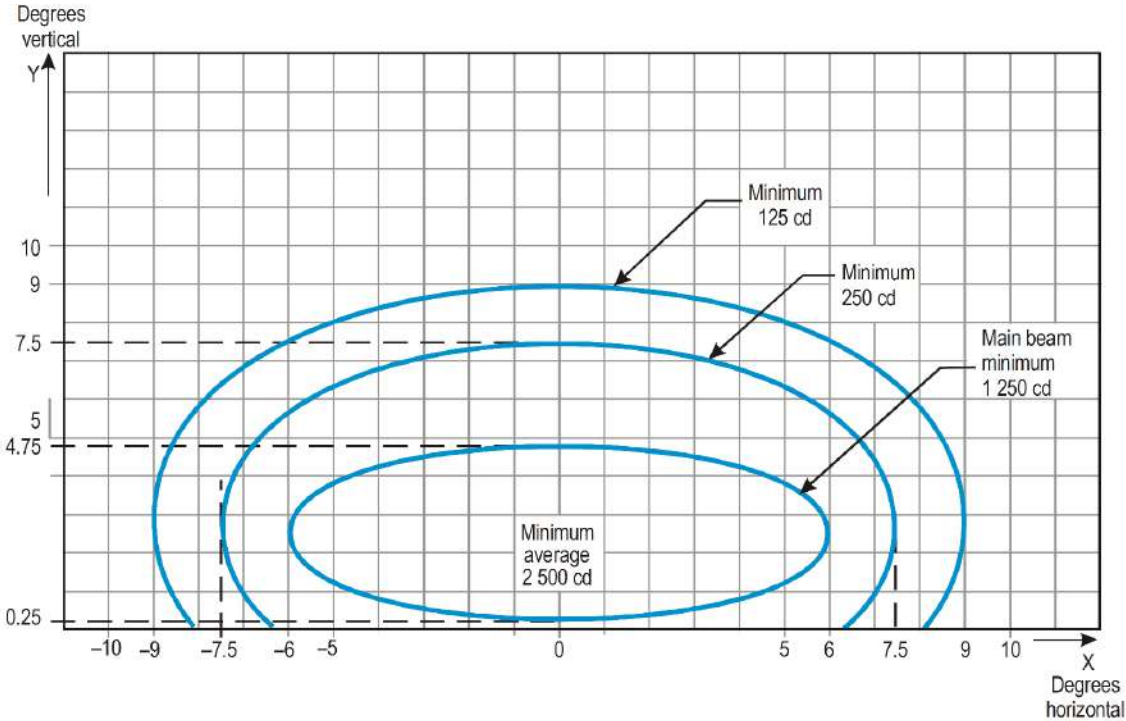

Notes:


1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	6.0	7.5	9.0
b	2.25	5.0	6.5

2. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-8. Isocandela diagram for runway end light (red light)**

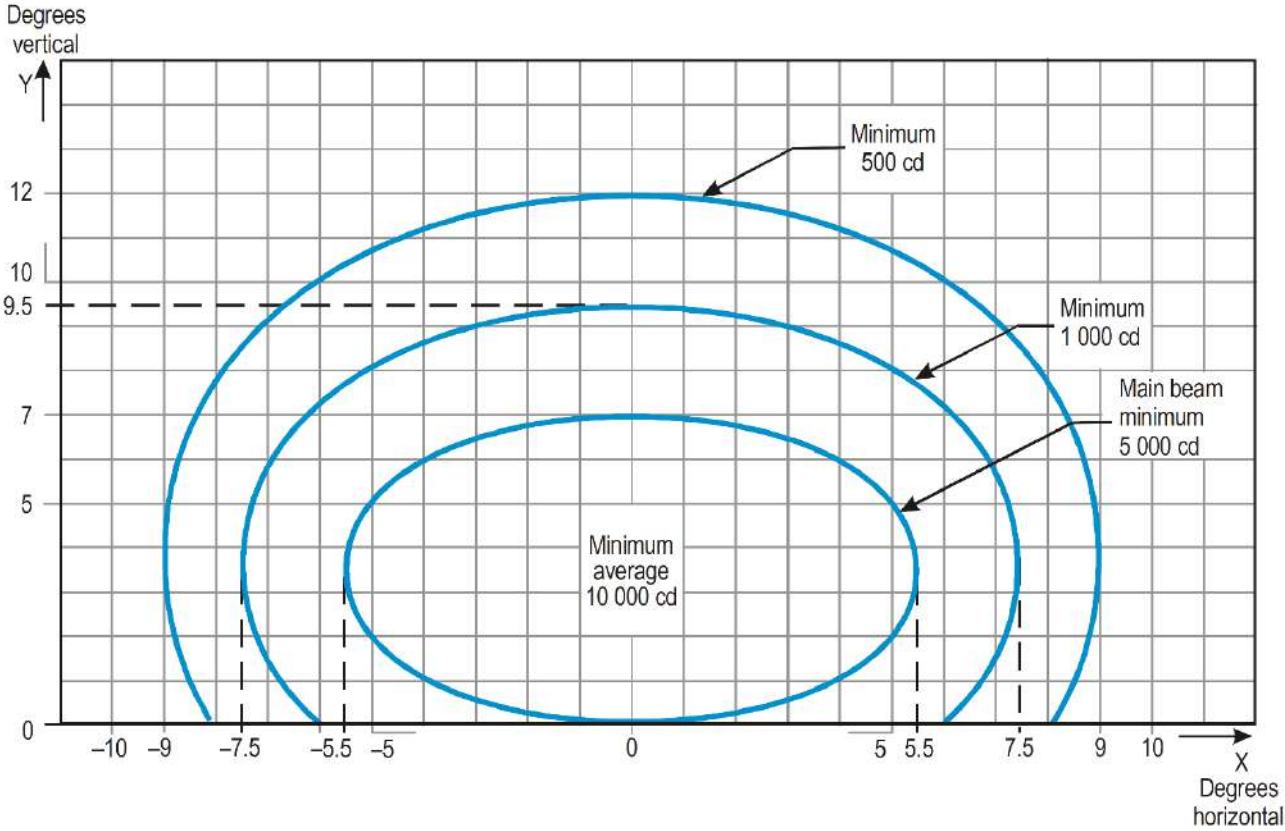

Notes:


1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	5.5	7.5	9.0
b	3.5	6.0	8.5

- 2. Toe-in 3.5 degrees
- 3. For red light, multiply values by 0.15.
- 4. For yellow light, multiply values by 0.40.
- 5. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-9. Isocandela diagram for runway edge light where width of runway is 45 m (white light)**

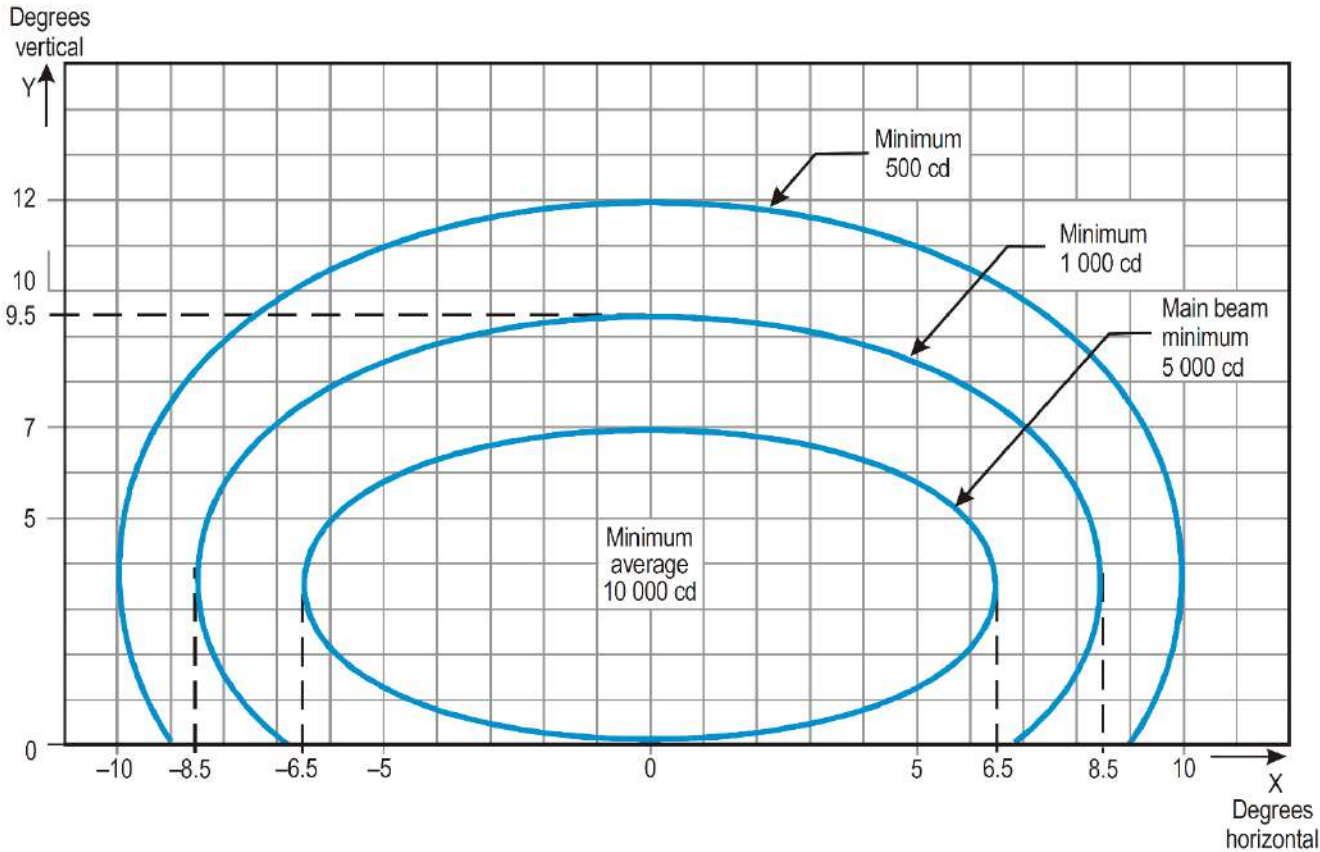

Notes:


1. Curves calculated on formula

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

a	6.5	8.5	10.0
b	3.5	6.0	8.5

2. Toe-in 4.5 degrees
3. For red light, multiply values by 0.15.
4. For yellow light, multiply values by 0.40.
5. See collective notes for Figures A2-1 to A2-11 and A2-26.

**Figure A2-10. Isocandela diagram for runway edge light where width of runway is 60 m (white light)**

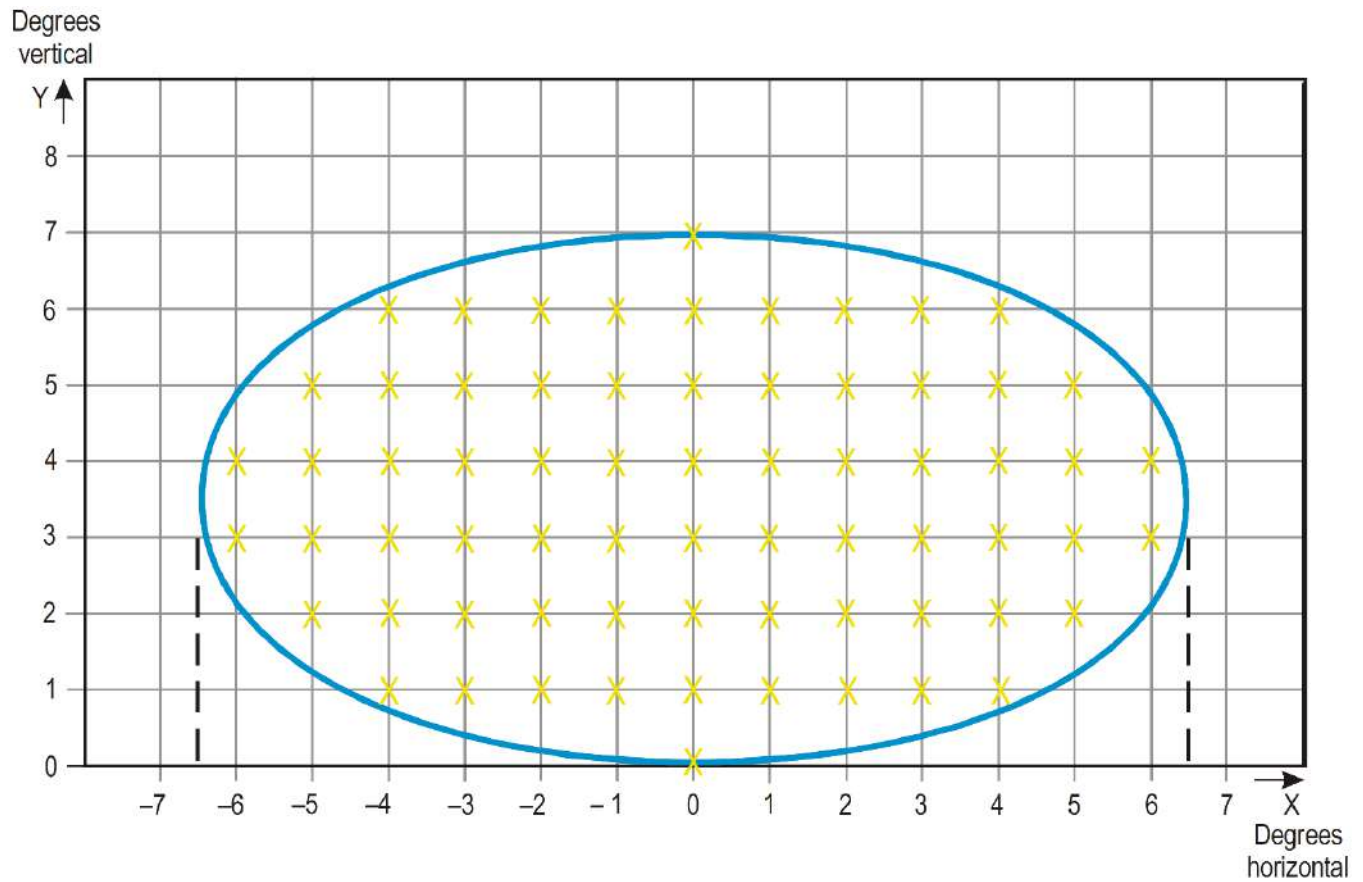

**Figure A2-11. Grid points to be used for the calculation of average intensity of approach and runway lights**

---

Collective notes to Figures A2-1 to A2-11

1. The ellipses in each figure are symmetrical about the common vertical and horizontal axes.
2. Figures A2-1 to A2-10 show the minimum allowable light intensities. The average intensity of the main beam is calculated by establishing grid points as shown in Figure A2-11 and using the intensity value measures at all grid points located within and on the perimeter of the ellipse representing the main beam. The average value is the arithmetic average of light intensities measured at all considered grid points.
3. No deviations are acceptable in the main beam pattern when the lighting fixture is properly aimed.
4. Average intensity ratio. The ratio between the average intensity within the ellipse defining the main beam of a typical new light and the average light intensity of the main beam of a new runway edge light shall be as follows:

Figure A2-1	Approach centre line and crossbars	1.5 to 2.0 (white light)
Figure A2-2	Approach side row	0.5 to 1.0 (red light)
Figure A2-3	Threshold	1.0 to 1.5 (green light)
Figure A2-4	Threshold wing bar	1.0 to 1.5 (green light)
Figure A2-5	Touchdown zone	0.5 to 1.0 (white light)
Figure A2-6	Runway centre line (longitudinal spacing 30m)	0.5 to 1.0 (white light)
Figure A2-7	Runway centre line (longitudinal spacing 15m)	0.5 to 1.0 for CAT III (white light) 0.25 to 0.5 for CAT I, II (white light)
Figure A2-8	Runway end	0.25 to 0.5 (red light)
Figure A2-9	Runway edge (45m runway width)	1.0 (white light)
Figure A2-10	Runway edge (60m runway width)	1.0 (white light)

5. The beam coverages in the figures provide the necessary guidance for approaches down to an RVR of the order of 150 m and take-offs down to an RVR of the order of 100 m.
6. Horizontal angles are measured with respect to the vertical plane through the runway centre line. For lights other than centre line lights, the direction towards the runway centre line is considered positive. Vertical angles are measured with respect to the horizontal plane.
7. Where, for approach centre line lights and crossbars and for approach side row lights, inset lights are used in lieu of elevated lights, e.g. on a runway with a displaced threshold,

---

the intensity requirements can be met by installing two or three fittings (lower intensity) at each position.

8. The importance of adequate maintenance cannot be overemphasized. The average intensity shall never fall to a value less than 50 per cent of the value shown in the figures, and it shall be the aim of airport authorities to maintain a level of light output close to the specified minimum average intensity.

9. The light unit shall be installed so that the main beam is aligned within one-half degree of the specified requirement.




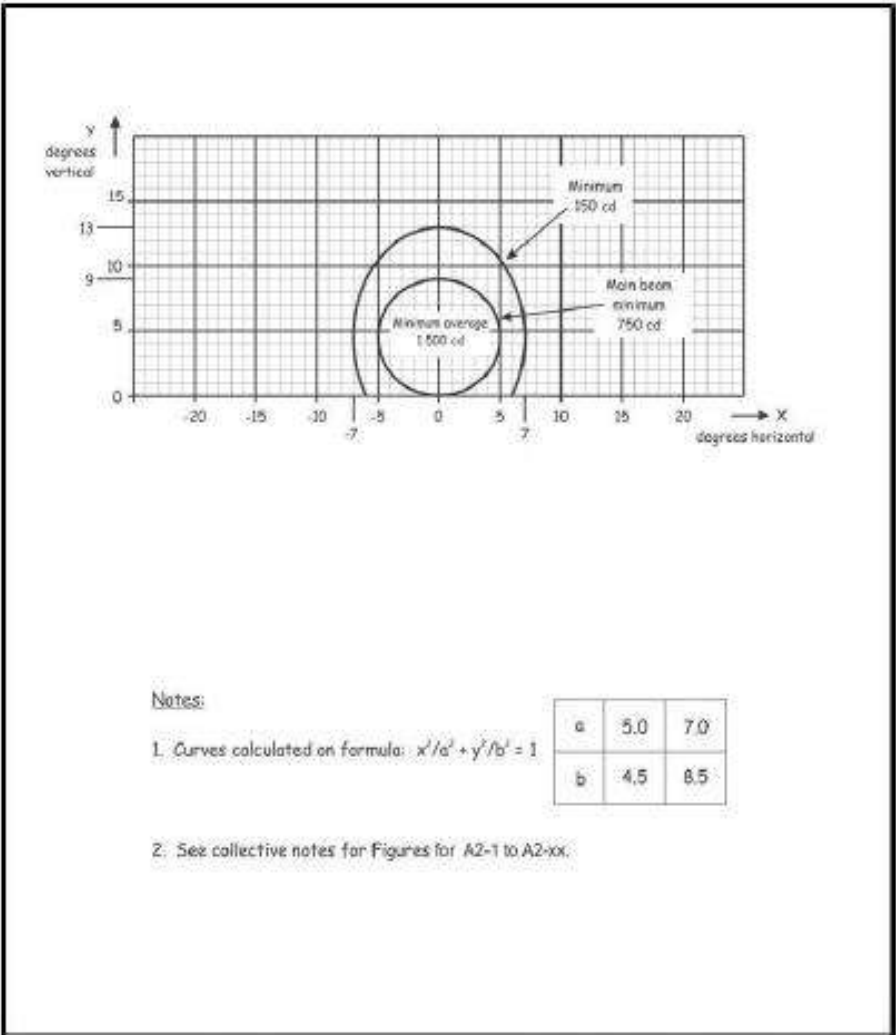



Figure A2-x. Isocandela diagram for take-off and hold lights (THL) (red light)

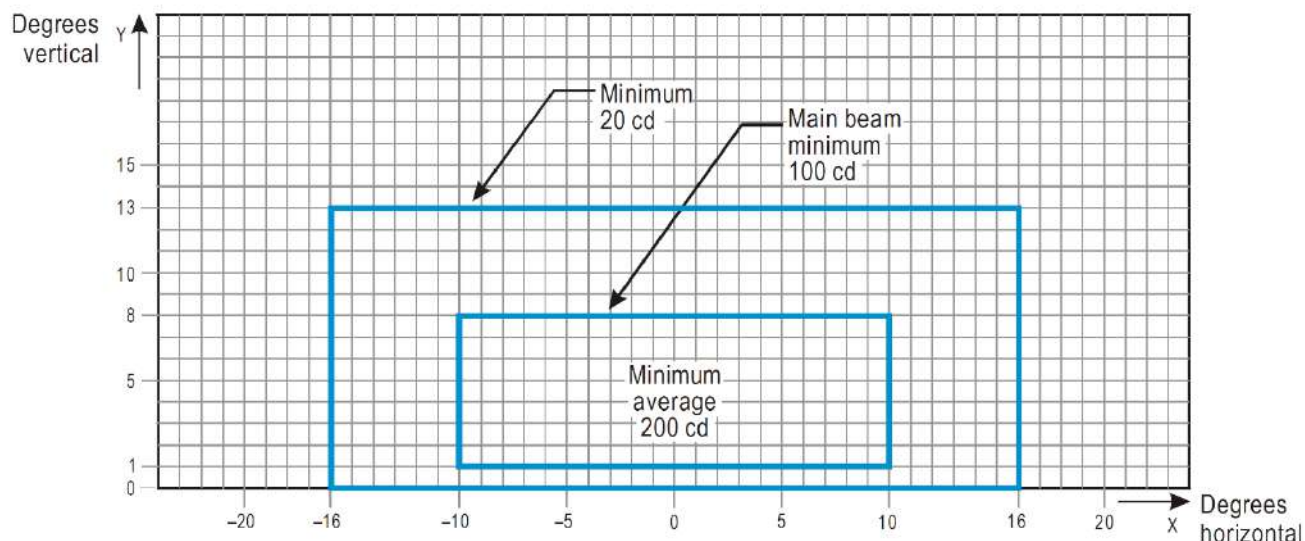

## Notes:

1. These beam coverages allow for displacement of the cockpit from the centre line up to distances of the order of 12 m and are intended for use before and after curves.
2. See collective notes for Figures A2-12 to A2-21.
3. Increased intensities for enhanced rapid exit taxiway centre line lights as recommended in 5.3.16.9 are four times the respective intensities in the figure (i.e. 800 cd for minimum average main beam).


**Figure A2-12. Isocandela diagram for taxiway centre line (15 m spacing), RELs, no-entry bar and stop bar lights in straight sections intended for use in runway visual range conditions of less than a value of 350 m where large offsets can occur and for low-intensity runway guard lights, Configuration B**

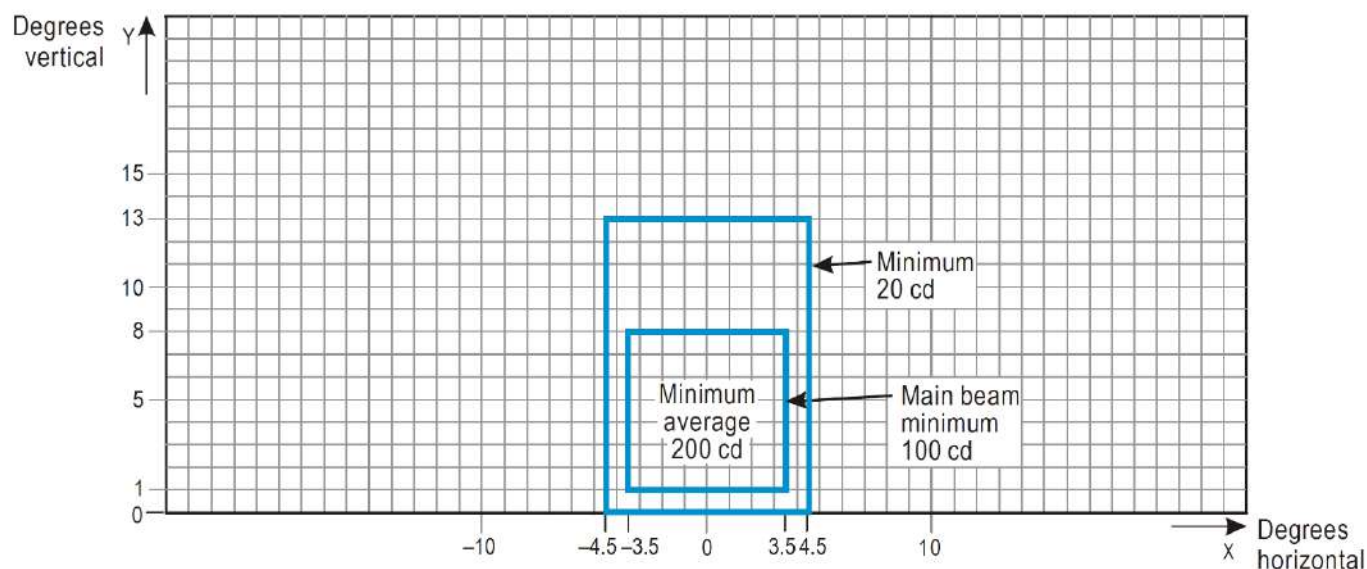

## Notes:

1. These beam coverages are generally satisfactory and cater for a normal displacement of the cockpit from the centre line of approximately 3 m.
2. See collective notes for Figures A2-12 to A2-21.


**Figure A2-13. Isocandela diagram for taxiway centre line (15 m spacing), no-entry bar and stop bar lights in straight sections intended for use in runway visual range conditions of less than a value of 350 m**

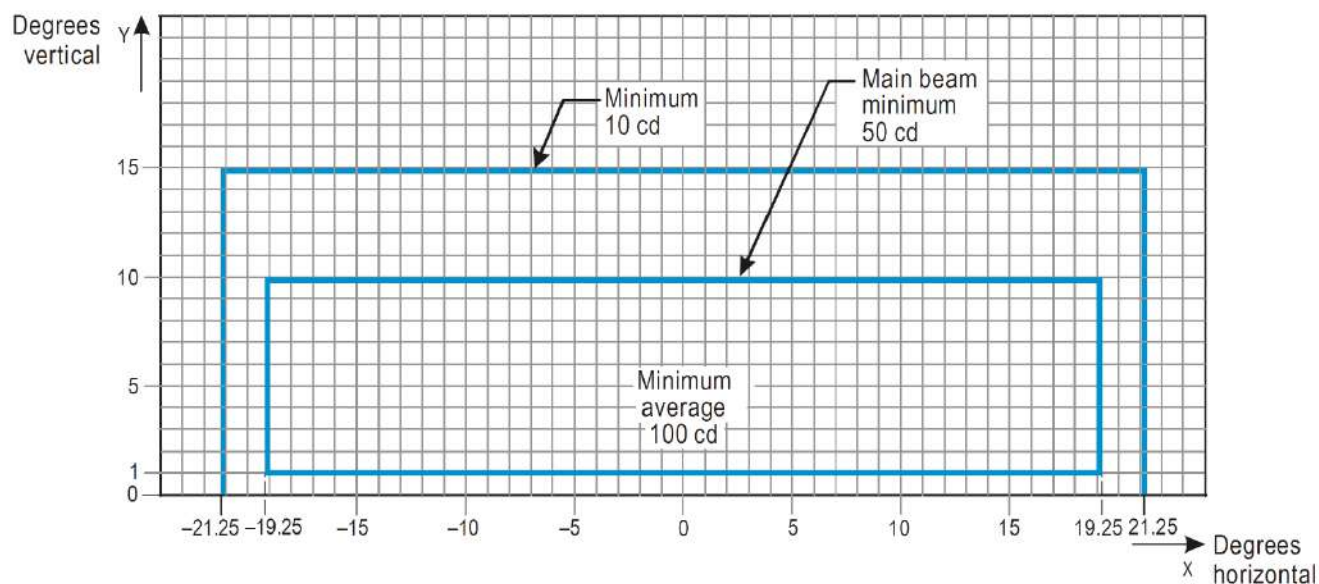

## Notes:

1. Lights on curves to be toed-in 15.75 degrees with respect to the tangent of the curve. This does not apply to runway entrance lights (RELs)
2. Increased intensities for RELs shall be twice the specified intensities, i.e., minimum 20 cd, main beam minimum 100 cd and minimum average 200 cd.
3. See collective notes for Figures A2-12 to A2-21.


**Figure A2-14. Isocandela diagram for taxiway centre line (7.5 m spacing), RELs, no-entry bar and stop bar lights in curved sections intended for use in runway visual range conditions of less than a value of 350 m**

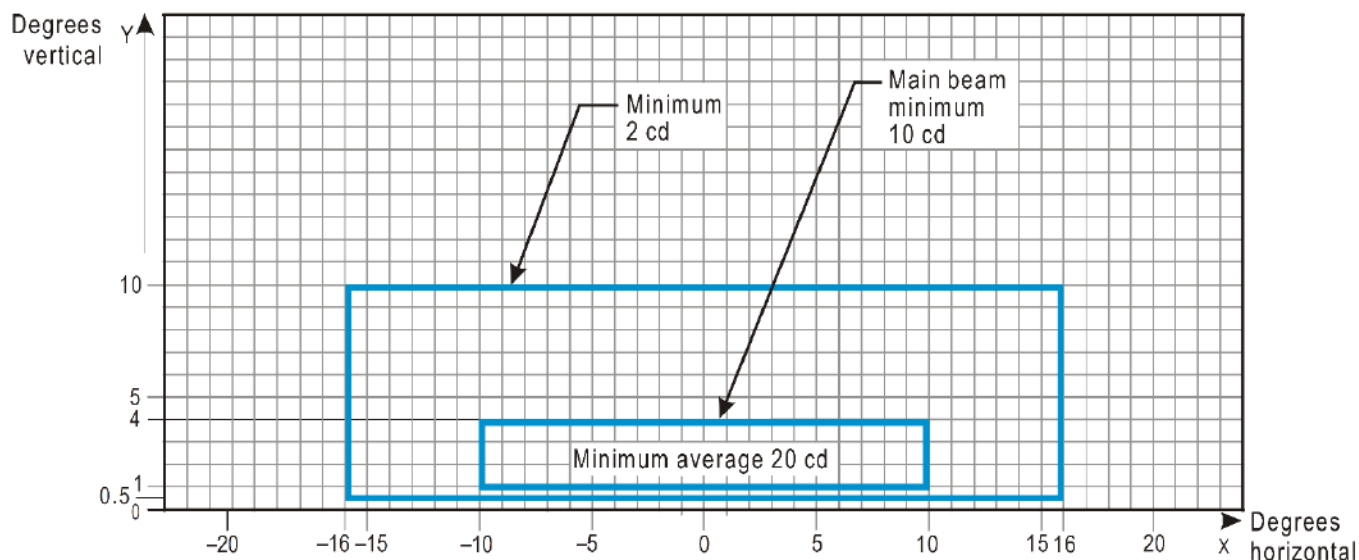

## Notes:

1. At locations where high background luminance is usual and where deterioration of light output resulting from dust, snow and local contamination is a significant factor, the cd-values should be multiplied by 2.5.
2. Where omnidirectional lights are used they shall comply with the vertical beam requirements in this figure.
3. See collective notes for Figures A2-12 to A2-21.

**Figure A2-15. Isocandela diagram for taxiway centre line (30 m, 60 m spacing), no-entry bar and stop bar lights in straight sections intended for use in runway visual range conditions of 350 m or greater**

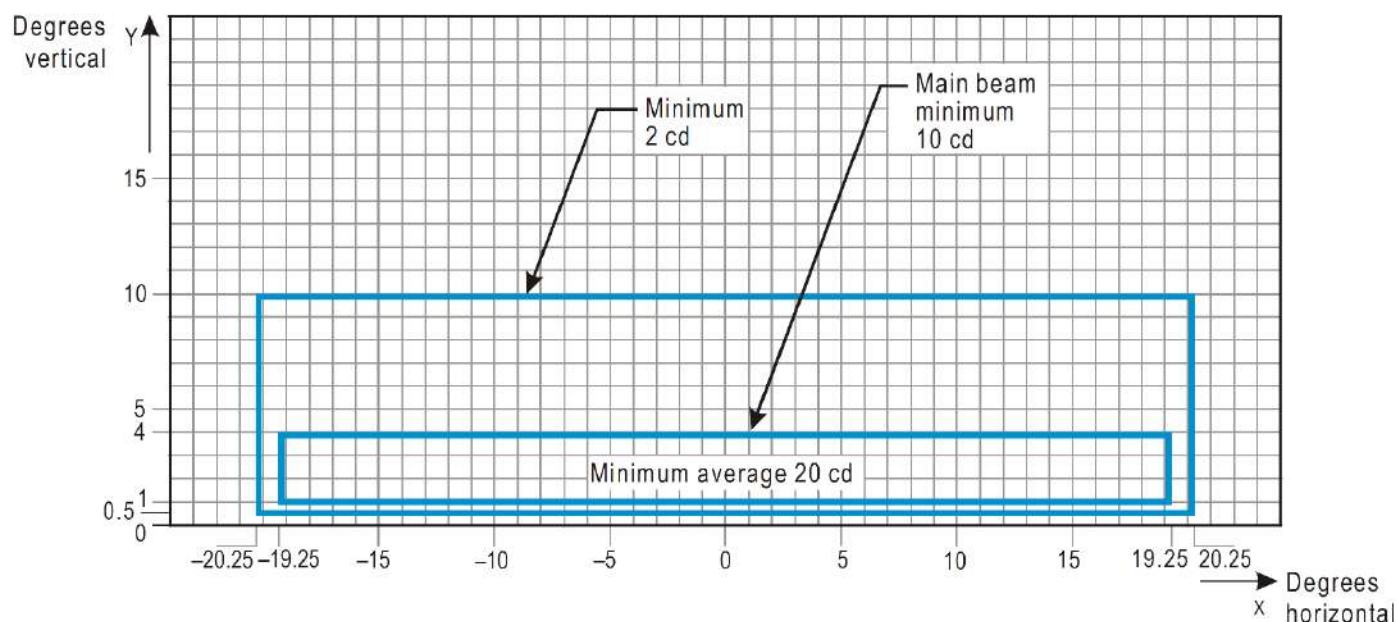


**Notes:**

1. Lights on curves to be toed-in 15.75 degrees with respect to the tangent of the curve.
2. At locations where high background luminance is usual and where deterioration of light output resulting from dust, snow and local contamination is a significant factor, the cd-values should be multiplied by 2.5.
3. These beam coverages allow for displacement of the cockpit from the centre line up to distances of the order of 12 m as could occur at the end of curves.
4. See collective notes for Figures A2-12 to A2-21.

**Figure A2-16. Isocandela diagram for taxiway centre line (7.5 m, 15 m, 30 m spacing), no-entry bar and stop bar lights in curved sections intended for use in runway visual range conditions of 350 m or greater**



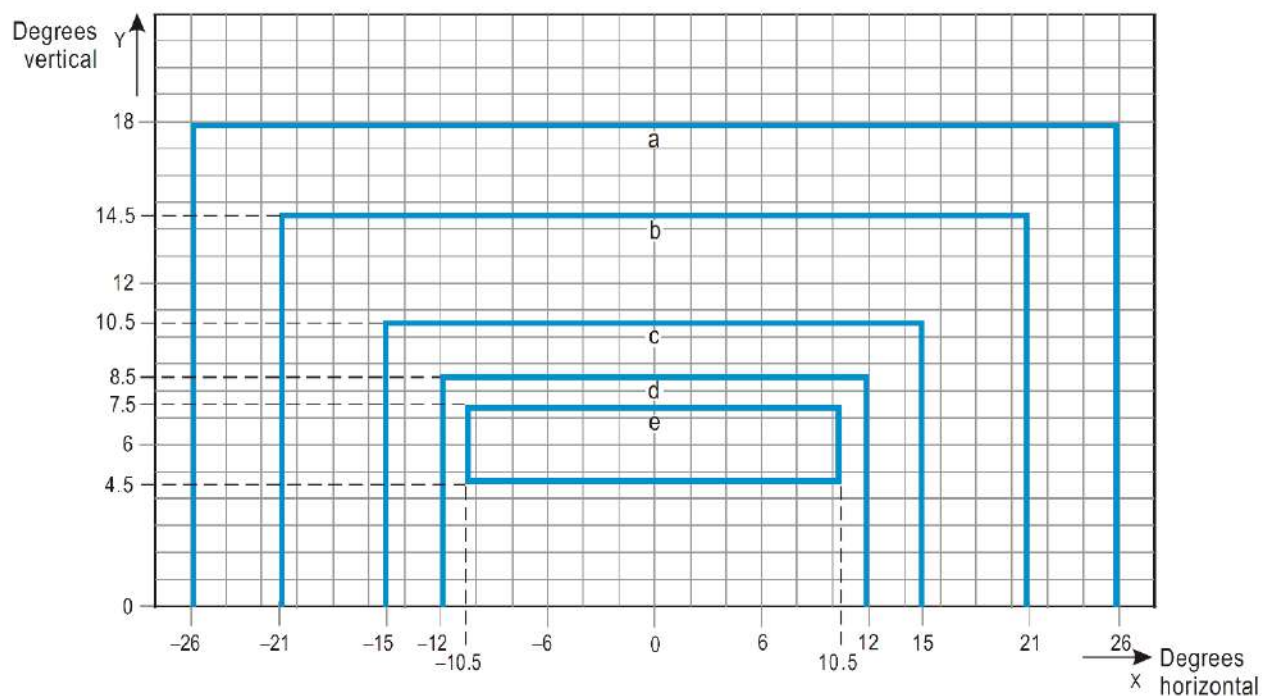


Curve	a	b	c	d	e
Intensity (cd)	8	20	100	450	1 800

## Notes:

1. These beam coverages allow for displacement of the cockpit from the centre line up to distances of the order of 12 m and are intended for use before and after curves.
2. See collective notes for Figures A2-12 to A2-21.

**Figure A2-17. Isocandela diagram for high-intensity taxiway centre line (15 m spacing), no-entry bar and stop bar lights in straight sections intended for use in an advanced surface movement guidance and control system where higher light intensities are required and where large offsets can occur**

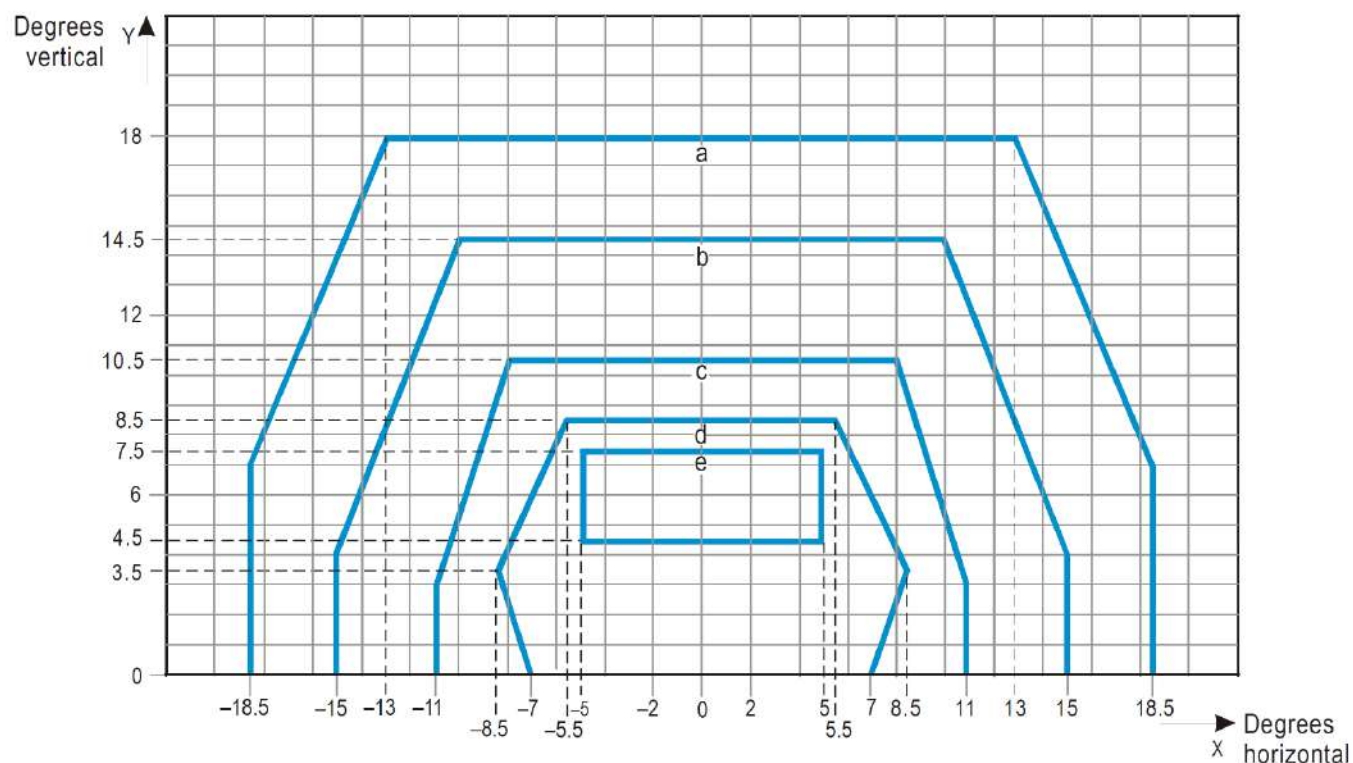


Curve	a	b	c	d	e
Intensity (cd)	8	20	100	450	1 800

Notes:

1. These beam coverages are generally satisfactory and cater for a normal displacement of the cockpit corresponding to the outer main gear wheel on the taxiway edge.
2. See collective notes for Figures A2-12 to A2-21.

**Figure A2-18. Isocandela diagram for high-intensity taxiway centre line (15 m spacing), no-entry bar and stop bar lights in straight sections intended for use in an advanced surface movement guidance and control system where higher light intensities are required**



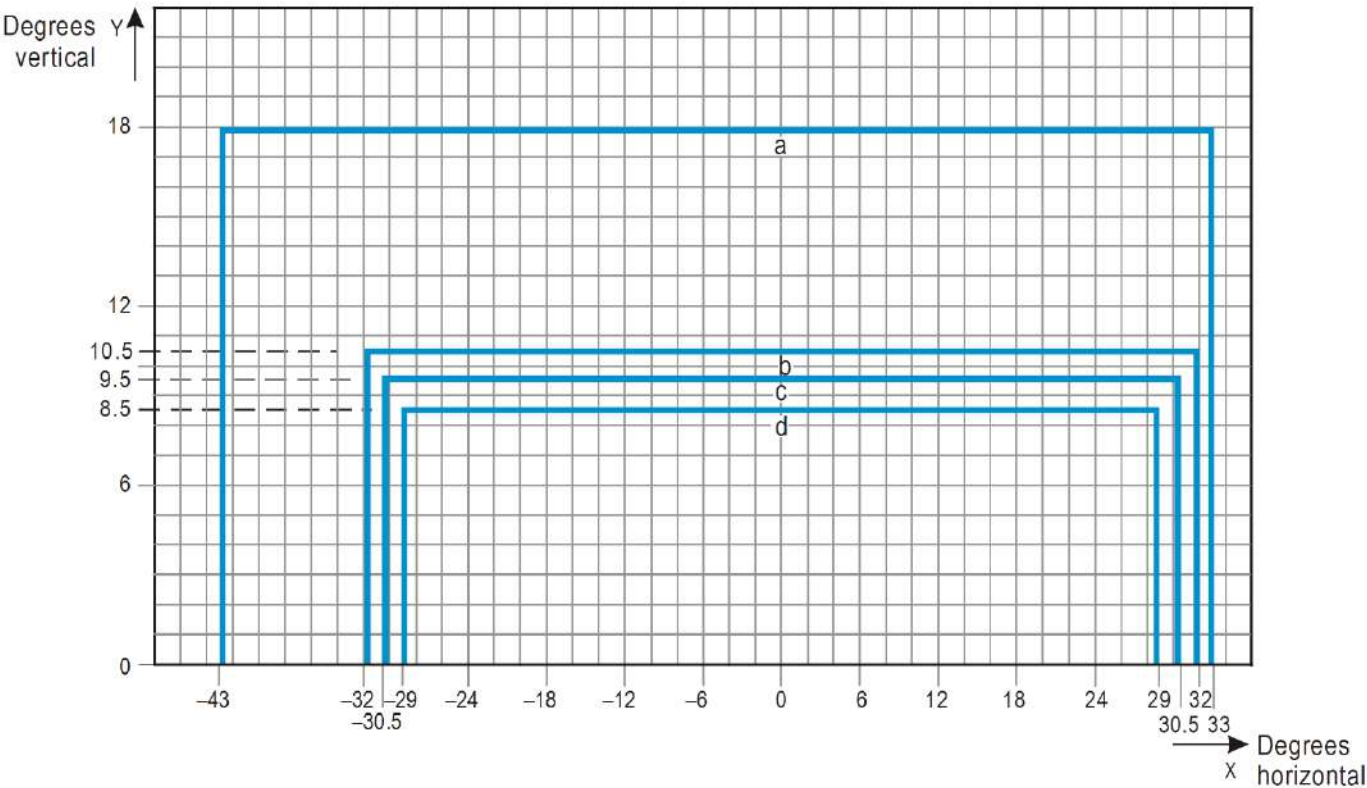


Curve	a	b	c	d
Intensity (cd)	8	100	200	400

Notes:

1. Lights on curves to be toed-in 17 degrees with respect to the tangent of the curve.
2. See collective notes for Figures A2-12 to A2-21.


**Figure A2-19. Isocandela diagram for high-intensity taxiway centre line (7.5 m spacing), no-entry bar and stop bar lights in curved sections intended for use in an advanced surface movement guidance and control system where higher light intensities are required**

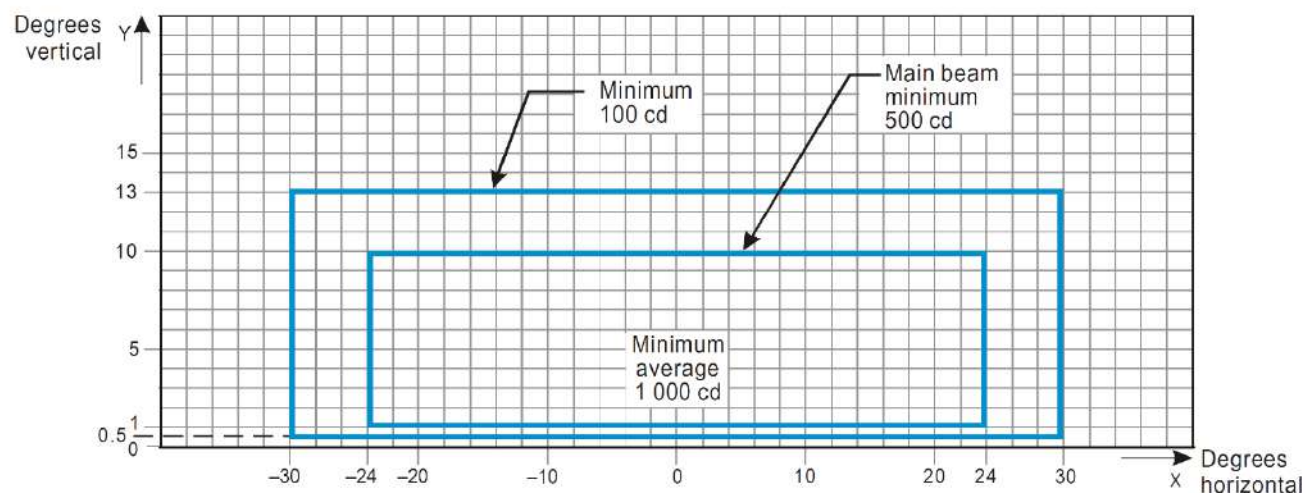

## Notes:

1. Although the lights flash in normal operation, the light intensity is specified as if the lights were fixed for incandescent lamps.
2. See collective notes for Figures A2-12 to A2-21.


**Figure A2-20. Isocandela diagram for high-intensity runway guard lights, Configuration B**

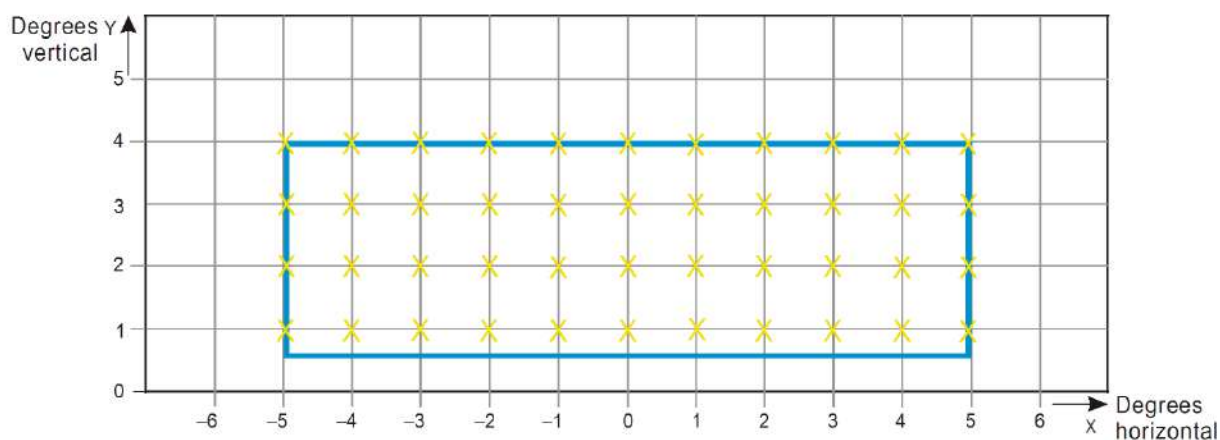


**Figure A2-21. Grid points to be used for calculation of average intensity of taxiway centre line and stop bar lights**

Collective notes to Figures A2-12 to A2-21

1. The intensities specified in Figures A2-12 to A2-20 are in green and yellow light for taxiway centre line lights, yellow light for runway guard lights and red light for stop bar lights.
2. Figures A2-12 to A2-20 show the minimum allowable light intensities. The average intensity of the main beam is calculated by establishing grid points as shown in Figure A2-21 and using the intensity values measured at all grid points located within and on the perimeter of the rectangle representing the main beam. The average value is the arithmetic average of the light intensities measured at all considered grid points.
3. No deviations are acceptable in the main beam or in the innermost beam, as applicable, when the lighting fixture is properly aimed.
4. Horizontal angles are measured with respect to the vertical plane through the taxiway centre line except on curves where they are measured with respect to the tangent to the curve.
5. Vertical angles are measured from the longitudinal slope of the taxiway surface.
6. The importance of adequate maintenance cannot be overemphasized. The intensity, either average where applicable or as specified on the corresponding isocandela curves, shall never fall to a value less than 50 per cent of the value shown in the figures, and it shall be the aim of airport authorities to maintain a level of light output close to the specified minimum average intensity.
7. The light unit shall be installed so that the main beam or the innermost beam, as applicable, is aligned within one-half degree of the specified requirement.

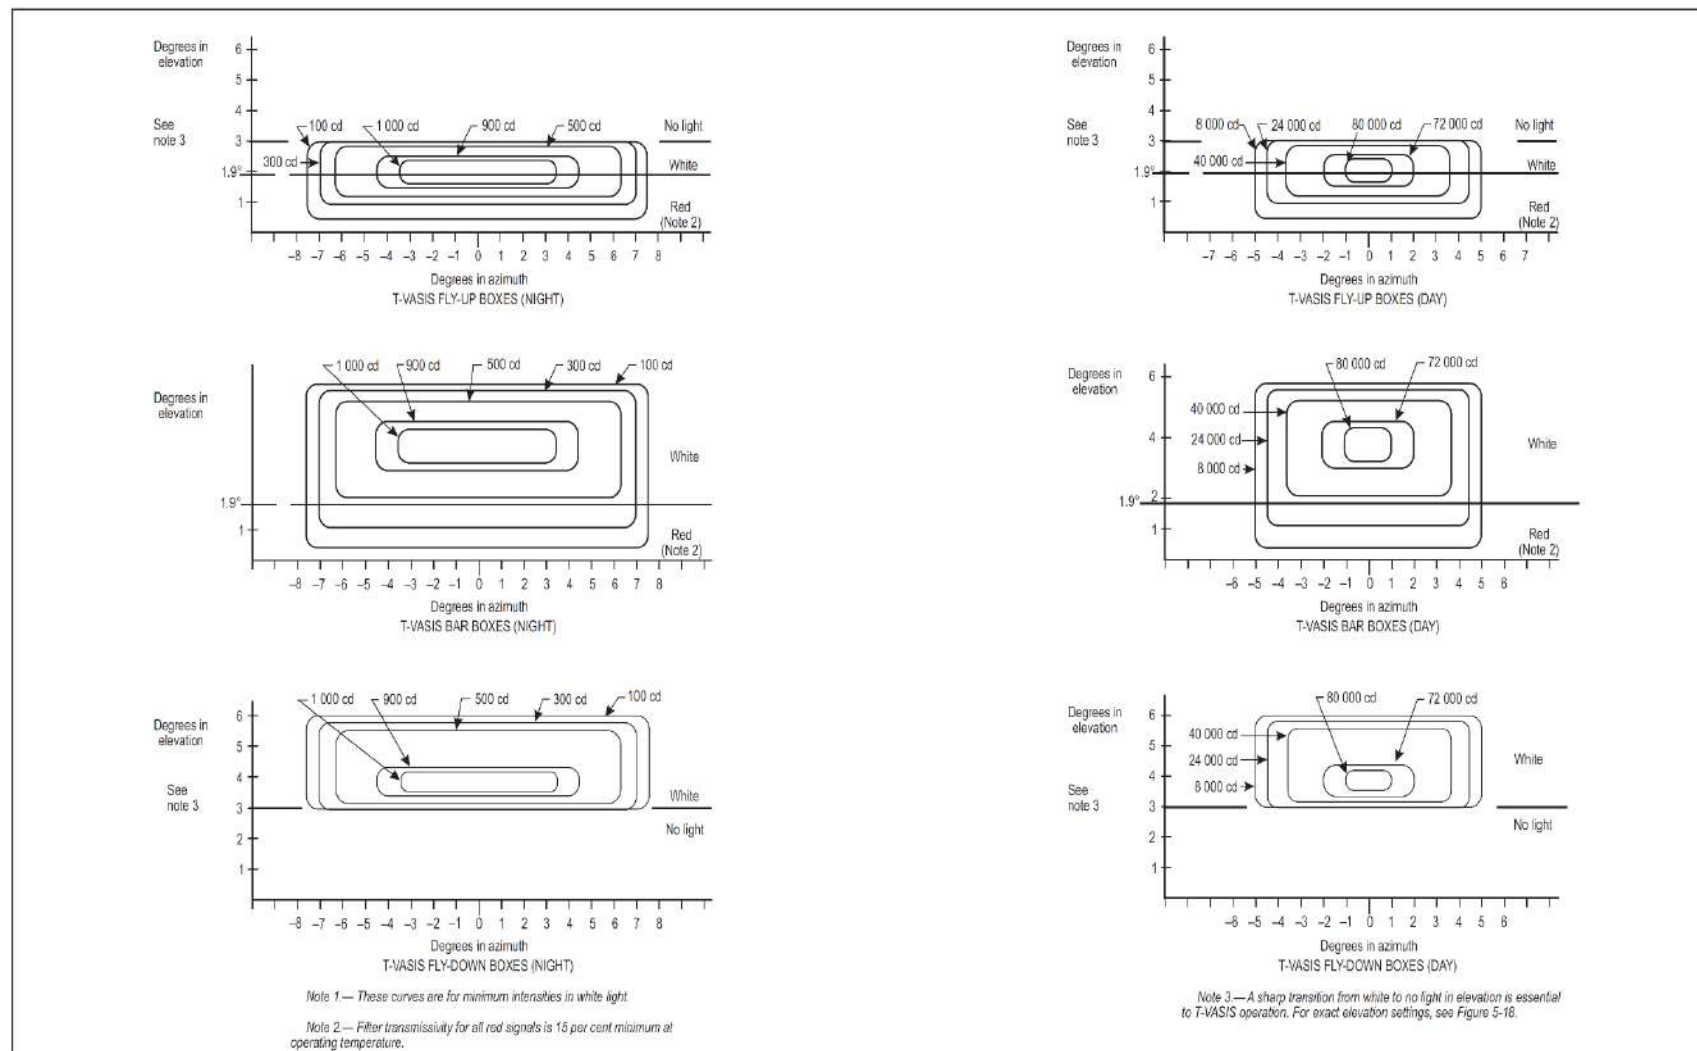


**Figure A2-22. Light intensity distribution of T-VASIS and AT-VASIS**

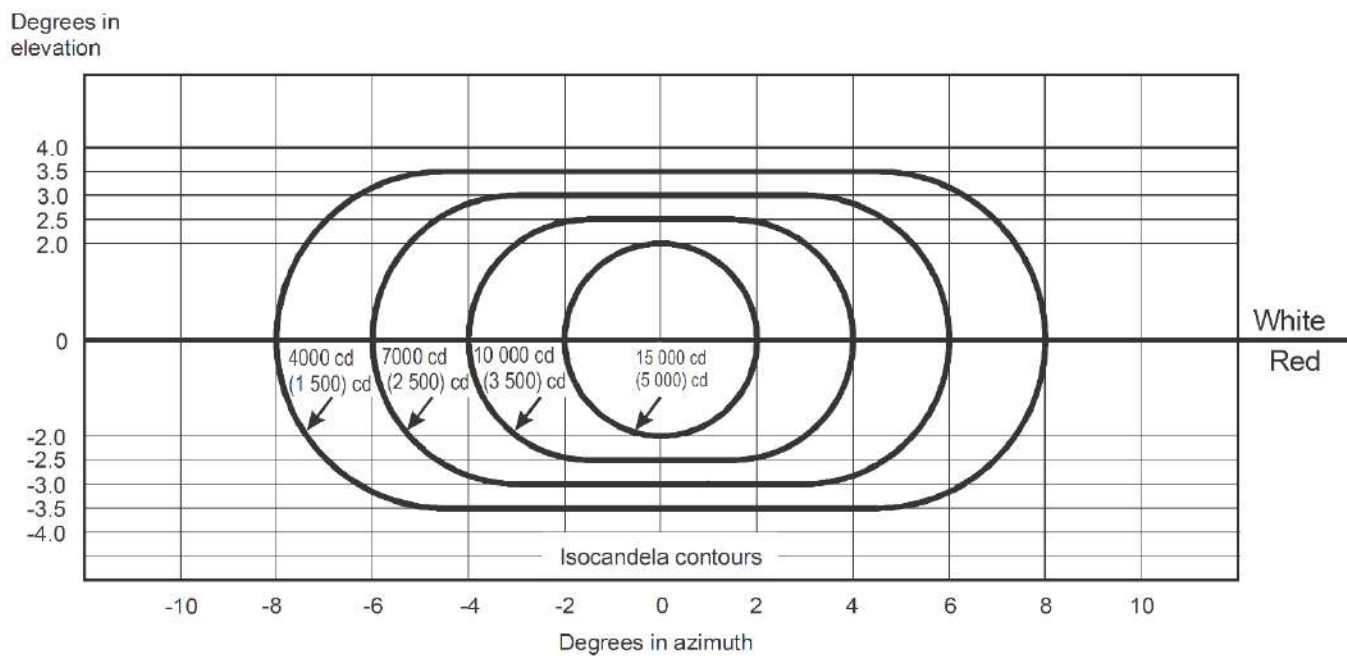

## Notes:

1. These curves are for minimum intensities in red light.
2. The intensity value in the white sector of the beam is no less than 2 and may be as high as 6.5 times the corresponding intensity in the red sector.
3. The intensity values shown in brackets are for APAPI.


**Figure A2-23. Light intensity distribution of PAPI and APAPI**

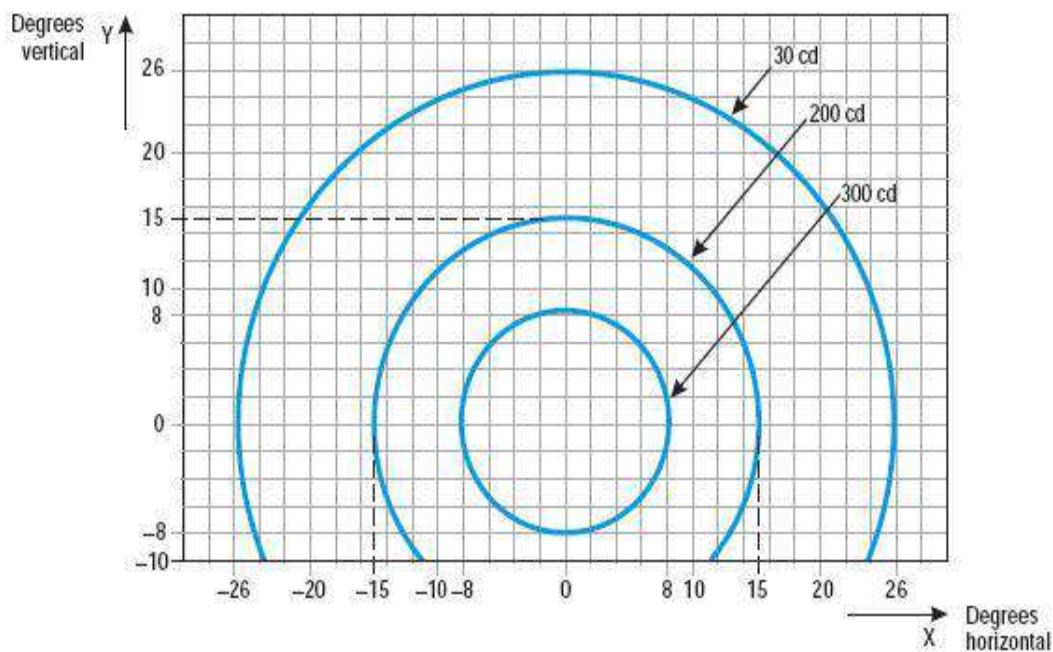

Notes:

1. Although the lights flash in normal operation, the light intensity is specified as if the lights were fixed for incandescent lamps.
2. The intensities specified are in yellow light.

**Figure A2-24. Isocandela diagram for each light in low-intensity runway guard lights, Configuration A**

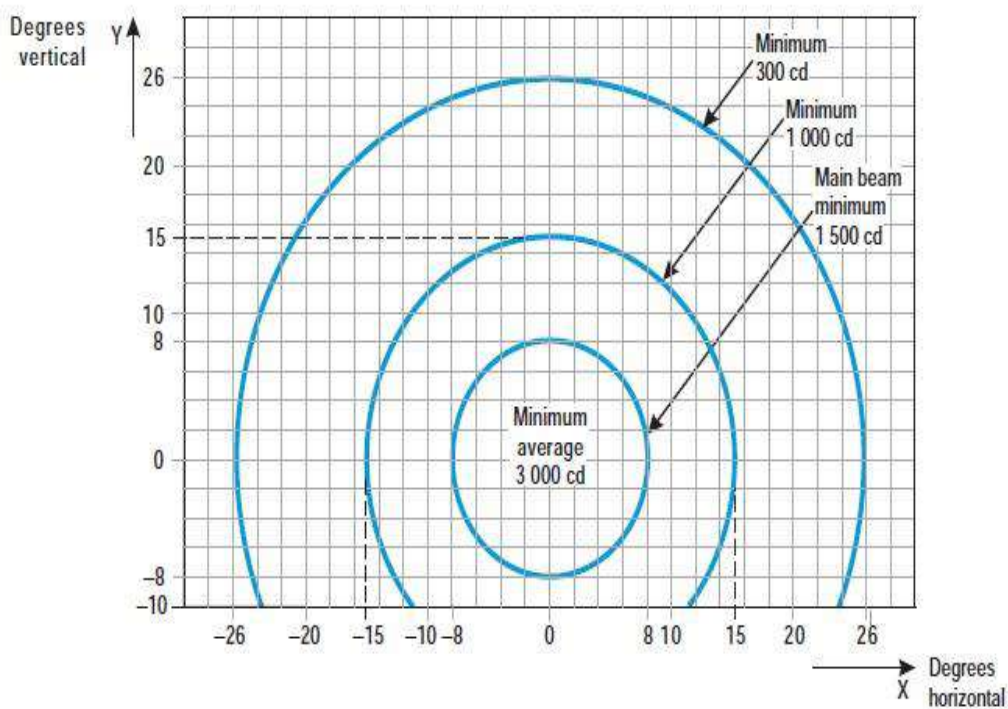

## Notes:

1. Although the lights flash in normal operation, the light intensity is specified as if the lights were fixed for incandescent lamps.
2. The intensities specified are in yellow light.

Figure A2-25. Isocandela diagram for each light in high-intensity runway guard lights, Configuration A




### APPENDIX 3. MANDATORY INSTRUCTION MARKINGS AND INFORMATION MARKINGS

*Note 1. — See Chapter 5, Sections 5.2.16 and 5.2.17 for specifications on the application, location and characteristics of mandatory instruction markings and information markings.*


*Note 2. — This appendix details the form and proportions of the letters, numbers and symbols of mandatory instruction markings and information markings on a grid.*

*Note 3. — The mandatory instruction markings and information markings on pavements are formed as if shadowed (i.e., stretched) from the characters of an equivalent elevated sign by a factor of 2.5 as shown in the figure below. The shadowing, however, only affects the vertical dimension. Therefore, the spacing of characters for pavement marking is obtained by first determining the equivalent elevated sign character height and then proportioning from the spacing values given in Table A41.*


*For example, in the case of the runway designator "10" which is to have a height of 4 000 mm (Hps), the equivalent elevated sign character height is  $4\,000/2.5=1\,600$  mm (Hes). Table A4-1(b) indicates numeral to numeral code 1 and from Table A4-1(c) this code has a dimension of 96 mm, for a character height of 400 mm. The pavement marking spacing for "10" is then  $(1\,600/400)*96=384$  mm.*

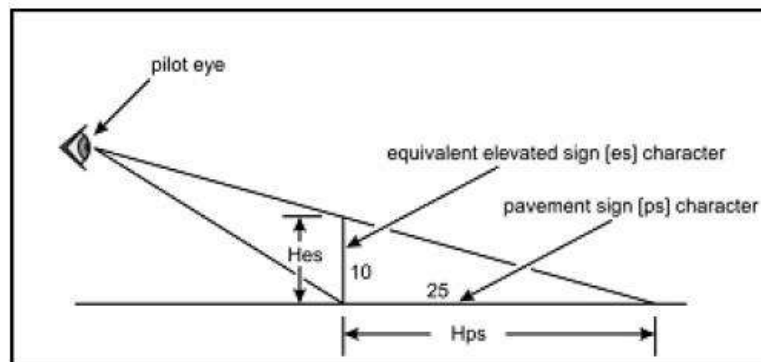




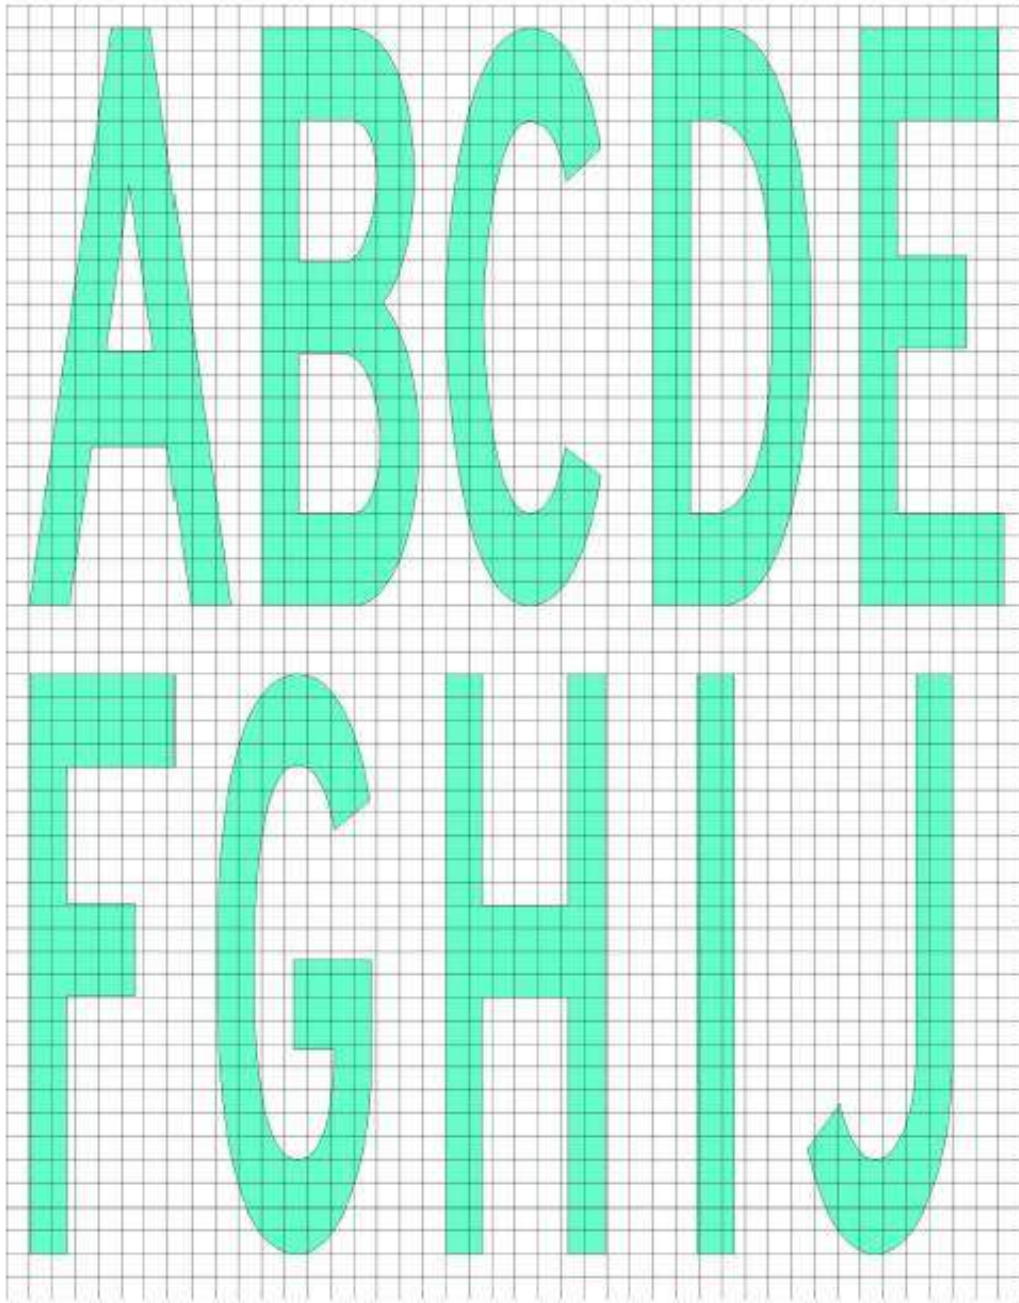



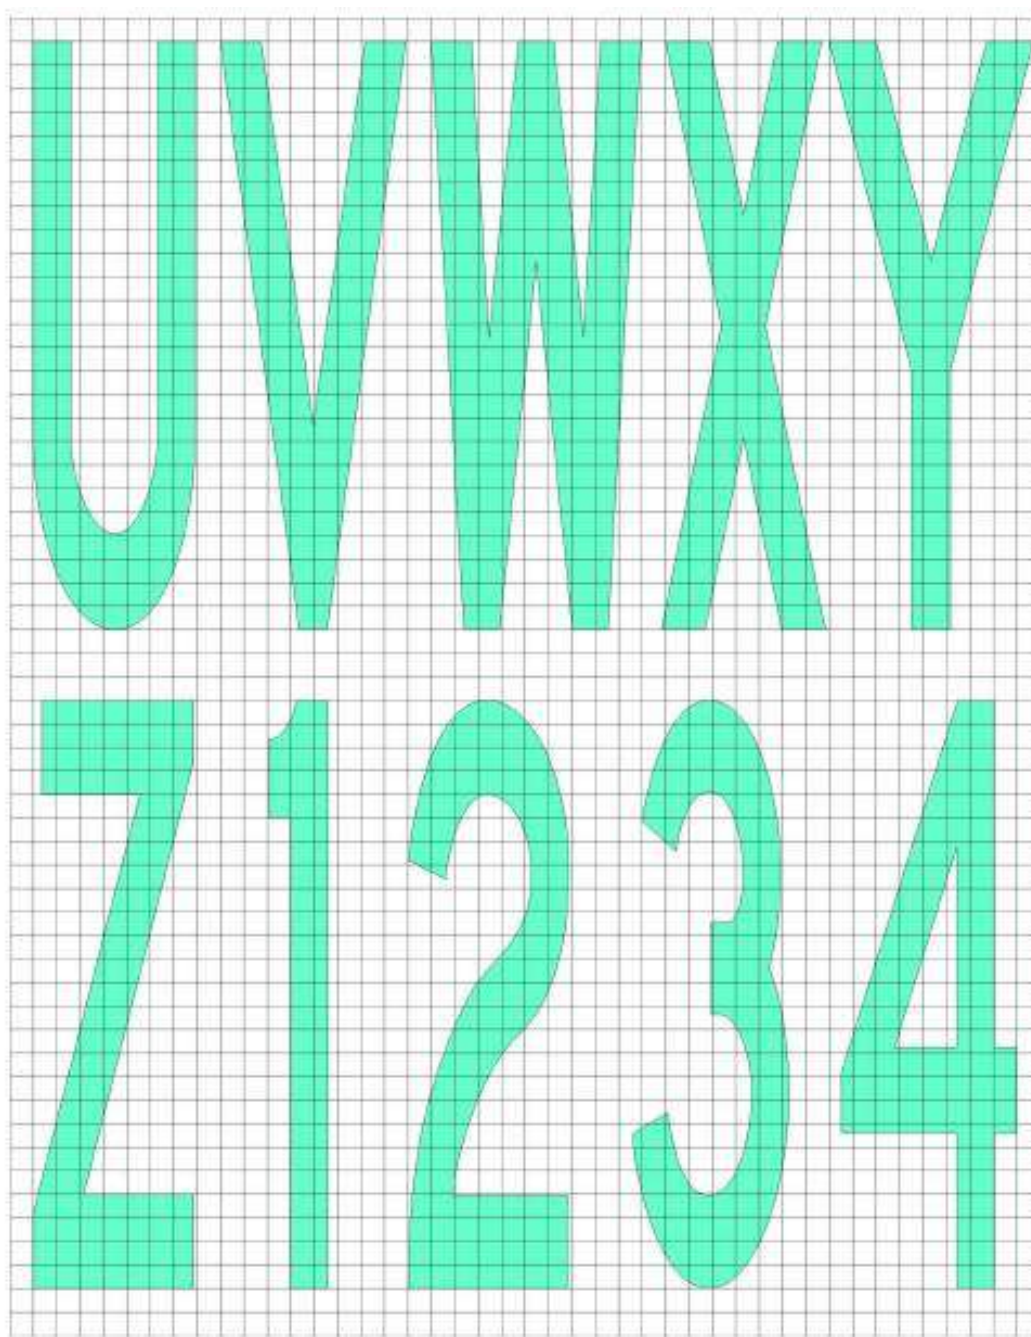



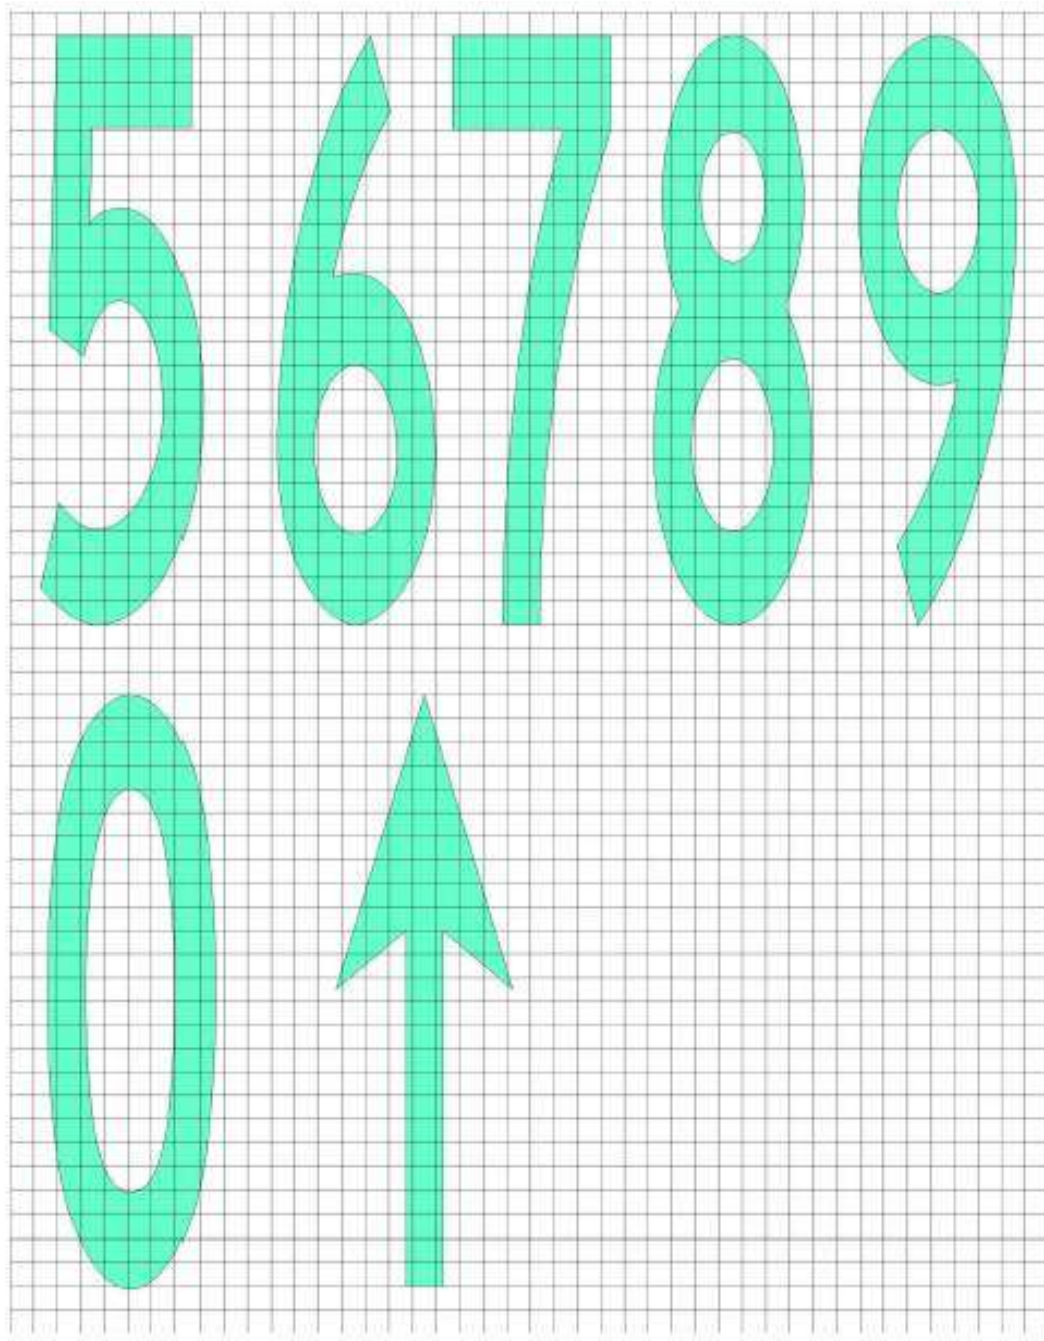

## APPENDIX 4. REQUIREMENTS CONCERNING DESIGN OF TAXIING GUIDANCE SIGNS

**Note:** See Chapter 5, Section 5.4 for specifications on the application, location and characteristics of signs.

1. Inscription heights shall conform to the following tabulation.

Runway code number	Minimum character height		
	Mandatory instruction sign	Information sign	
		Runway exit and runway vacated signs	Other signs
1 or 2	300 mm	300 mm	200 mm
3 or 4	400 mm	400 mm	300 mm

**Note:** Where a taxiway location sign is installed in conjunction with a runway designation sign (see 5.4.3.22), the character size shall be that specified for mandatory instruction signs.

2. Arrow dimensions shall be as follows:

Legend height	Stroke
200 mm	32 mm
300 mm	48 mm
	64 mm

3. Stroke width for single letter shall be as follows:

Legend height	Stroke
200 mm	32 mm
300 mm	48 mm
400 mm	64 mm

4. Sign luminance shall be as follows:

- a) Where operations are conducted in runway visual range conditions less than a value of 800 m, average sign luminance shall be at least:

---

Red	30 cd/m <sup>2</sup>
Yellow	150 cd/m <sup>2</sup>
White	300 cd/m <sup>2</sup>

- b) Where operations are conducted in accordance with 5.4.1.7 b) and c) and 5.4.1.8, average sign luminance shall be at least:

Red	10 cd/m <sup>2</sup>
Yellow	50 cd/m <sup>2</sup>
White	100 cd/m <sup>2</sup>

**Note:** In runway visual range conditions less than a value of 400 m, there will be some degradation in the performance of signs.

5. The luminance ratio between red and white elements of a mandatory sign shall be between 1:5 and 1:10.

6. The average luminance of the sign is calculated by establishing grid points as shown in Figure A4-1 and using the luminance values measured at all grid points located within the rectangle representing the sign.

7. The average value is the arithmetic average of the luminance values measured at all considered grid points.

**Note:** Guidance on measuring the average luminance of a sign is contained in the *Aerodrome Design Manual, Part 4*.

8. The ratio between luminance values of adjacent grid points shall not exceed 1.5:1. For areas on the sign face where the grid spacing is 7.5 cm, the ratio between luminance values of adjacent grid points shall not exceed 1.25:1. The ratio between the maximum and minimum luminance value over the whole sign face shall not exceed 5:1.

9. The forms of characters, i.e. letters, numbers, arrows and symbols, shall conform to those shown in Figure A4-2. The width of characters and the space between individual characters shall be determined as indicated in Table A4-1.

10. The face height of signs shall be as follows:

Legend height	Face height (min)
200 mm	400 mm
300 mm	600 mm
400 mm	800 mm

11. The face width of signs shall be determined using Figure A4-3 except that, where a mandatory instruction sign is provided on one side of a taxiway only, the face width shall not be less than:

- a) 1.94 m where the code number is 3 or 4; and
-


- b) 1.46 m where the code number is 1 or 2.

**Note:** Additional guidance on determining the face width of a sign is contained in the *Aerodrome Design Manual, Part 4*.

## 12. Borders

- a) The black vertical delineator between adjacent direction signs shall have a width of approximately 0.7 of the stroke width.
- b) The yellow border on a stand-alone location sign shall be approximately 0.5 stroke width.

13. The colours of signs shall be in accordance with the appropriate specifications in Appendix 1.

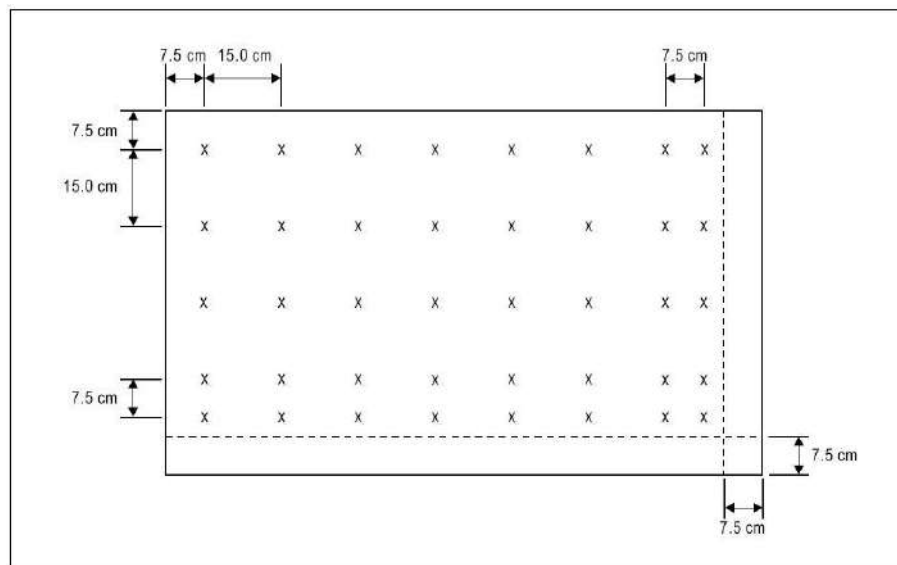

**Figure A4-1. Grid points for calculating average luminance of a sign**

**Note 1:** The average luminance of a sign is calculated by establishing grid points on a sign face showing typical inscriptions and a background of the appropriate colour (red for mandatory instruction signs and yellow for direction and destination signs) as follows:

- a) Starting at the top left corner of the sign face, establish a reference grid point at 7.5 cm from the left edge and the top of the sign face.

- 
- b) Create a grid of 15 cm spacing horizontally and vertically from the reference grid point. Grid points within 7.5 cm of the edge of the sign face shall be excluded.*
  - c) Where the last point in a row/column of grid points is located between 22.5 cm and 15 cm from the edge of the sign face (but not inclusive), an additional point shall be added 7.5 cm from this point.*
  - d) Where a grid point falls on the boundary of a character and the background, the grid point shall be slightly shifted to be completely outside the character.*

**Note 2:** *Additional grid points may be required to ensure that each character includes at least five evenly spaced grid points.*

**Note 3:** *Where one unit includes two types of signs, a separate grid shall be established for each type.*



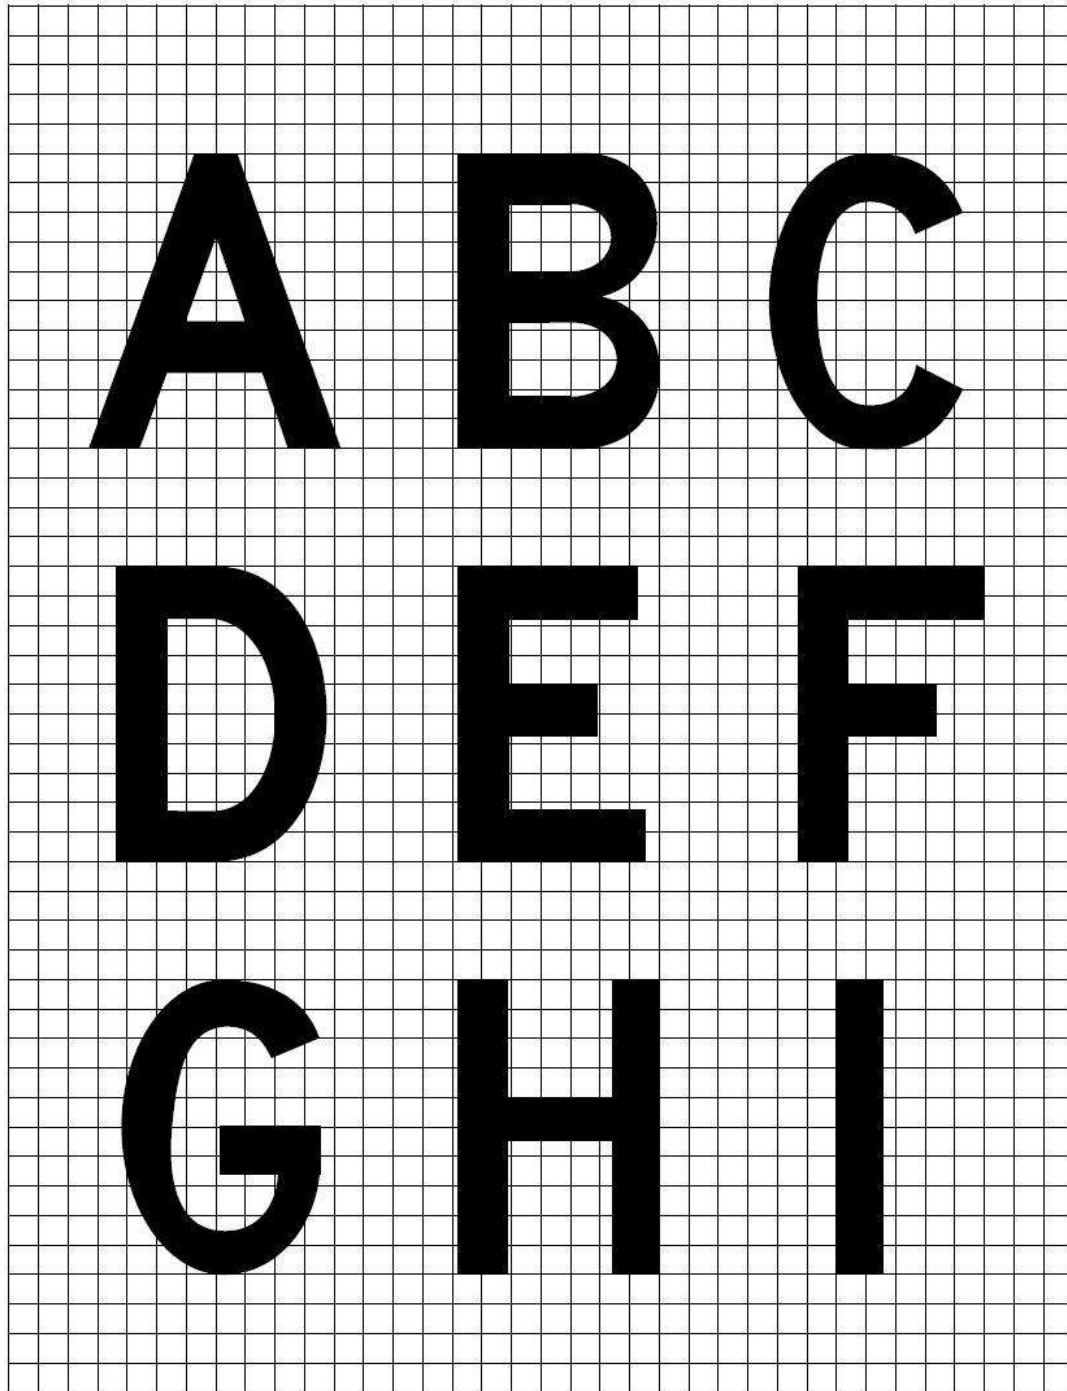
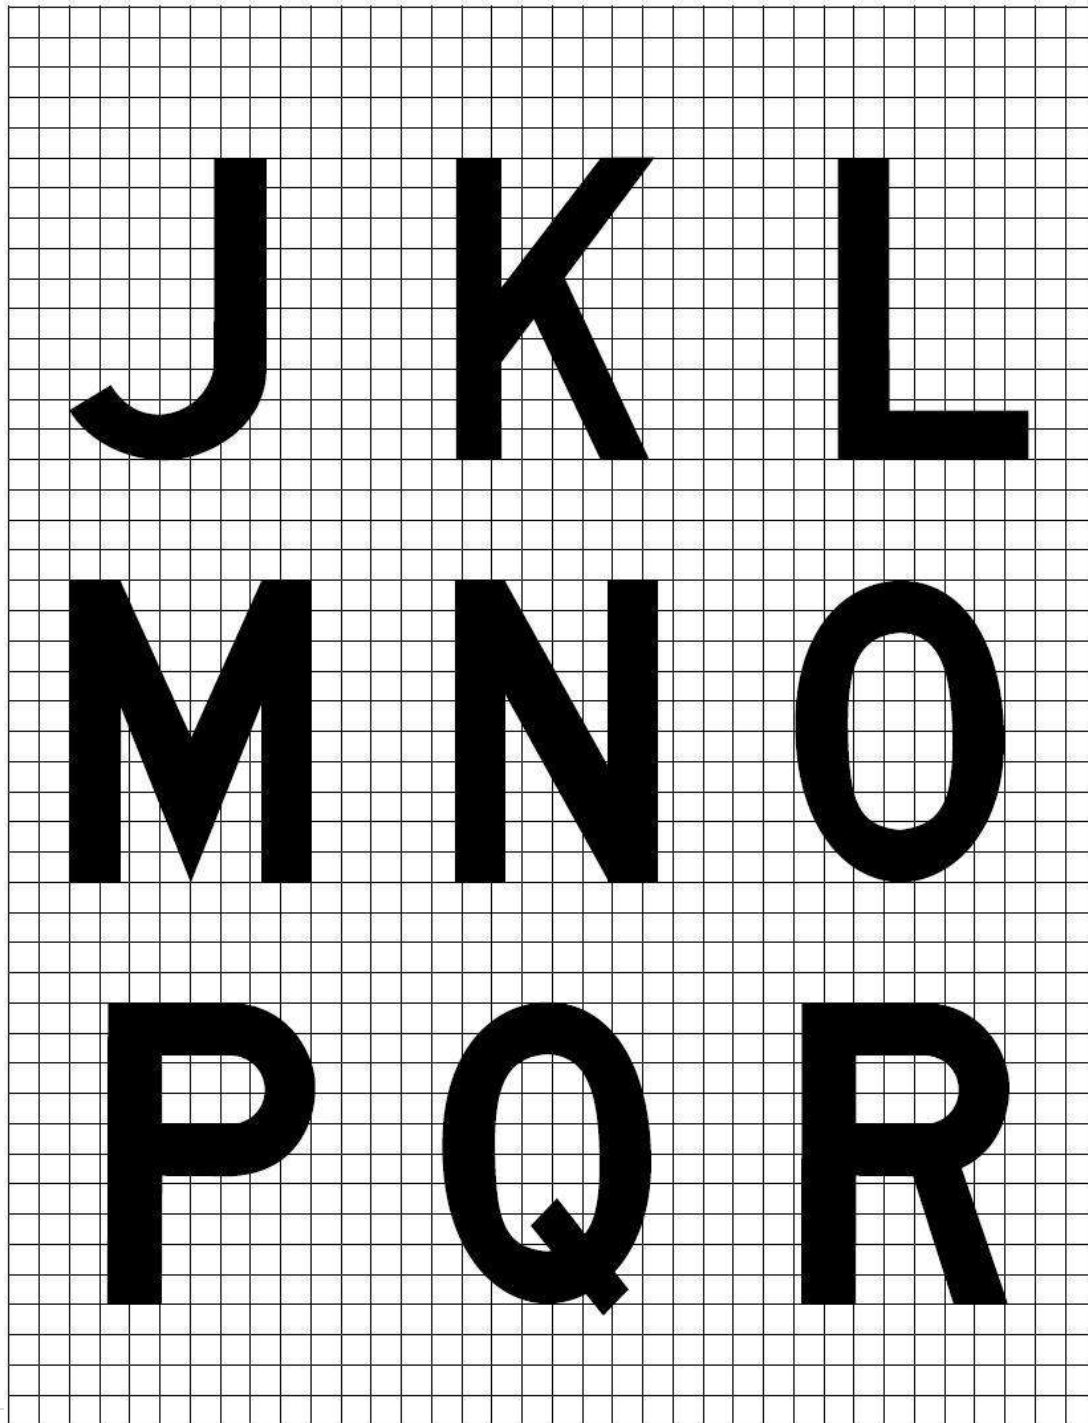


Figure A4-2. Forms of characters



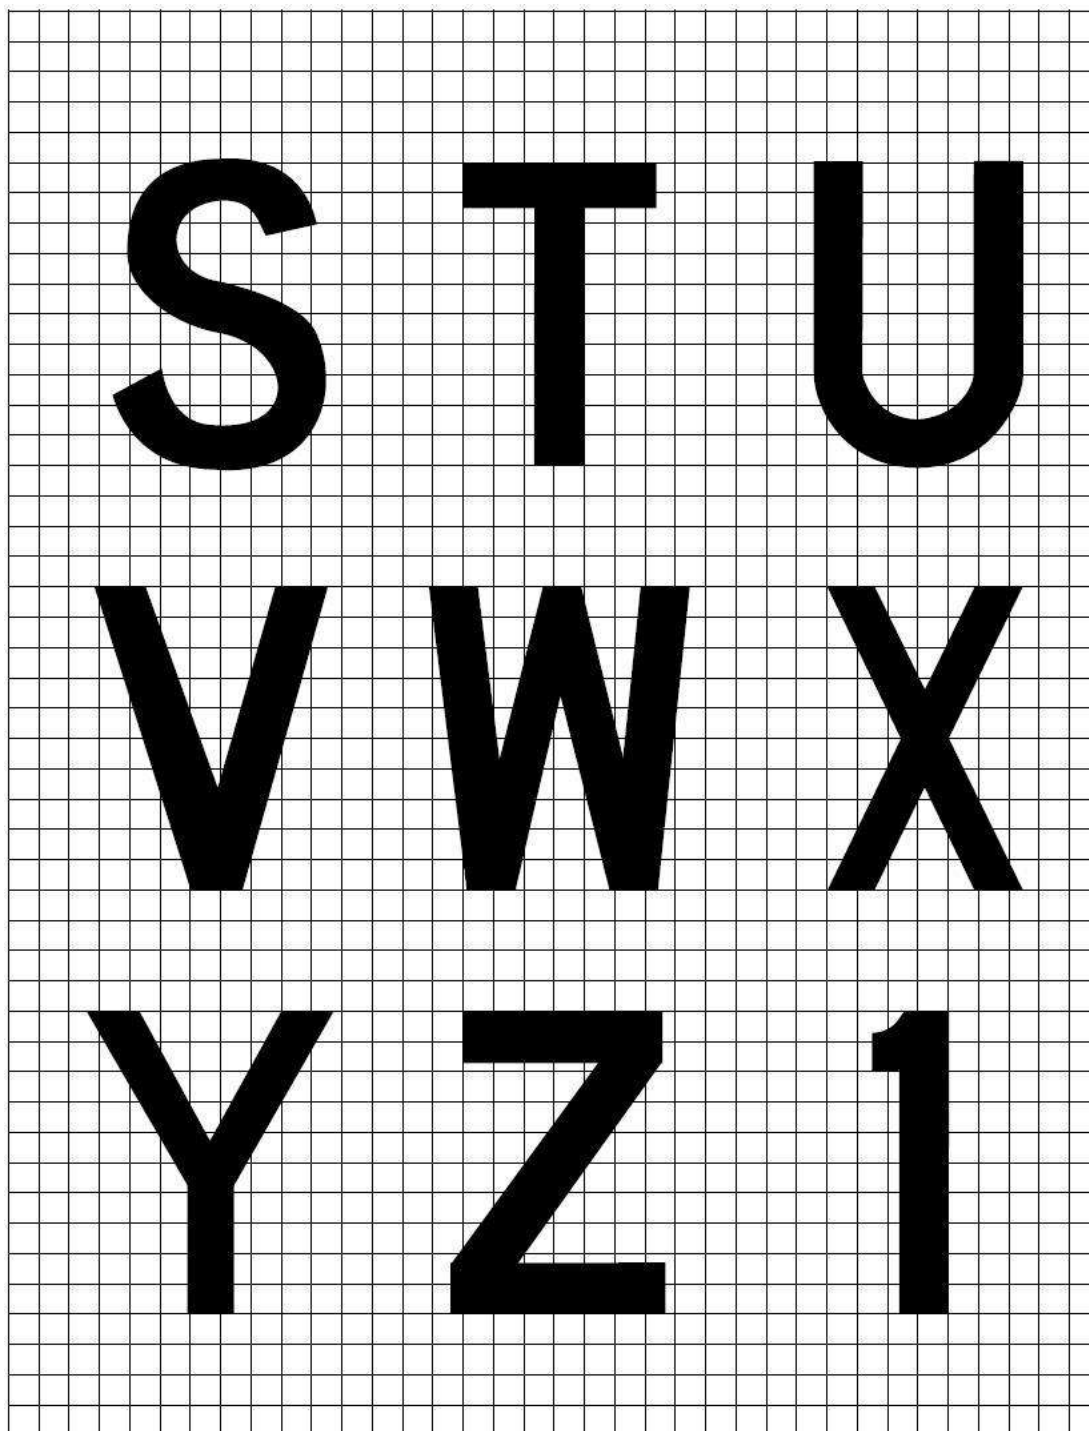


Figure A4-2. (cont.)


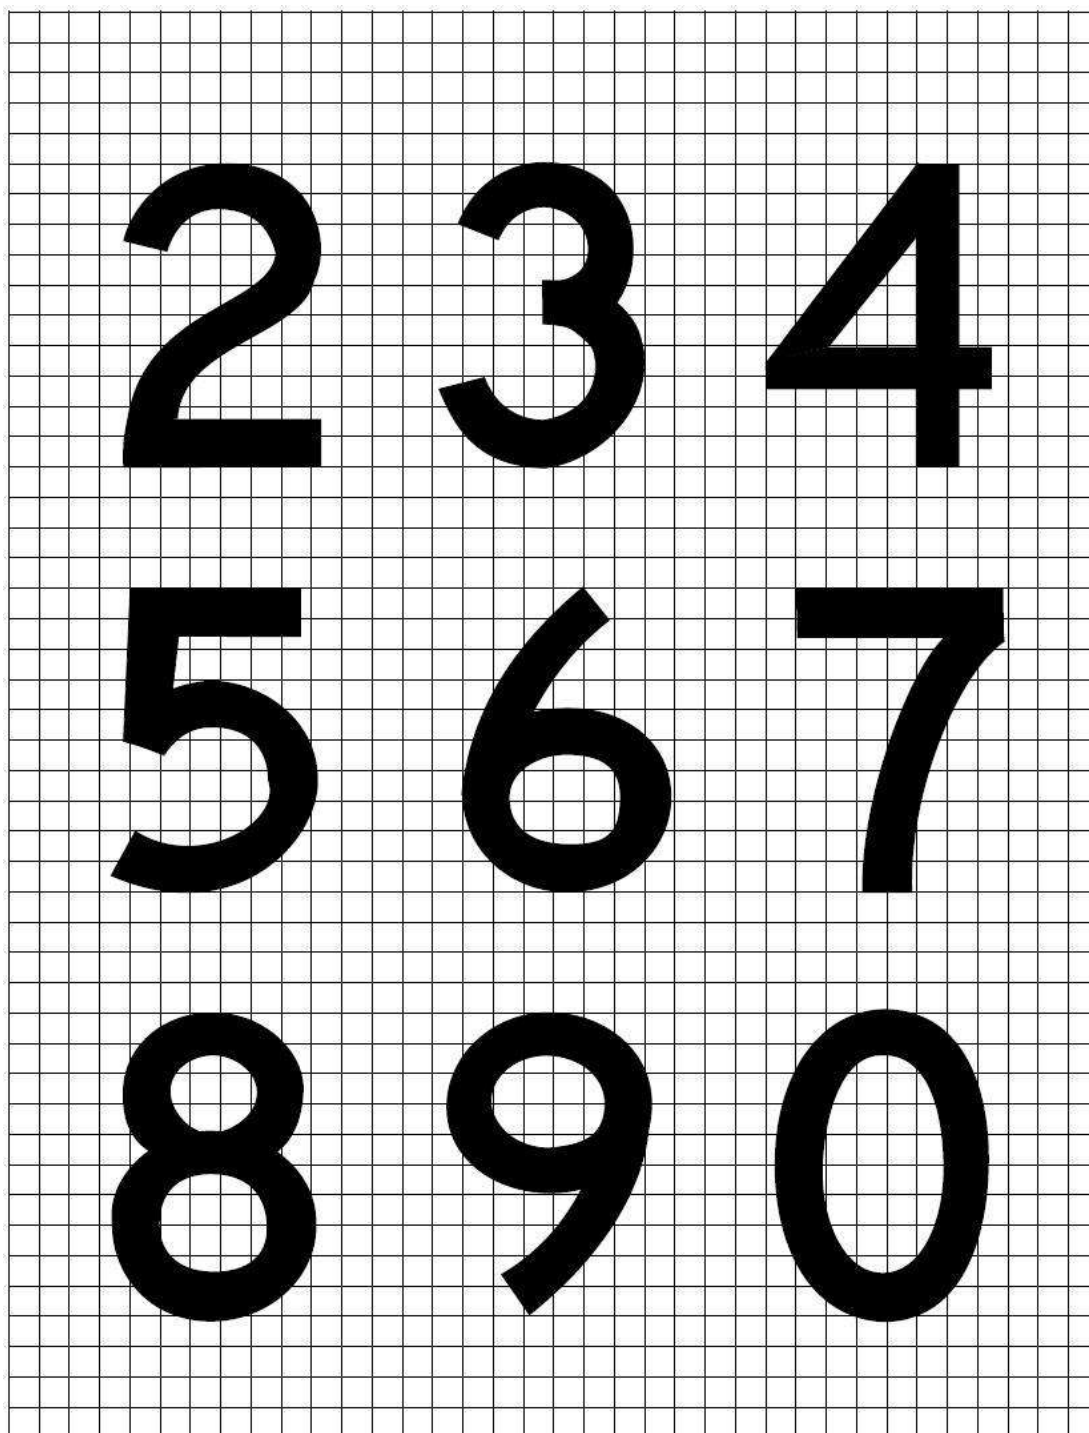


Figure A4-2. (cont.)

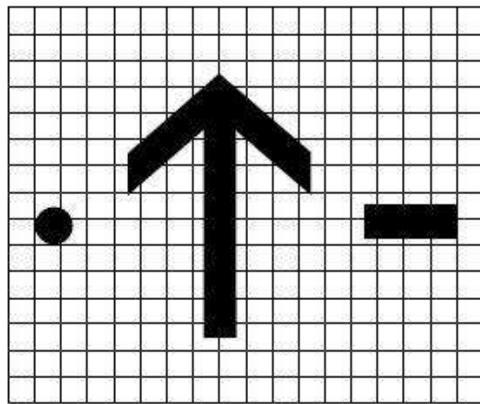

Arrow, dot and dash

*Note 1.— The arrow stroke width, diameter of the dot, and both width and length of the dash shall be proportioned to the character stroke widths.*

*Note 2.— The dimensions of the arrow shall remain constant for a particular sign size, regardless of orientation.*

Figure A4-2

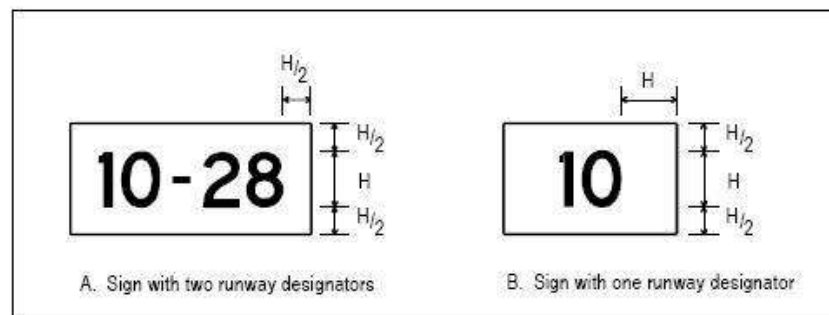


Figure A4-3. Sign dimensions

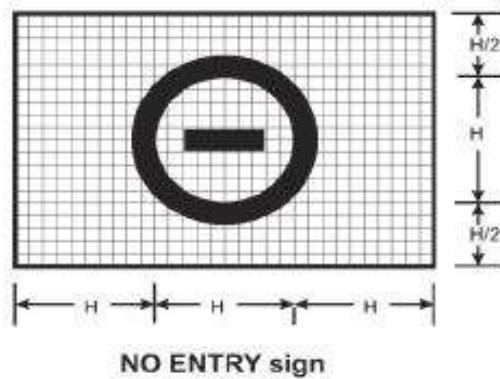
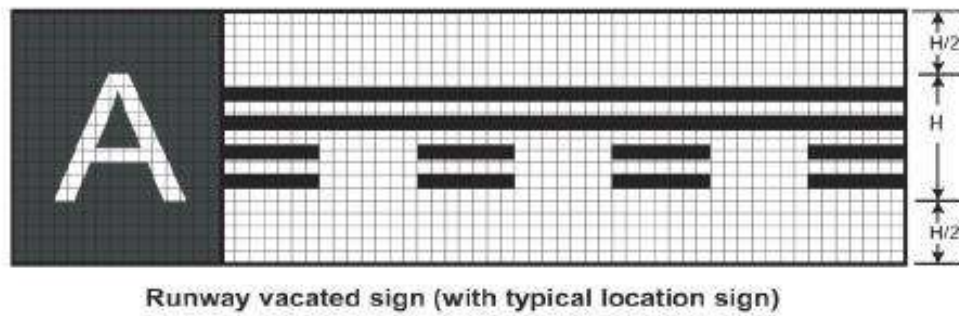


Figure A4-3. Runway vacated and NO ENTRY signs

**Table A4-1. Letter and numeral widths and space between letters or numerals**

a) Letter to letter code number			
Preceding Letter	Following Letter		
	B, D, E, F, H, I, K, L, M, N, P, R, U	C, G, O, Q, S, X, Z	A, J, T, V, W, Y
	Code number		
A	2	2	4
B	1	2	2
C	2	2	3
D	1	2	2
E	2	2	3
F	2	2	3
G	1	2	2
H	1	1	2
I	1	1	2
J	1	1	2
K	2	2	3
L	2	2	4
M	1	1	2
N	1	1	2
O	1	2	2
P	1	2	2
Q	1	2	2
R	1	2	2
S	1	2	2
T	2	2	4
U	1	1	2
V	2	2	4
W	2	2	4
X	2	2	3
Y	2	2	4
Z	2	2	3

d) Width of letter			
Letter	Letter height (mm)		
	200	300	400
	Width (mm)		
A	170	255	340
B	137	205	274
C	137	205	274
D	137	205	274
E	124	186	248
F	124	186	248
G	137	205	274
H	137	205	274
I	32	48	64
J	127	190	254
K	140	210	280
L	124	186	248
M	157	236	314
N	137	205	274
O	143	214	286
P	137	205	274
Q	143	214	286
R	137	205	274
S	137	205	274
T	124	186	248
U	137	205	274
V	152	229	304
W	178	267	356
X	137	205	274
Y	171	257	342
Z	137	205	274

b) Numeral to numeral code number			
Preceding Numeral	Following number		
	1, 5	2, 3, 6, 8, 9, 0	4, 7
	Code number		
1	1	1	2
2	1	2	2
3	1	2	2
4	2	2	4
5	1	2	2
6	1	2	2
7	2	2	4
8	1	2	2
9	1	2	2
0	1	2	2


e) Width of numeral			
Numeral	Numeral height (mm)		
	200	300	400
	Width (mm)		
1	50	74	98
2	137	205	274
3	137	205	274
4	149	224	298
5	137	205	274
6	137	205	274
7	137	205	274
8	137	205	274
9	137	205	274
0	143	214	286

c) Space between characters			
Code No.	Character height (mm)		
	200	300	400
	Space (mm)		
1	48	71	96
2	38	57	76
3	25	38	50
4	13	19	26

**INSTRUCTIONS**

1. To determine the proper SPACE between letters or numerals, obtain the code number from table a) or b) and enter table c) for that code number to the desired letter or numerals height.
2. The space between words or groups of characters forming an abbreviation or symbol should be equal to 0.5 to 0.75 of the height of the characters used except that where an arrow is located with a single character such as 'A →', the space may be reduced to not less than one quarter of the height of character in order to provide a good visual balance.
3. Where the numerals follows a letter or vice versa use Code 1.
4. Where a hyphen, dot, or diagonal stroke follows a character or vice versa use Code 1.
5. For the intersection take-off sign, the height of the lower case "m" is 0.75 of the height of the preceding "0" (zero) and spaced from the preceding "0" at code 1 for the character height of the numerals.


## APPENDIX 5. LOCATION OF LIGHTS ON OBSTACLES

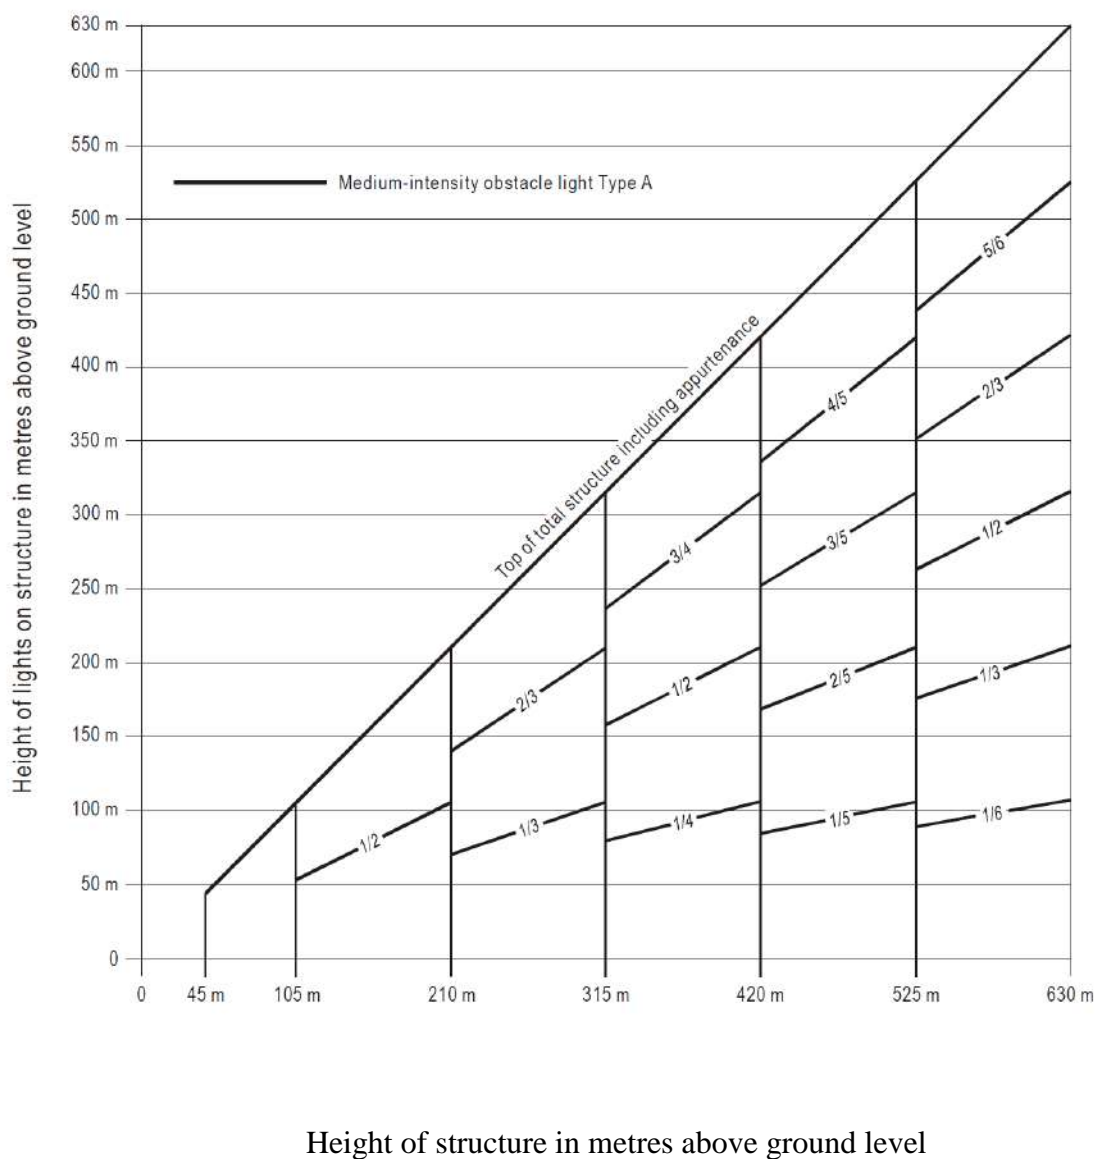

**Note:** High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level. If medium-intensity lighting is used, marking will also be required.


**Figure A5-1. Medium-intensity flashing-white obstacle lighting system, Type A**



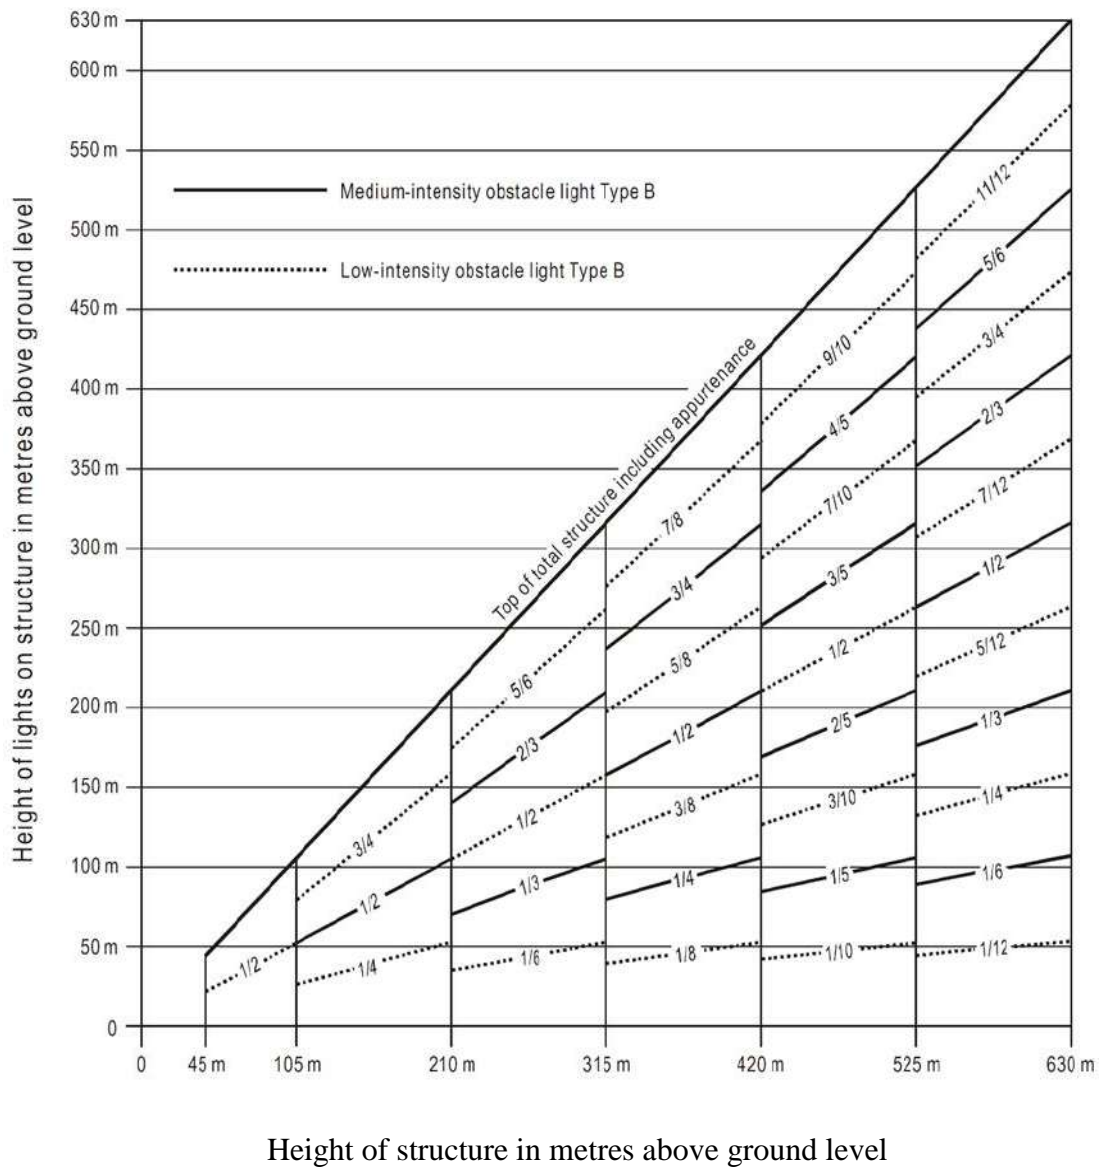


**Note:** For night-time use only.

**Figure A5-2. Medium-intensity flashing-red obstacle lighting system, Type B**

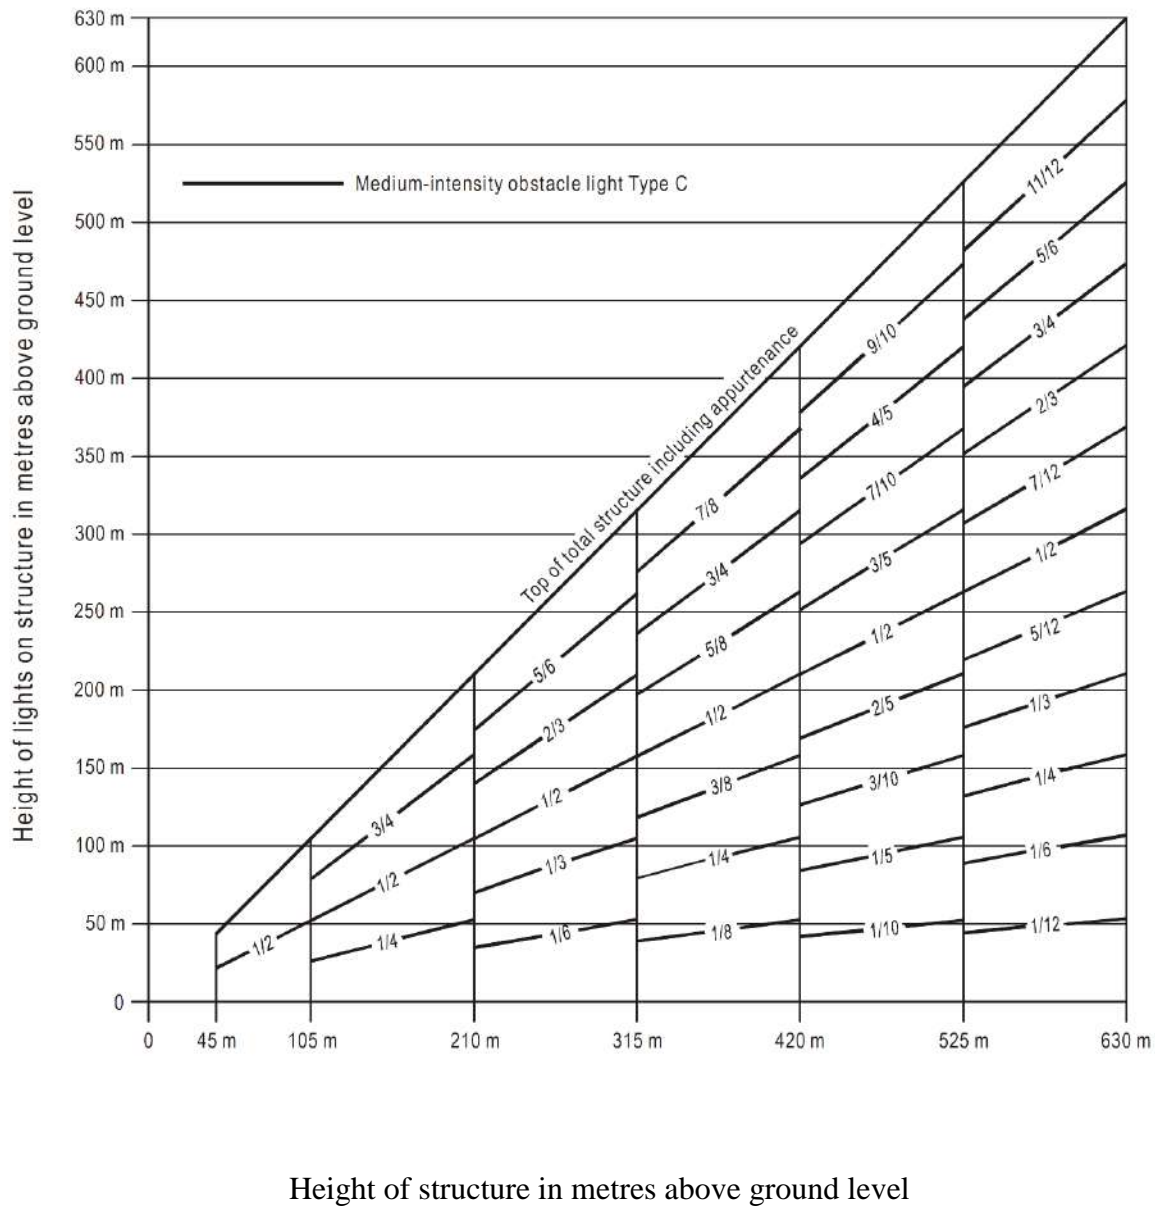


**Figure A5-3. Medium-intensity fixed-red obstacle lighting system, Type C**

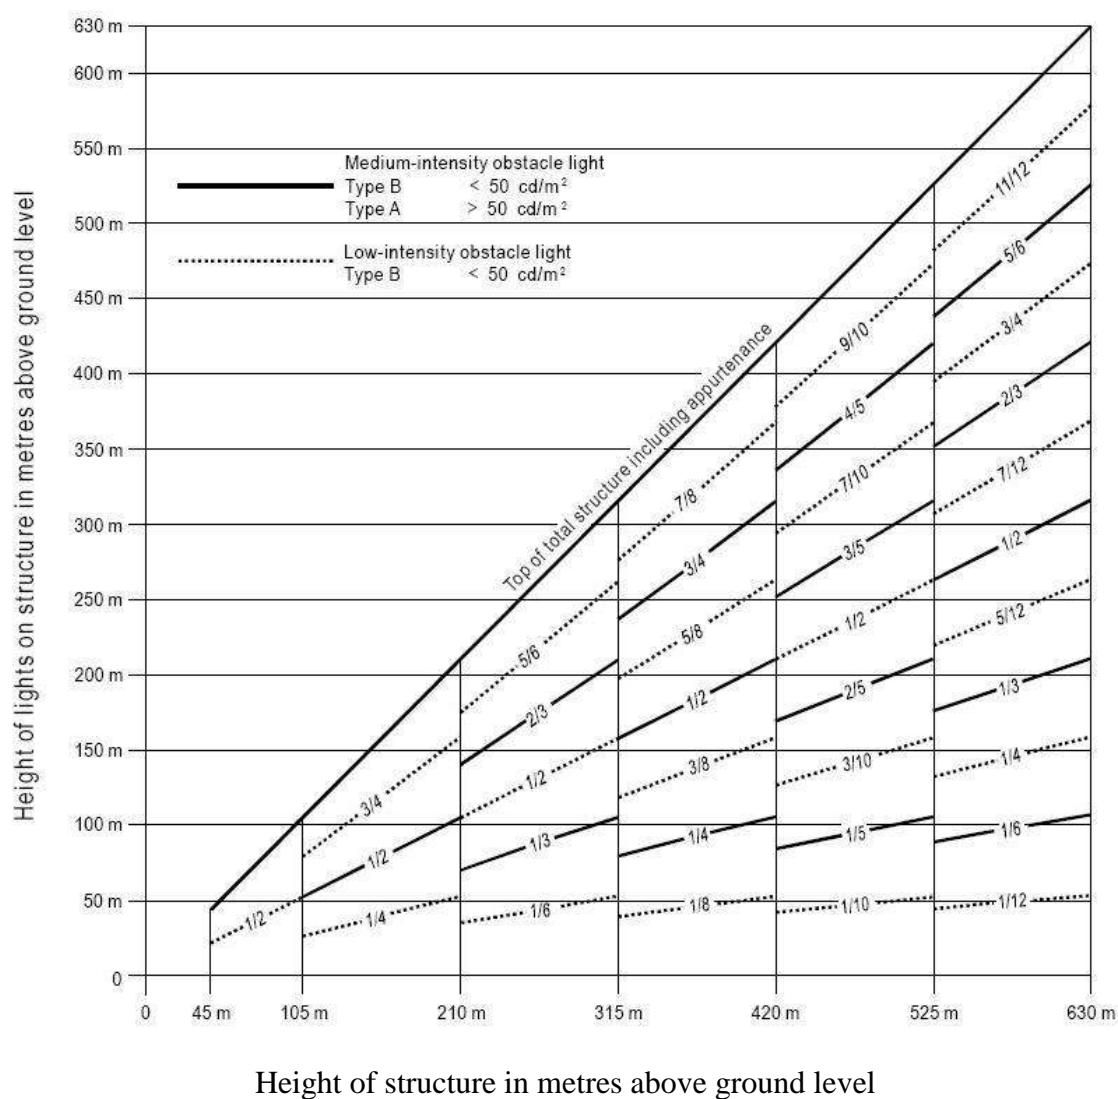


**Note:** High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level. If medium-intensity lighting is used, marking will also be required.

**Figure A5-4. Medium-intensity dual obstacle lighting system, Type A/Type B**

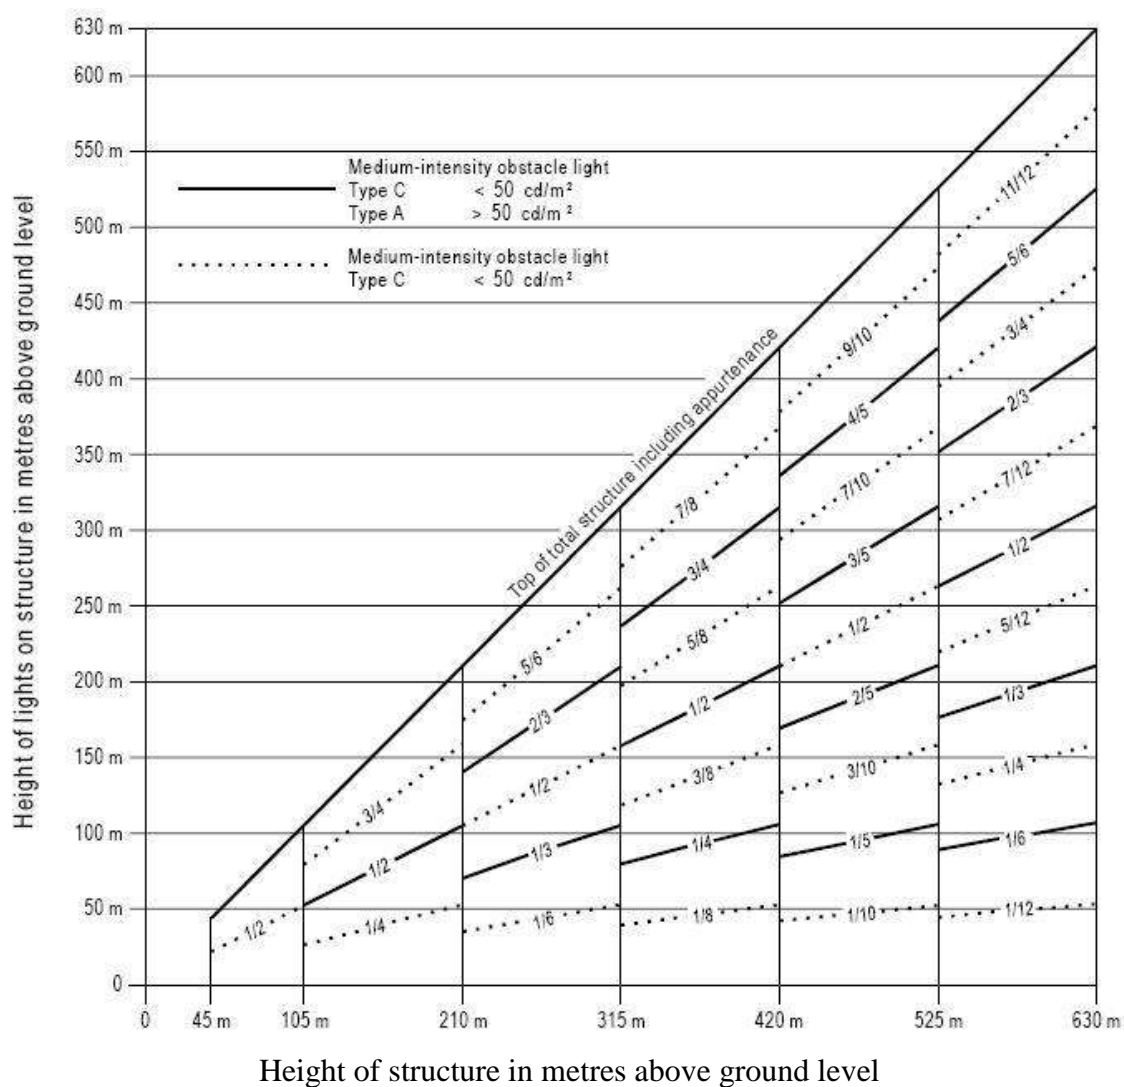


**Note:** High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level. If medium-intensity lighting is used, marking will also be required.


**Figure A5-5. Medium-intensity dual obstacle lighting system, Type A/Type C**

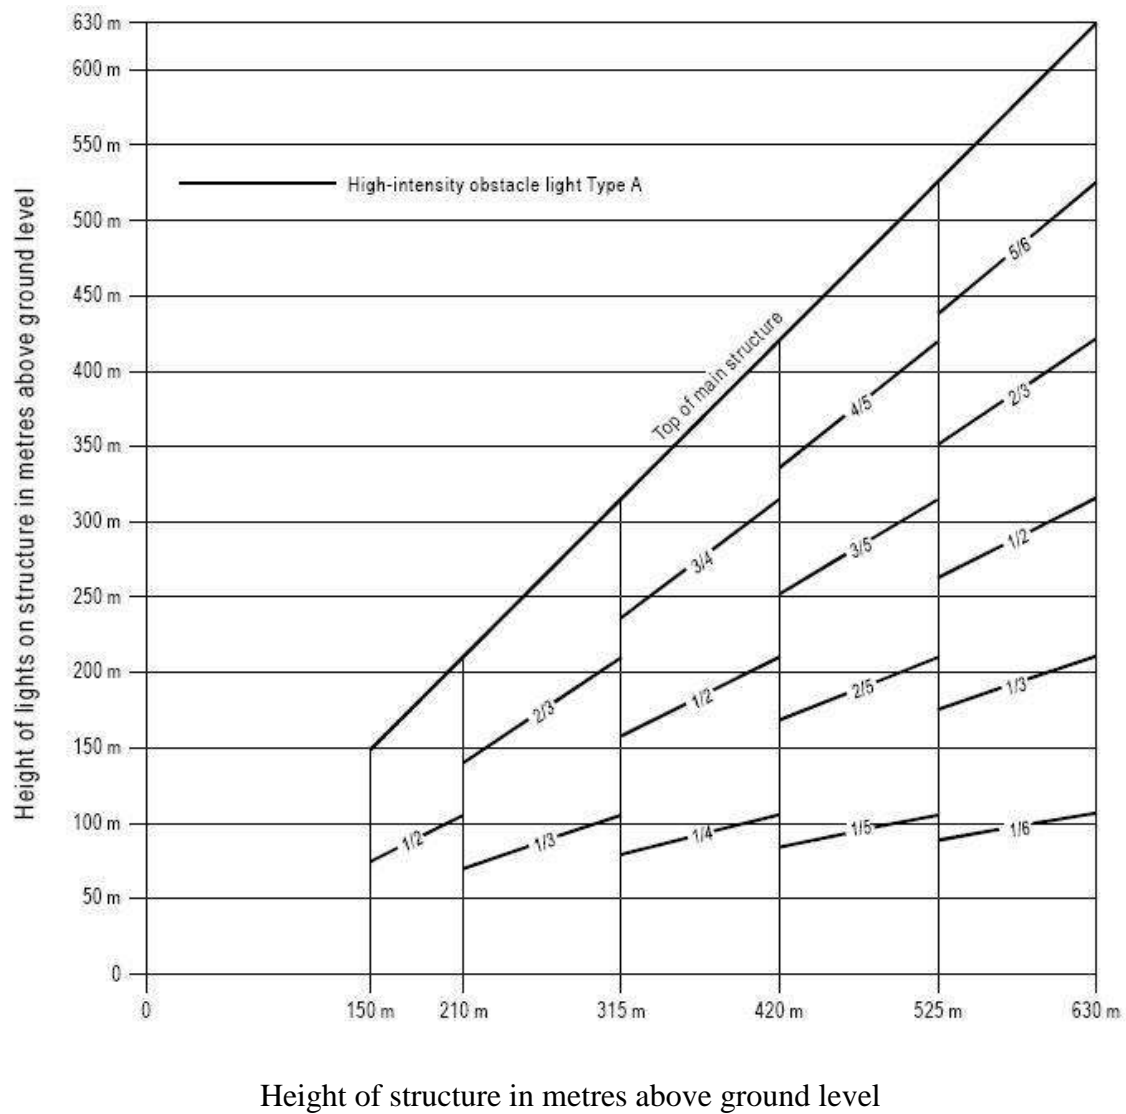

**Figure A5-6. High-intensity flashing-white obstacle lighting system, Type A**

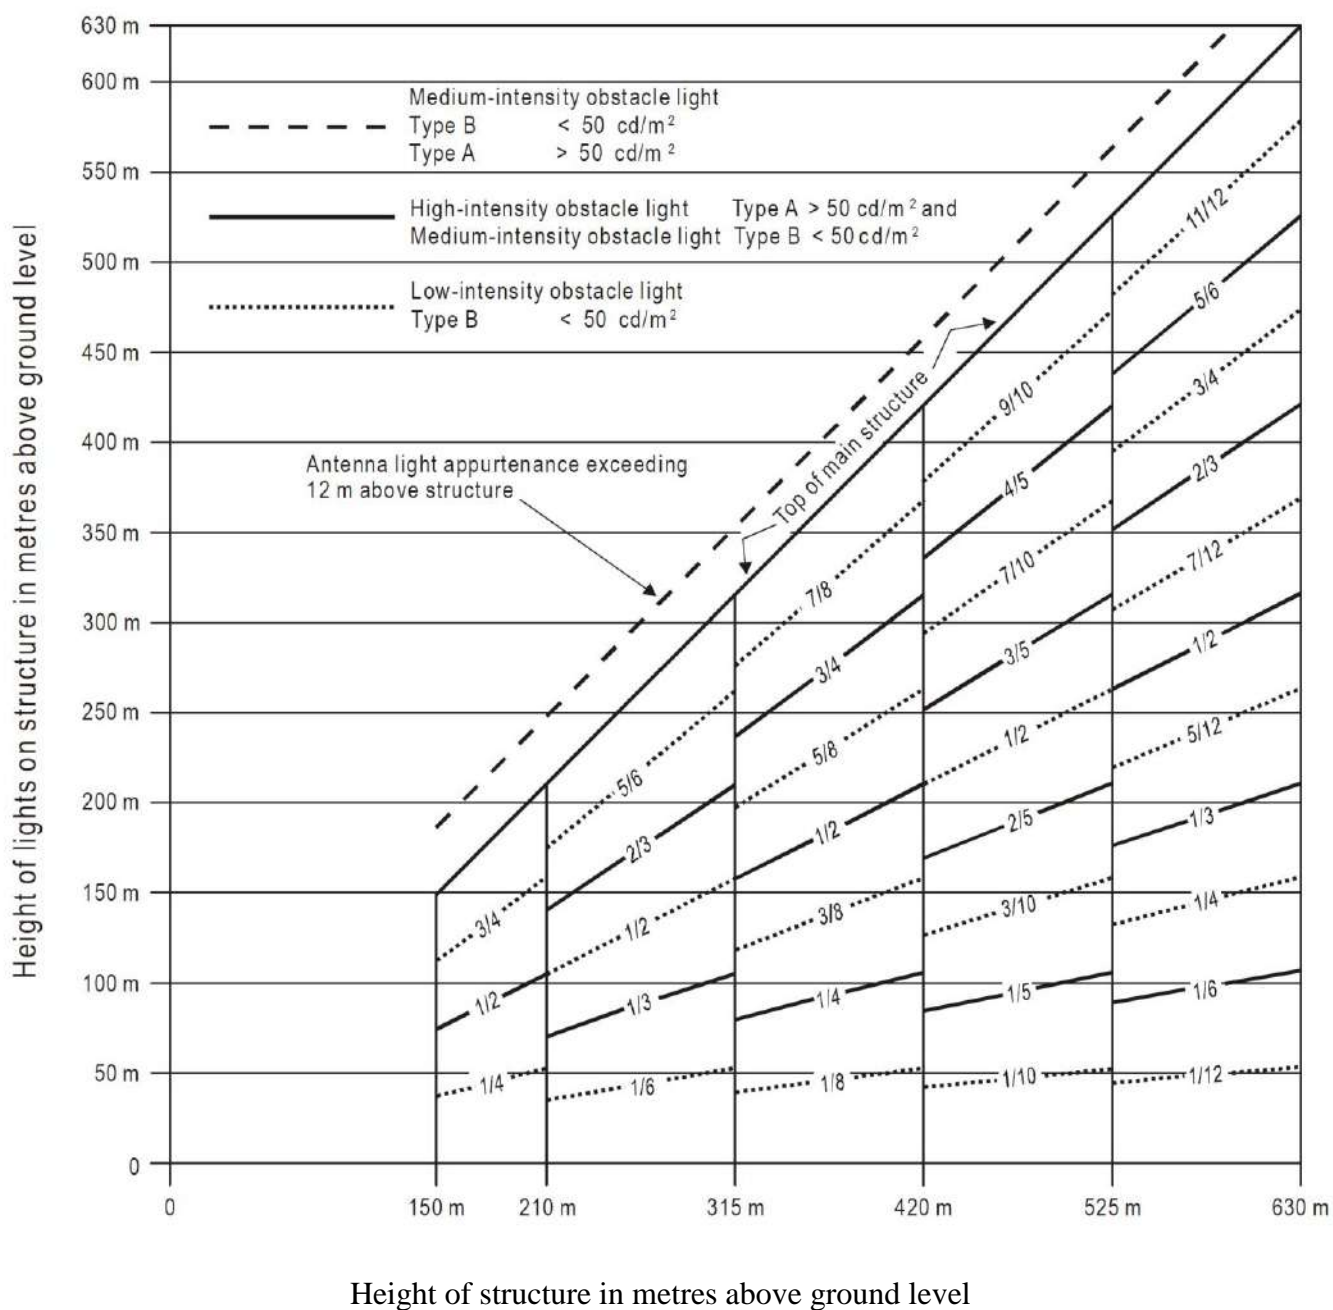

**Figure A5-7. High-/medium-intensity dual obstacle lighting system, Type A/Type B**

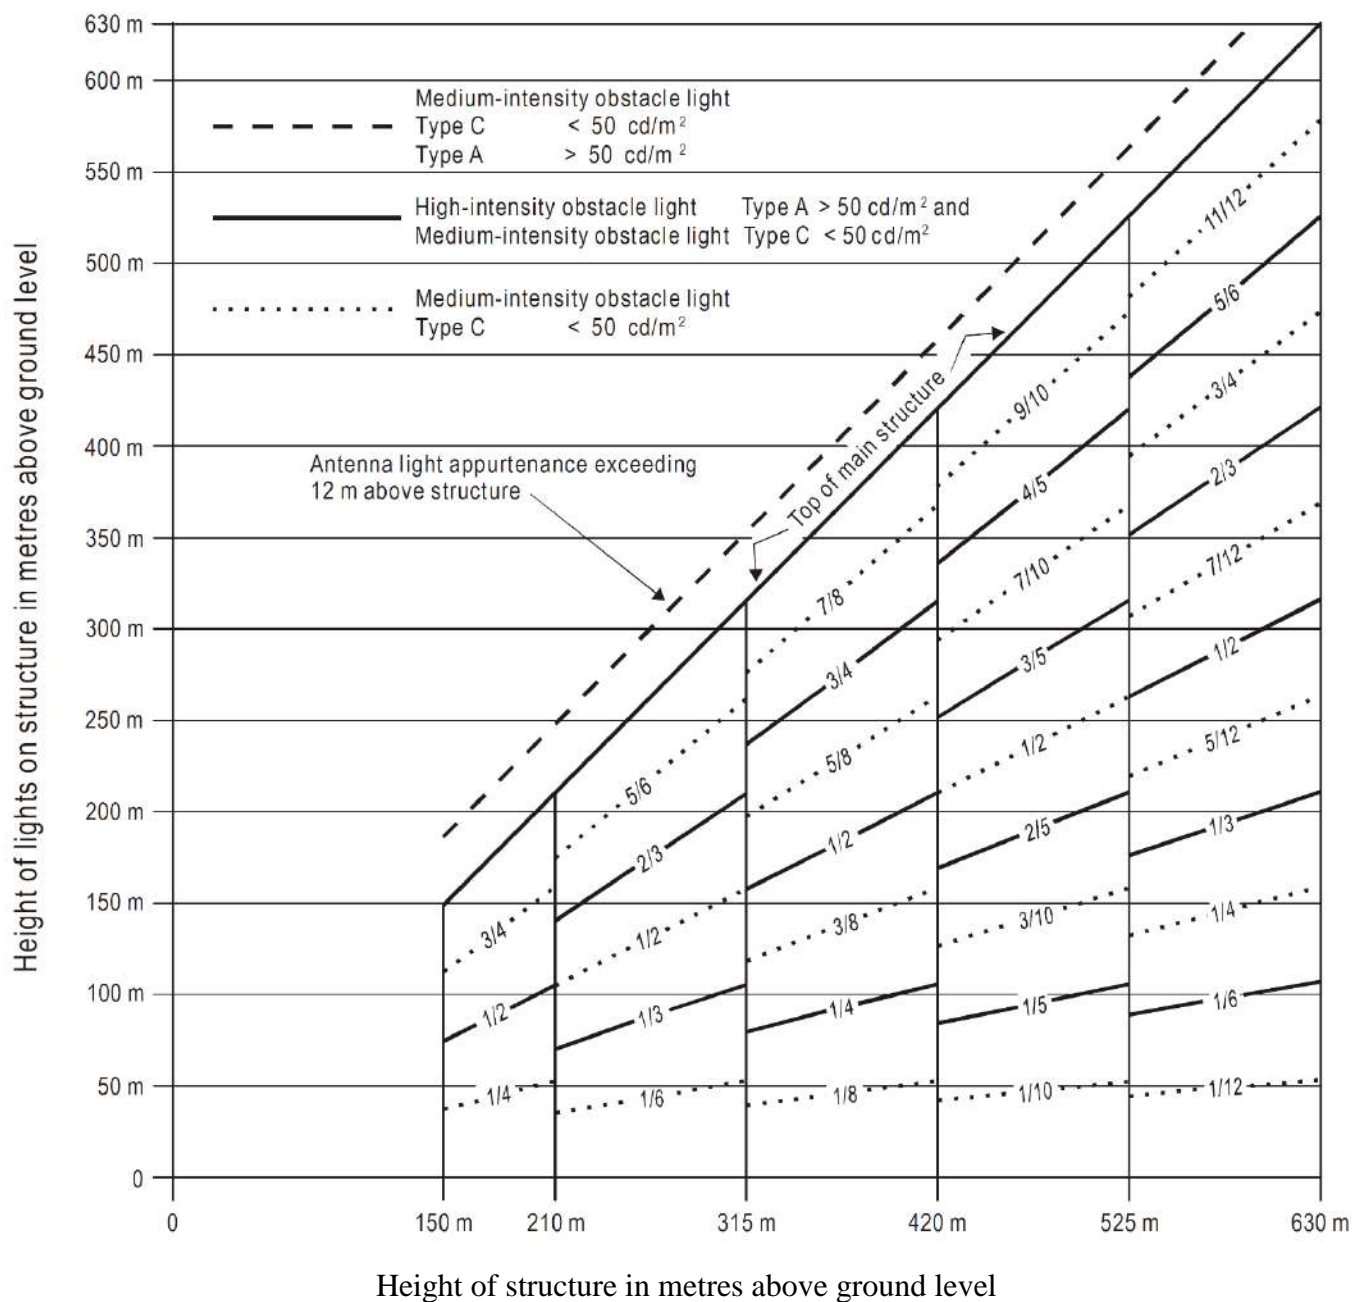

**Figure A5-8. High-/medium-intensity dual obstacle lighting system, Type A/Type C**

# **ATTACHMENTS**



---

## ATTACHMENT A. GUIDANCE MATERIAL SUPPLEMENTARY TO CAR 139 – Part 1.

### 1. Number, siting and orientation of runways

#### 1.1 Siting and orientation of runways

Many factors shall be taken into account in the determination of the siting and orientation of runways. Without attempting to provide an exhaustive list of these factors nor an analysis of their effects, it appears useful to indicate those which most frequently require study. These factors may be classified under four headings:

- 1.1.1 **Type of operation.** Attention shall be paid in particular to whether the aerodrome is to be used in all meteorological conditions or only in visual meteorological conditions, and whether it is intended for use by day and night, or only by day.
- 1.1.2 **Climatological conditions.** A study of the wind distribution shall be made to determine the usability factor. In this regard, the following comments shall be taken into account:

Wind statistics used for the calculation of the usability factor are normally available in ranges of speed and direction, and the accuracy of the results obtained depends, to a large extent, on the assumed distribution of observations within these ranges. In the absence of any sure information as to the true distribution, it is usual to assume a uniform distribution since, in relation to the most favourable runway orientations, this generally results in a slightly conservative usability factor.

The maximum mean crosswind components given in Chapter 3, 3.1.3, refer to normal circumstances. There are some factors which may require that a reduction of those maximum values be taken into account at a particular aerodrome. These include:

- 1. The wide variations which may exist, in handling characteristics and maximum permissible crosswind components, among diverse types of aeroplanes (including future types) within each of the three groups given in 3.1.3;
- 2. Prevalence and nature of gusts;
- 3. Prevalence and nature of turbulence;
- 4. The availability of a secondary runway;
- 5. The width of runways;
- 6. The runway surface conditions — water on the runway materially reduce the allowable crosswind component; and
- 7. The strength of the wind associated with the limiting crosswind component.

A study shall also be made of the occurrence of poor visibility and/or low cloud base. Account shall be taken of their frequency as well as the accompanying wind direction and speed.

#### 1.1.3 **Topography of the aerodrome site**, its approaches, and surroundings, particularly:

- a. Compliance with the obstacle limitation surfaces;
- b. Current and future land use. The orientation and layout shall be selected so as to protect as far as possible the particularly sensitive areas such as residential, school and hospital zones from the discomfort caused by aircraft noise.

---

Detailed information on this topic is provided in the Airport Planning Manual (Doc 9184), Part 2, and in Guidance on the Balanced Approach to Aircraft Noise Management (Doc 9829);

- c. Current and future runway lengths to be provided;
- d. Construction costs; and
- e. Possibility of installing suitable non-visual and visual aids for approach-to-land.

#### **1.1.4 Air traffic in the vicinity of the aerodrome, particularly:**

- a. Proximity of other aerodromes or ATS routes;
- b. Traffic density; and
- c. Air traffic control and missed approach procedures.

### **1.2 Number of runways in each direction**

The number of runways to be provided in each direction depends on the number of aircraft movements to be catered to.

## **2. Clearways and stopways**

**2.1** The decision to provide a stopway and/or a clearway as an alternative to an increased length of runway will depend on the physical characteristics of the area beyond the runway end, and on the operating performance requirements of the prospective aeroplanes. The runway, stopway and clearway lengths to be provided are determined by the aeroplane take-off performance, but a check shall also be made of the landing distance required by the aeroplanes using the runway to ensure that adequate runway length is provided for landing. The length of a clearway, however, cannot exceed half the length of take-off run available.

**2.2** The aeroplane performance operating limitations require a length which is enough to ensure that the aeroplane can, after starting a take-off, either be brought safely to a stop or complete the take-off safely. For the purpose of discussion it is supposed that the runway, stopway and clearway lengths provided at the aerodrome are only just adequate for the aeroplane requiring the longest take-off and accelerate-stop distances, taking into account its take-off mass, runway characteristics and ambient atmospheric conditions. Under these circumstances there is, for each take-off, a speed, called the decision speed; below this speed, the take-off must be abandoned if an engine fails, while above it the take-off must be completed. A very long take-off run and take-off distance would be required to complete a take-off when an engine fails before the decision speed is reached, because of the insufficient speed and the reduced power available. There would be no difficulty in stopping in the remaining accelerate-stop distance available provided action is taken immediately. In these circumstances the correct course of action would be to abandon the take-off.

**2.3** On the other hand, if an engine fails after the decision speed is reached, the aeroplane will have sufficient speed and power available to complete the take-off safely in the remaining take-off

distance available. However, because of the high speed, there would be difficulty in stopping the aeroplane in the remaining accelerate-stop distance available.

- 2.4** The decision speed is not a fixed speed for any aeroplane, but can be selected by the pilot within limits to suit the accelerate-stop and take-off distance available, aeroplane take-off mass, runway characteristics and ambient atmospheric conditions at the aerodrome. Normally, a higher decision speed is selected as the accelerate-stop distance available increases.
- 2.5** A variety of combinations of accelerate-stop distances required and take-off distances required can be obtained to accommodate a particular aeroplane, taking into account the aeroplane take-off mass, runway characteristics, and ambient atmospheric conditions. Each combination requires its particular length of take-off run.
- 2.6** The most familiar case is where the decision speed is such that the take-off distance required is equal to the accelerate-stop distance required; this value is known as the balanced field length. Where stopway and clearway are not provided, these distances are both equal to the runway length. However, if landing distance is for the moment ignored, runway is not essential for the whole of the balanced field length, as the take-off run required is, of course, less than the balanced field length. The balanced field length can, therefore, be provided by a runway supplemented by an equal length of clearway and stopway, instead of wholly as a runway. If the runway is used for take-off in both directions, an equal length of clearway and stopway has to be provided at each runway end. The saving in runway length is, therefore, bought at the cost of a greater overall length.
- 2.7** In case economic considerations preclude the provision of stopway and, as a result, only runway and clearway are to be provided, the runway length (neglecting landing requirements) shall be equal to the accelerate-stop distance required or the take-off run required, whichever is the greater. The take-off distance available will be the length of the runway plus the length of clearway.
- 2.8** The minimum runway length and the maximum stopway or clearway length to be provided may be determined as follows, from the data in the aeroplane flight manual for the aeroplane considered to be critical from the viewpoint of runway length requirements:
- If a stopway is economically possible, the lengths to be provided are those for the balanced field length. The runway length is the take-off run required or the landing distance required, whichever is the greater. If the accelerate-stop distance required is greater than the runway length so determined, the excess may be provided as stopway, usually at each end of the runway. In addition, a clearway of the same length as the stopway must also be provided;
  - If a stopway is not to be provided, the runway length is the landing distance required, or if it is greater, the accelerate-stop distance required, which corresponds to the lowest practical value of the decision speed. The excess of the take-off distance required over the runway length may be provided as clearway, usually at each end of the runway.
- 2.9** In addition to the above consideration, the concept of clearways in certain circumstances can be applied to a situation where the take-off distance required for all engines operating exceeds that required for the engine failure case.

- 2.10** The economy of a stopway can be entirely lost if, after each usage, it must be regraded and compacted. Therefore, it shall be designed to withstand at least a certain number of loadings of the aeroplane which the stopway is intended to serve without inducing structural damage to the aeroplane.

### **3. Calculation of declared distances**

- 3.1** The declared distances to be calculated for each runway direction comprise: the take-off run available (TORA), take-off distance available (TODA), accelerate-stop distance available (ASDA), and landing distance available (LDA).
- 3.2** Where a runway is not provided with a stopway or clearway and the threshold is located at the extremity of the runway, the four declared distances shall normally be equal to the length of the runway, as shown in Figure A-1 (A).
- 3.3** Where a runway is provided with a clearway (CWY), then the TODA will include the length of clearway, as shown in Figure A-1 (B).
- 3.4** Where a runway is provided with a stopway (SWY), then the ASDA will include the length of stopway, as shown in Figure A-1 (C).
- 3.5** Where a runway has a displaced threshold, then the LDA will be reduced by the distance the threshold is displaced, as shown in Figure A-1 (D). A displaced threshold affects only the LDA for approaches made to that threshold; all declared distances for operations in the reciprocal direction are unaffected.
- 3.6** Figures A-1 (B) through A-1 (D) illustrate a runway provided with a clearway or a stopway or having a displaced threshold. Where more than one of these features exist, then more than one of the declared distances will be modified — but the modification will follow the same principle illustrated. An example showing a situation where all these features exist is shown in Figure A-1 (E).
- 3.7** A suggested format for providing information on declared distances is given in Figure A-1. If a runway direction cannot be used for take-off or landing, or both, because it is operationally forbidden, then this shall be declared and the words “not usable” or the abbreviation “NU” entered.
- 3.8** When intersection take-offs are performed, the datum line from which the reduced runway declared distances for take-off are determined, should be defined by the intersection of the downwind edge as shown in the figure below:



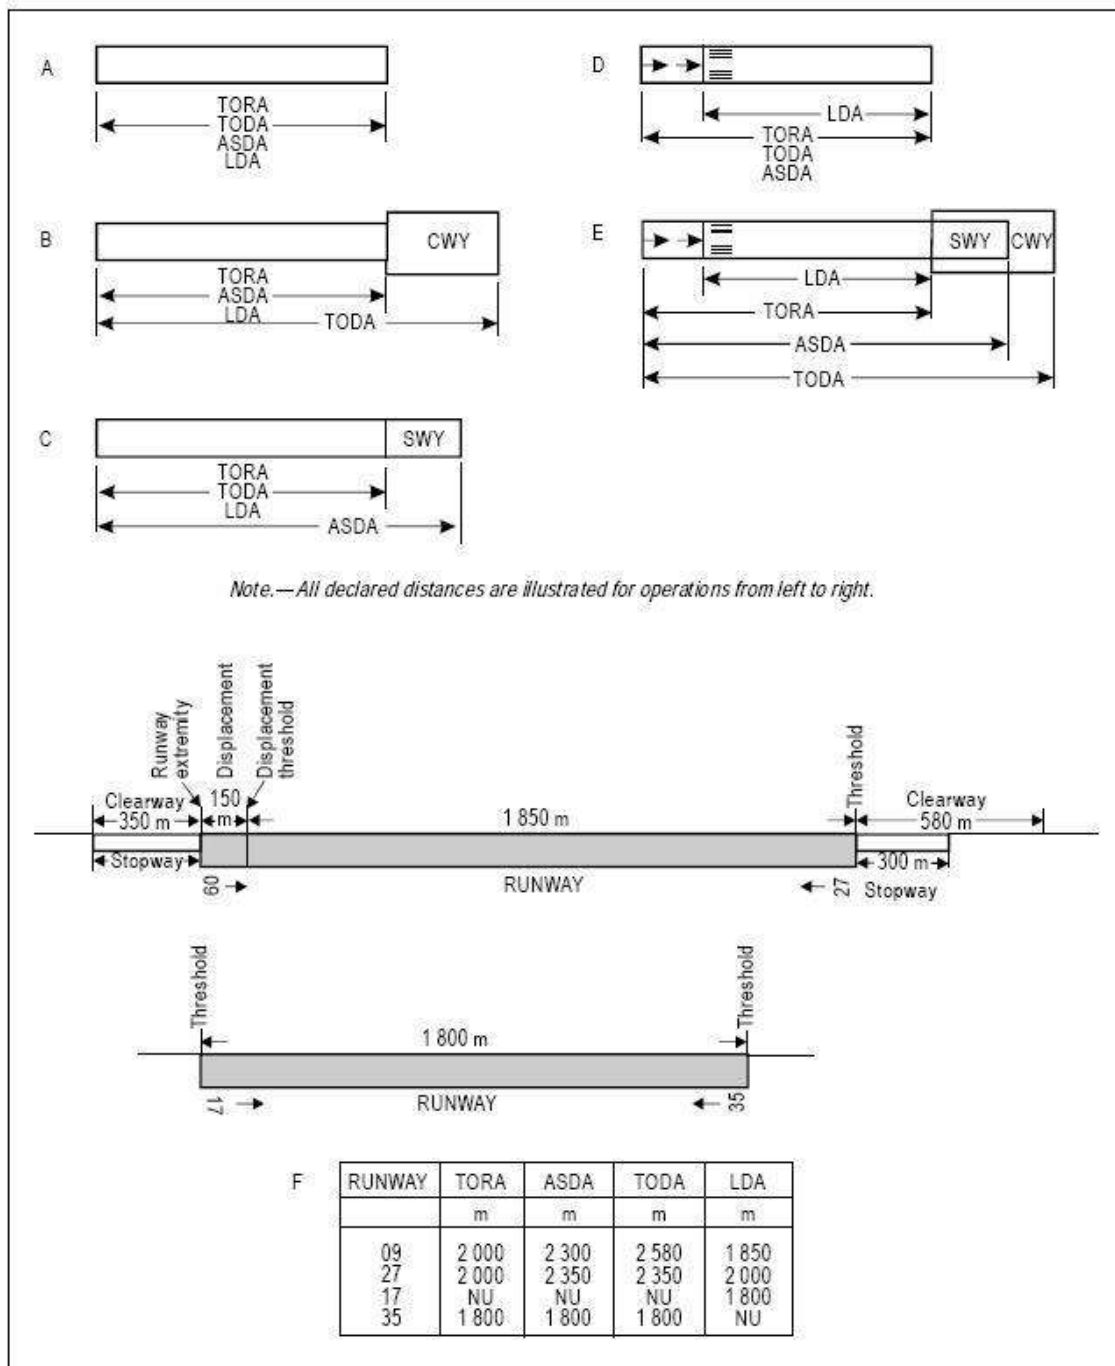


Figure A-1. Illustration of declared distances

---

#### **4. Slopes on a runway**

##### **4.1 Distance between slope changes**

The following example illustrates how the distance between slope changes is to be determined (see Figure A-2):

D for a runway where the code number is 3 shall be at least:

$$15\,000 (|x - y| + |y - z|) \text{ m}$$

$|x - y|$  being the absolute numerical value of  $x - y$

$|y - z|$  being the absolute numerical value of  $y - z$

Assuming  $x = +0.01$

$y = -0.005$

$z = +0.005$

Then  $|x - y| = 0.015$

$|y - z| = 0.01$

To comply with the specifications, D shall be not less than:

$$15\,000 (0.015 + 0.01) \text{ m,}$$

That is,  $15\,000 \times 0.025 = 375 \text{ m}$

##### **4.2 Consideration of longitudinal and transverse slopes**

When a runway is planned that will combine the extreme values for the slopes and changes in slope permitted under Chapter 3, 3.1.13 to 3.1.19, a study shall be made to ensure that the resulting surface profile will not hamper the operation of aeroplanes.

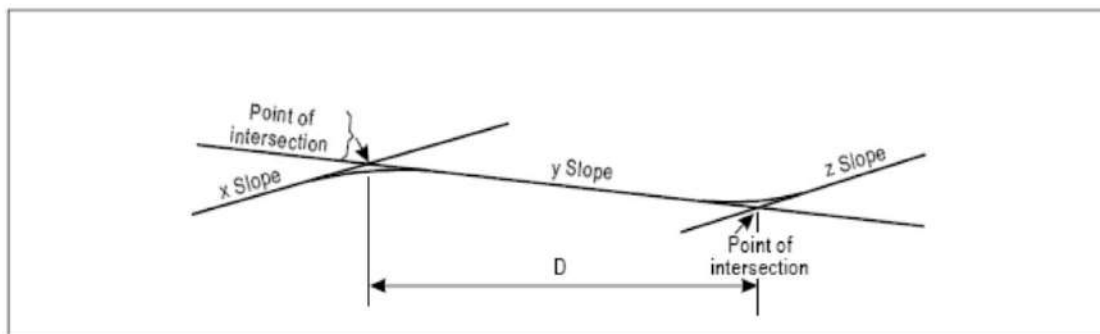


Figure A-2. Profile on centre line of runway

	Minimum acceptable length of irregularity (m)								
	3	6	9	12	15	20	30	45	60
Surface irregularity									
Maximum surface irregularity height (or depth) (cm)	3	3.5	4	5	5.5	6	6.5	8	10
Temporary acceptable surface irregularity height (or depth) (cm)	3.5	5.5	6.5	7.5	8	9	11	13	15

### 4.3 Radio altimeter operating area

In order to accommodate aeroplanes making auto-coupled approaches and automatic landings (irrespective of weather conditions) it is desirable that slope changes be avoided or kept to a minimum, on a rectangular area at least 300 m long before the threshold of a precision approach runway. The area shall be symmetrical about the extended centre line, 120 m wide. When special circumstances so warrant, the width may be reduced to no less than 60 m if an aeronautical study indicates that such reduction would not affect the safety of operations of aircraft. This is desirable because these aeroplanes are equipped with a radio altimeter for final height and flare guidance, and when the aeroplane is above the terrain immediately prior to the threshold, the radio altimeter will begin to provide information to the automatic pilot for auto-flare. Where slope changes cannot be avoided, the rate of change between two consecutive slopes shall not exceed 2 per cent per 30m.

---

**5. Runway surface evenness**

**5.1** In adopting tolerances for runway surface irregularities, the following standard of construction is achievable for short distances of 3 m and conforms to good engineering practice:

Except across the crown of a camber or across drainage channels, the finished surface of the wearing course is to be of such regularity that, when tested with a 3 m straight-edge placed anywhere in any direction on the surface, there is no deviation greater than 3 mm between the bottom of the straight-edge and the surface of the pavement anywhere along the straight-edge.

**5.2** Caution shall also be exercised when inserting runway lights or drainage grilles in runway surfaces to ensure that adequate smoothness of the surface is maintained.

**5.3** The operation of aircraft and differential settlement of surface foundations will eventually lead to increases in surface irregularities. Small deviations in the above tolerances will not seriously hamper aircraft operations. In general, isolated irregularities of the order of 2.5 cm to 3 cm over a 45 m distance are acceptable, as shown in Figure A-3. Although maximum acceptable deviations vary with the type and speed of an aircraft, the limits of acceptable surface irregularities can be estimated to a reasonable extent. The following table describes acceptable tolerable and excessive limits:

- a. if the surface irregularities exceed the heights defined by the acceptable limit curve but are less than the heights defined by the tolerable limit curve, at the specified minimum acceptable length, herein noted by the tolerable region, then maintenance action should be planned. The runway may remain in service. This region is the start of possible passenger and pilot discomfort;
- b. if the surface irregularities exceed the heights defined by the tolerable limit curve, but are less than the heights defined by the excessive limit curve, at the specified minimum acceptable length, herein noted by the excessive region, then maintenance corrective action is mandatory to restore the condition to the acceptable region. The runway may remain in service but be repaired within a reasonable period. This region could lead to the risk of possible aircraft structural damage due to a single event or fatigue failure over time; and
- c. if the surface irregularities exceed the heights defined by the excessive limit curve, at the specified minimum acceptable length, herein noted by the unacceptable region, then the area of the runway where the roughness has been identified warrants closure. Repairs must be made to restore the condition to within the acceptable limit region and the aircraft operators may be advised accordingly. This region runs the extreme risk of a structural failure and must be addressed immediately.




Surface irregularity	Length of irregularity (m)								
	3	6	9	12	15	20	30	45	60
Acceptable surface irregularity height (cm)	2.9	3.8	4.5	5	5.4	5.9	6.5	8.5	10
Tolerable surface irregularity height (cm)	3.9	5.5	6.8	7.8	8.6	9.6	11	13.6	16
Excessive surface irregularity height (cm)	5.8	7.6	9.1	10	10.8	11.9	13.9	17	20

Note that “surface irregularity” is defined herein to mean isolated surface elevation deviations that do not lie along a uniform slope through any given section of a runway. For the purposes of this concern, a “section of a runway” is defined herein to mean a segment of a runway throughout which a continuing general uphill, downhill or flat slope is prevalent. The length of this section is generally between 30 and 60 metres, and can be greater, depending on the longitudinal profile and the condition of the pavement.

The maximum tolerable step type bump, such as that which could exist between adjacent slabs, is simply the bump height corresponding to zero bump length at the upper end of the tolerable region of the roughness criteria of Figure A-3. The bump height at this location is 1.75 cm.

**5.4** Figure A-3 illustrates a comparison of the surface roughness criteria with those developed by the United States Federal Aviation Administration. Further guidance regarding temporary slopes for overlay works on operational runways can be found in Aerodrome Design Manual, Part 3 — Pavements (Doc 9157).

**5.5** Deformation of the runway with time may also increase the possibility of the formation of water pools. Pools as shallow as approximately 3 mm in depth, particularly if they are located where they are likely to be encountered at high speed by landing aeroplanes, can induce aquaplaning, which can then be sustained on a wet runway by a much shallower depth of water. Improved guidance regarding the significant length and depth of pools relative to aquaplaning is the subject of further research. It is, of course, especially necessary to prevent pools from forming whenever there is a possibility that they might become frozen.

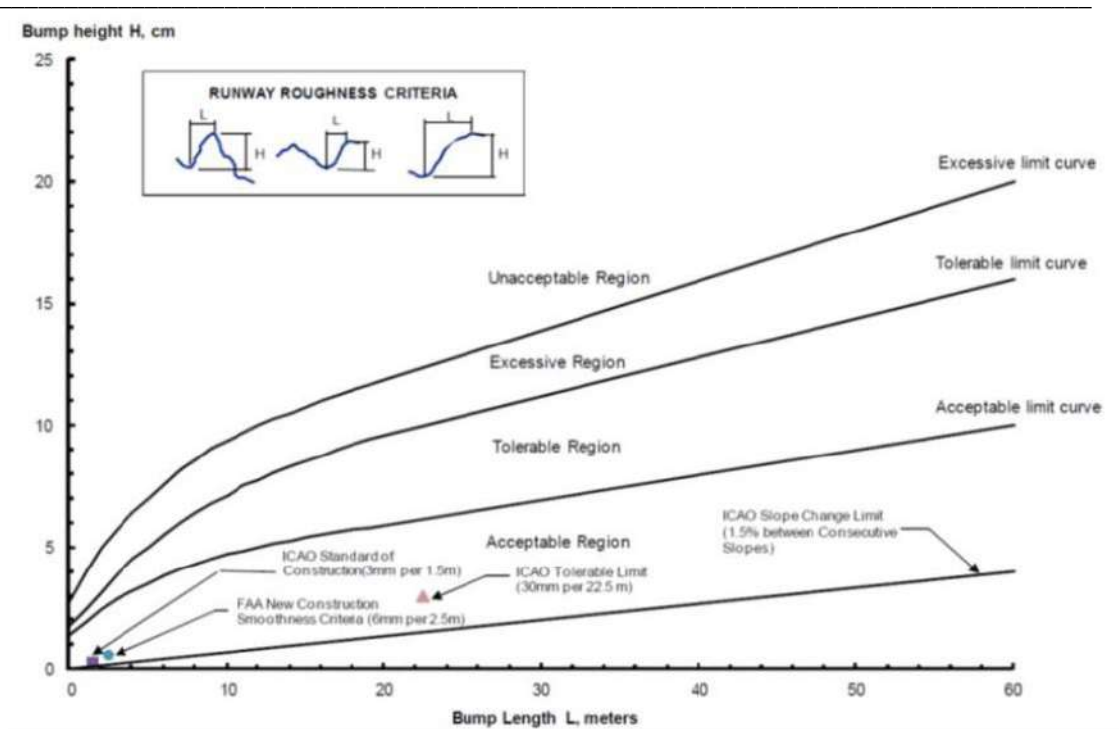

**Figure A-3. Comparison of roughness criteria**

**Note:** These criteria address single event roughness, not long wavelength harmonic effects nor the effect of repetitive surface undulations.

6. **Assessing the surface friction characteristics of snow-, slush-, ice- and frost-covered paved surfaces: N/A**
7. **Determination of surface friction characteristics for construction and maintenance purposes**

**Note:** The guidance in this section involves the functional measurement of friction-related aspects related to runway construction and maintenance. Excluded from this section is the operational, as opposed to functional, measurement of friction for contaminated runways. However, the devices used for functional measurement could also be used for operational measurement, but in the latter case, the figures given in Airport Services Manual (Doc 9137), Part 2, Table 3-1 are not relevant.

**7.1** The surface friction characteristics of a paved runway shall be:

- a. Assessed to verify the surface friction characteristics of new or resurfaced paved runways (Chapter 3, 3.1.25); and
- b. Assessed periodically in order to determine the slipperiness of paved runways (Chapter 10, 10.2.4).

**7.2** The condition of a runway pavement is generally assessed under dry conditions using a self-wetting continuous friction measuring device. Evaluation tests of runway surface friction characteristics are made on clean surfaces of the runway when first constructed or after resurfacing.

- 7.3** Friction tests of existing surface conditions are taken periodically in order to avoid falling below the minimum friction level specified by PACA. When the friction of any portion of a runway is found to be below this value, then such information is promulgated in a NOTAM specifying which portion of the runway is below the minimum friction level and its location on the runway. A corrective maintenance action must be initiated without delay. Friction measurements are taken at time intervals that will ensure the identification of runways in need of maintenance or of special surface treatment before their condition becomes serious. The time intervals and mean frequency of measurements depend on factors such as: aircraft type and frequency of usage, climatic conditions, pavement type, and pavement service and maintenance requirements.
- 7.4** Friction measurements of existing, new or resurfaced runways are made with a continuous friction measuring device provided with a smooth tread tire. The device shall use self-wetting features to allow measurements of the surface friction characteristics to be made at a water depth of 1 mm.
- 7.5** When it is suspected that the surface friction characteristics of a runway may be reduced because of poor drainage, owing to inadequate slopes or depressions, then an additional measurement is made, but this time under natural conditions representative of a local rain. This measurement differs from the previous one in that water depths in the poorly cleared areas are normally greater in a local rain condition. The measurement results are thus more apt to identify problem areas having low friction values that could induce aquaplaning than the previous test. If circumstances do not permit measurements to be conducted during natural conditions representative of a rain, then this condition may be simulated. (See section 8.)
- 7.6** When conducting friction tests using a self-wetting continuous friction measuring device, it is important to note that, a wet runway produces a drop in friction with an increase in speed. However, as the speed increases, the rate at which the friction is reduced becomes less. Among the factors affecting the friction coefficient between the tire and the runway surface, texture is particularly important. If the runway has a good macro-texture allowing the water to escape beneath the tire, then the friction value will be less affected by speed. Conversely, a low macro-texture surface will produce a larger drop in friction with increase in speed.
- 7.7** Annex 14, Volume I, requires Public Authority for Civil Aviation to specify a minimum friction level below which corrective maintenance action shall be taken. As criteria for surface friction characteristics of new or resurfaced runway surfaces and its maintenance planning, Public Authority for Civil Aviation has established a maintenance planning level below which appropriate corrective maintenance action shall be initiated to improve the friction. And The Airport Services Manual (Doc 9137), Part 2, also provides guidance on establishing maintenance planning and minimum friction levels for runway surfaces in use.

## **8. Drainage characteristics of the movement area and adjacent areas**

### **8.1 General**

- 8.1.1** Rapid drainage of surface water is a primary safety consideration in the design, construction and maintenance of the movement area and adjacent areas. The objective is to minimize water depth on the surface by draining water off the runway in the shortest path possible and particularly out of the area of the wheel path. There are two distinct drainage processes taking place:

- a. Natural drainage of the surface water from the top of the pavement surface until it reaches the final recipient such as rivers or other water bodies; and
- b. Dynamic drainage of the surface water trapped under a moving tire until it reaches outside the tire-to-ground contact area.

8.1.2 Both processes can be controlled through:

- a. Design;
- b. Construction; and
- c. Maintenance of the pavements in order to prevent accumulation of water on the pavement surface.

## 8.2 Design of pavement

- 8.2.1 Surface drainage is a basic requirement and serves to minimize water depth on the surface. The objective is to drain water off the runway in the shortest path. Adequate surface drainage is provided primarily by an appropriately sloped surface (in both the longitudinal and transverse directions). The resulting combined longitudinal and transverse slope is the path for the drainage run-off. This path can be shortened by adding transverse grooves.
- 8.2.2 Dynamic drainage is achieved through built-in texture in the pavement surface. The rolling tire builds up water pressure and squeezes the water out the escape channels provided by the texture. The dynamic drainage of the tire-to-ground contact area may be improved by adding transverse grooves provided that they are subject to rigorous maintenance.

## 8.3 Construction of pavement

- 8.3.1 Through construction, the drainage characteristics of the surface are built into the pavement. These surface characteristics are:
  - a. Slopes;
  - b. Texture:
    - Microtexture;
    - Macrottexture;
- 8.3.2 Slopes for the various parts of the movement area and adjacent parts are described in Chapter 3 and figures are given as per cent. Further guidance is given in the Aerodrome Design Manual (Doc 9157), Part 1, Chapter 5.
- 8.3.3 Texture in the literature is described as microtexture or macrottexture. These terms are understood differently in various parts of the aviation industry.
- 8.3.4 Microtexture is the texture of the individual stones and is hardly detectable by the eye. Microtexture is considered a primary component in skid resistance at slow speeds. On

a wet surface at higher speeds a water film may prevent direct contact between the surface asperities and the tire due to insufficient drainage from the tire-to-ground contact area.

- 8.3.5 Microtexture is a built-in quality of the pavement surface. By specifying crushed material that will withstand polishing microtexture, drainage of thin waterfilms are ensured for a longer period of time. Resistance against polishing is expressed in terms of the Polished Stone Values (PSV) which is in principle a value obtained from a friction measurement in accordance with international standards. These standards define the PSV minima that will enable a material with a good microtexture to be selected.
- 8.3.6 A major problem with microtexture is that it can change within short time periods without being easily detected. A typical example of this is the accumulation of rubber deposits in the touchdown area which will largely mask microtexture without necessarily reducing macrotexture.
- 8.3.7 Macrotexture is the texture among the individual stones. This scale of texture may be judged approximately by the eye. Macrotexture is primarily created by the size of aggregate used or by surface treatment of the pavement and is the major factor influencing drainage capacity at high speeds. Materials shall be selected so as to achieve good macrotexture.
- 8.3.8 The primary purpose of grooving a runway surface is to enhance surface drainage. Natural drainage can be slowed down by surface texture, but grooving can speed up the drainage by providing a shorter drainage path and increasing the drainage rate.
- 8.3.9 For measurement of macrotexture, simple methods such as the “sand and grease patch” methods described in the Airport Services Manual (Doc 9137), Part 2 were developed. These methods were used for the early research on which current airworthiness requirements are based, which refer to a classification categorizing macrotexture from A to E. This classification was developed, using sand or grease patch measuring techniques, and issued in 1971 by the Engineering Sciences Data Unit (ESDU).

*Runway classification based on texture information from ESDU 71026:*

<i>Classification</i>	<i>Texture depths (mm)</i>
<b>A</b>	0.10 – 0.14
<b>B</b>	0.15 – 0.24
<b>C</b>	0.25 – 0.50
<b>D</b>	0.51 – 1.00
<b>E</b>	1.01 – 2.54

- 8.3.10 Using this classification, the threshold value between microtexture and macrotexture is 0.1 mm mean texture depth (MTD). Related to this scale, the normal wet runway aircraft performance is based upon texture giving drainage and friction qualities midway between classification B and C (0.25 mm). Improved drainage through better texture might qualify for a better aircraft performance class. However such credit must

be in accordance with aeroplane manufacturers' documentation and agreed by Public Authority for Civil Aviation. Presently credit is given to grooved or porous friction course runways following design, construction and maintenance criteria acceptable to Public Authority for Civil Aviation. The harmonized certification standards of some States refer to texture giving drainage and friction qualities midway between classification D and E (1.0 mm).

- 8.3.11 For construction, design and maintenance, States use various international standards. Currently ISO 13473-1: Characterization of pavement texture by use of surface profiles — Part 1: *Determination of Mean Profile Depth* links the volumetric measuring technique with non-contact profile measuring techniques giving comparable texture values. These standards describe the threshold value between microtexture and macrotexture as 0.5 mm. The volumetric method has a validity range from 0.25 to 5 mm MTD. The profilometry method has a validity range from 0 to 5 mm mean profile depth (MPD). The values of MPD and MTD differ due to the finite size of the glass spheres used in the volumetric technique and because the MPD is derived from a two-dimensional profile rather than a three-dimensional surface. Therefore a transformation equation must be established for the measuring equipment used to relate MPD to MTD.
- 8.3.12 The ESDU scale groups runway surfaces based on macrotexture from A through E, where E represents the surface with best dynamic drainage capacity. The ESDU scale thus reflects the dynamic drainage characteristics of the pavement. Grooving any of these surfaces enhances the dynamic drainage capacity. The resulting drainage capacity of the surface is thus a function of the texture (A through E) and grooving. The contribution from grooving is a function of the size of the grooves and the spacing between the grooves. Aerodromes exposed to heavy or torrential rainfall must ensure that the pavement and adjacent areas have drainage capability to withstand these rainfalls or put limitations on the use of the pavements under such extreme situations. These airports shall seek to have the maximum allowable slopes and the use of aggregates providing good drainage characteristics. They shall also consider grooved pavements in the E classification to ensure that safety is not impaired.

#### 8.4 Maintenance of drainage characteristics of pavement

- 8.4.1 Macrotexture does not change within a short timespan but accumulation of rubber can fill up the texture and as such reduce the drainage capacity, which can result in impaired safety. Furthermore the runway structure may change overtime and give unevenness which results in ponding after rainfall. Guidance on rubber removal and unevenness can be found in the Airport Services Manual (Doc 9137), Part 2. Guidance on methods for improving surface texture can be found in the Aerodrome Design Manual (Doc 9157), Part 3.
- 8.4.2 When groovings are used, the condition of the grooves shall be regularly inspected to ensure that no deterioration has occurred and that the grooves are in good condition. Guidance on maintenance of pavements is available in the Airport Services Manual (Doc 9137), Part 2 — *Pavement Surface Conditions* and Part 9 — Airport Maintenance Practices and the Aerodrome Design Manual (Doc 9157), Part 2.
- 8.4.3 The pavement may be shot blasted in order to enhance the pavement macrotexture.

## 9. Strips

### 9.1 Shoulders


- 9.1.1 The shoulder of a runway or stopway shall be prepared or constructed so as to minimize any hazard to an aeroplane running off the runway or stopway. Some guidance is given in the following paragraphs on certain special problems which may arise, and on the further question of measures to avoid the ingestion of loose stones or other objects by turbine engines.
- 9.1.2 In some cases, the bearing strength of the natural ground in the strip may be sufficient, without special preparation, to meet the requirements for shoulders. Where special preparation is necessary, the method used will depend on local soil conditions and the mass of the aeroplanes the runway is intended to serve. Soil tests will help in determining the best method of improvement (e.g. drainage, stabilization, surfacing, light paving).
- 9.1.3 Attention shall also be paid when designing shoulders to prevent the ingestion of stones or other objects by turbine engines. Similar considerations apply here to those which are discussed for the margins of taxiways in the *Aerodrome Design Manual* (Doc 9157), Part 2, both as to the special measures which may be necessary and as to the distance over which such special measures, if required, shall be taken.
- 9.1.4 Where shoulders have been treated specially, either to provide the required bearing strength or to prevent the presence of stones or debris, difficulties may arise because of a lack of visual contrast between the runway surface and that of the adjacent strip. This difficulty can be overcome either by providing a good visual contrast in the surfacing of the runway or strip, or by providing a runway side stripe marking.

### 9.2 Objects on strips

Within the general area of the strip adjacent to the runway, measures shall be taken to prevent an aeroplane's wheel, when sinking into the ground, from striking a hard vertical face. Special problems may arise for runway light fittings or other objects mounted in the strip or at the intersection with a taxiway or another runway. In the case of construction, such as runways or taxiways, where the surface must also be flush with the strip surface, a vertical face can be eliminated by chamfering from the top of the construction to not less than 30 cm below the strip surface level. Other objects, the functions of which do not require them to be at surface level, shall be buried to a depth of not less than 30 cm.

### 9.3 Grading of a strip for precision approach runways

Chapter 3, 3.4.8, recommends that the portion of a strip of an instrument runway within at least 75 m from the centre line shall be graded where the code number is 3 or 4. For a precision approach runway, it may be desirable to adopt a greater width where the code number is 3 or 4. Figure A-4 shows the shape and dimensions of a wider strip that may be considered for such a runway. This strip has been designed using information on aircraft running off runways. The portion to be graded extends to a distance of 105 m from the centre line, except that the distance is gradually reduced to 75 m from the centre line at both ends of the strip, for a length of 150 m from the runway end.

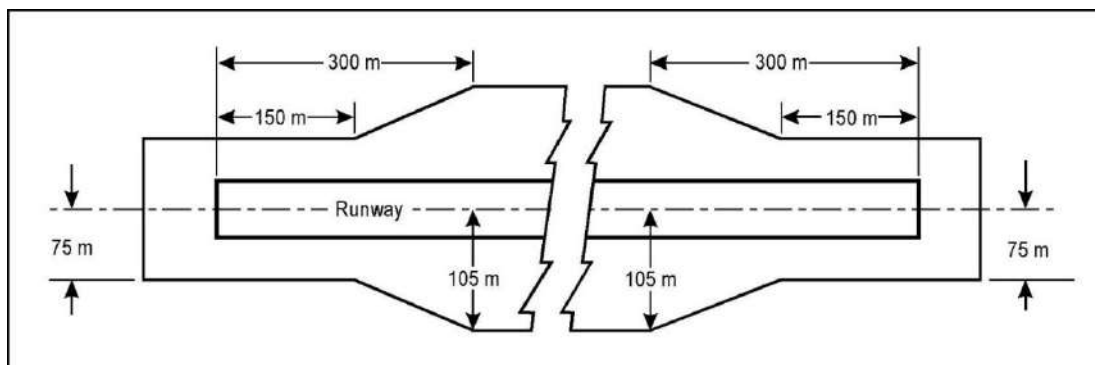

**Figure A-4. Graded portion of a strip including a precision approach runway where the code number is 3 or 4**

## **10. Runway end safety areas**

- 10.1** Where a runway end safety area is provided in accordance with Chapter 3, consideration should be given to providing an area long enough to contain overruns and undershoots resulting from a reasonably probable combination of adverse operational factors. On a precision approach runway, the ILS localizer is normally the first upstanding obstacle, and the runway end safety area shall extend up to this facility. In other circumstances, the first upstanding obstacle may be a road, a railroad or other constructed or natural feature. The provision of a runway end safety area shall take such obstacles into consideration.
- 10.2** Where provision of a runway end safety area would be particularly prohibitive to implement, consideration would have to be given to reducing some of the declared distances of the runway for the provision of a runway end safety area and installation of an arresting system.
- 10.3** Research programmes, as well as evaluation of actual aircraft overruns into arresting systems, have demonstrated that the performance of some arresting systems can be predictable and effective in arresting aircraft overruns.
- 10.4** Demonstrated performance of an arresting system can be achieved by a validated design method, which can predict the performance of the system. The design and performance shall be based on the type of aircraft anticipated to use the associated runway that imposes the greatest demand upon the arresting system.
- 10.5** The design of an arresting system must consider multiple aircraft parameters, including but not limited to, allowable aircraft gear loads, gear configuration, tire contact pressure, aircraft centre of gravity and aircraft speed. Accommodating undershoots must also be addressed. Additionally, the design must allow the safe operation of fully loaded rescue and fire fighting vehicles, including their ingress and egress.
- 10.6** The information relating to the provision of a runway end safety area and the presence of an arresting system shall be published in the AIP.
- 10.7** Additional information is contained in the Aerodrome Design Manual (Doc 9157), Part 1.



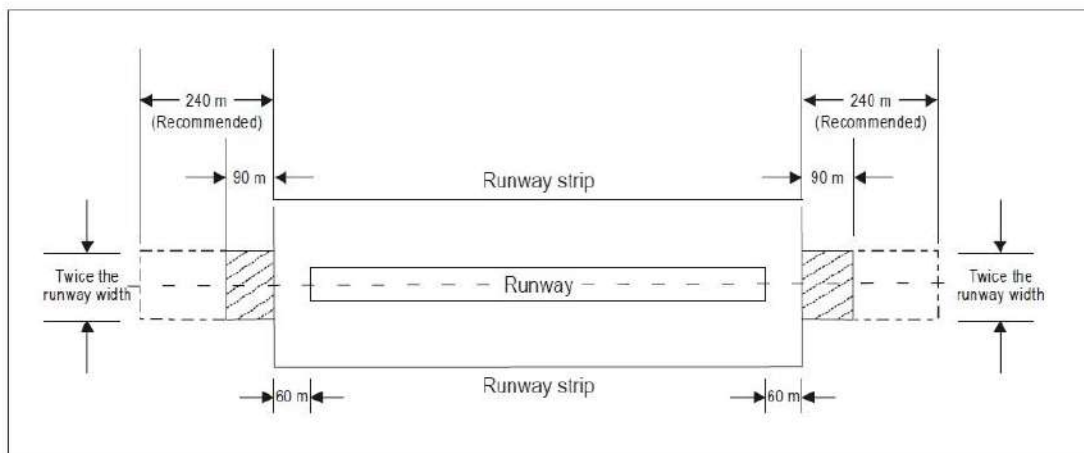


Figure A-5. Runway end safety area for a runway where the code number is 3 or 4

## 11. Location of threshold

### 11.1 General

11.1.1 The threshold is normally located at the extremity of a runway, if there are no obstacles penetrating above the approach surface. In some cases, however, due to local conditions it may be desirable to displace the threshold permanently (see below). When studying the location of a threshold, consideration shall also be given to the height of the ILS reference datum and/or MLS approach reference datum and the determination of the obstacle clearance limits. (Specifications concerning the height of the ILS reference datum and MLS approach reference datum are given in Annex 10, volume 1)

11.1.2 In determining that no obstacles penetrate above the approach surface, account shall be taken of mobile objects (vehicles on roads, trains, etc.) at least within that portion of the approach area within 1 200 m longitudinally from the threshold and of an overall width of not less than 150 m.

### 11.2 Displaced threshold

11.2.1 If an object extends above the approach surface and the object cannot be removed, consideration shall be given to displacing the threshold permanently.

11.2.2 To meet the obstacle limitation objectives of Chapter 4, the threshold shall ideally be displaced down the runway for the distance necessary to provide that the approach surface is cleared of obstacles.

11.2.3 However, displacement of the threshold from the runway extremity will inevitably cause reduction of the landing distance available, and this may be of greater operational significance than penetration of the approach surface by marked and lighted obstacles. A decision to displace the threshold, and the extent of such displacement, shall therefore have regard to an optimum balance between the considerations of clear approach surfaces and adequate landing distance. In deciding this question, account will need to be taken of the types of aeroplanes which the runway is intended to serve, the limiting visibility and cloud base conditions under which the runway will be used,

---

the position of the obstacles in relation to the threshold and extended centre line and, in the case of a precision approach runway, the significance of the obstacles to the determination of the obstacle clearance limit.

- 11.2.4 Notwithstanding the consideration of landing distance available, the selected position for the threshold shall not be such that the obstacle free surface to the threshold is steeper than 3.3 per cent where the code number is 4 or steeper than 5 per cent where the code number is 3.
- 11.2.5 In the event of a threshold being located according to the criteria for obstacle free surfaces in the preceding paragraph, the obstacle marking requirements of Chapter 6 shall continue to be met in relation to the displaced threshold.
- 11.2.6 Depending on the length of the displacement, the RVR at the threshold could differ from that at the beginning of the runway for take-offs. The use of red runway edge lights with photometric intensities lower than the nominal value of 10 000 cd for white lights increases that phenomenon. The impact of a displaced threshold on take-off minima shall be assessed by the Public Authority for Civil Aviation.
- 11.2.7 Marking and lighting of displaced thresholds and some operational recommendations can be found in 5.2.4.9, 5.2.4.10, 5.3.5.5, 5.3.8.1, 5.3.9.7, 5.3.10.3, 5.3.10.7 and 5.3.12.6 of CAR 139.

## 12. Approach lighting systems

### 12.1 Types and characteristics

12.1.1 The specifications in this volume provide for the basic characteristics for simple and precision approach lighting systems. For certain aspects of these systems, some latitude is permitted, for example, in the spacing between centre line lights and crossbars. The approach lighting patterns that have been generally adopted are shown in Figures A-7 and A-8. A diagram of the inner 300 m of the precision approach category II and III lighting system is shown in Figure 5-14.

12.1.2 The approach lighting configuration is to be provided irrespective of the location of the threshold, i.e. whether the threshold is at the extremity of the runway or displaced from the runway extremity. In both cases, the approach lighting system shall extend up to the threshold. However, in the case of a displaced threshold, inset lights are used from the runway extremity up to the threshold to obtain the specified configuration. These inset lights are designed to satisfy the structural requirements specified in Chapter 5, 5.3.1.9, and the photometric requirements specified in Appendix 2, Figure A2-1 or A2-2.

12.1.3 Flight path envelopes to be used in designing the lighting are shown in Figure A-6.

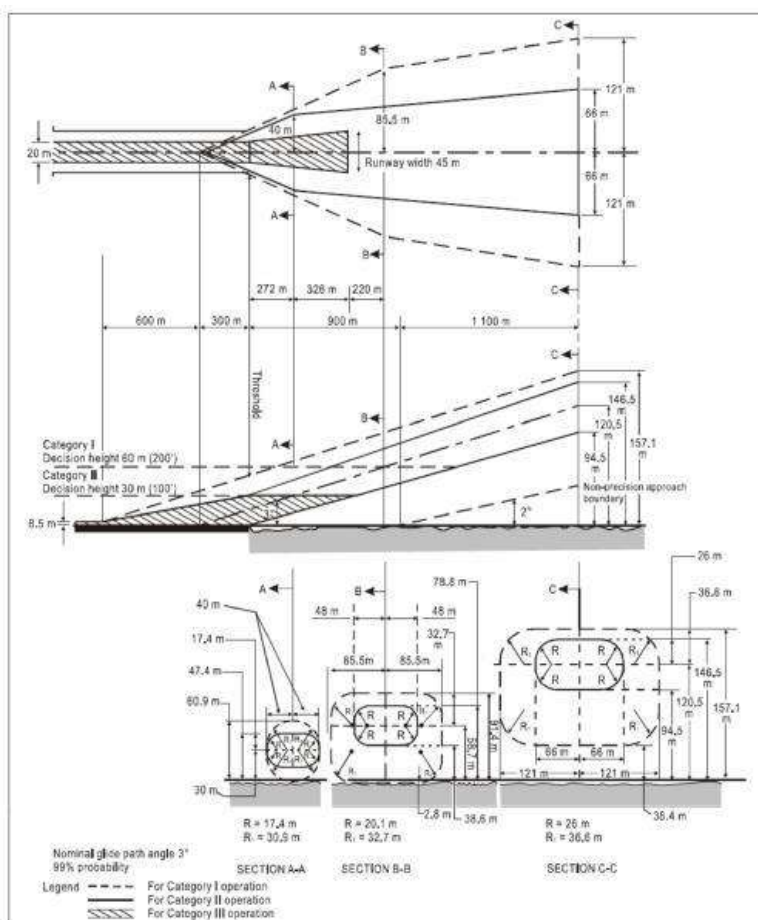


Figure A-6. Flight path envelopes to be used for lighting design for category I, II and III operations

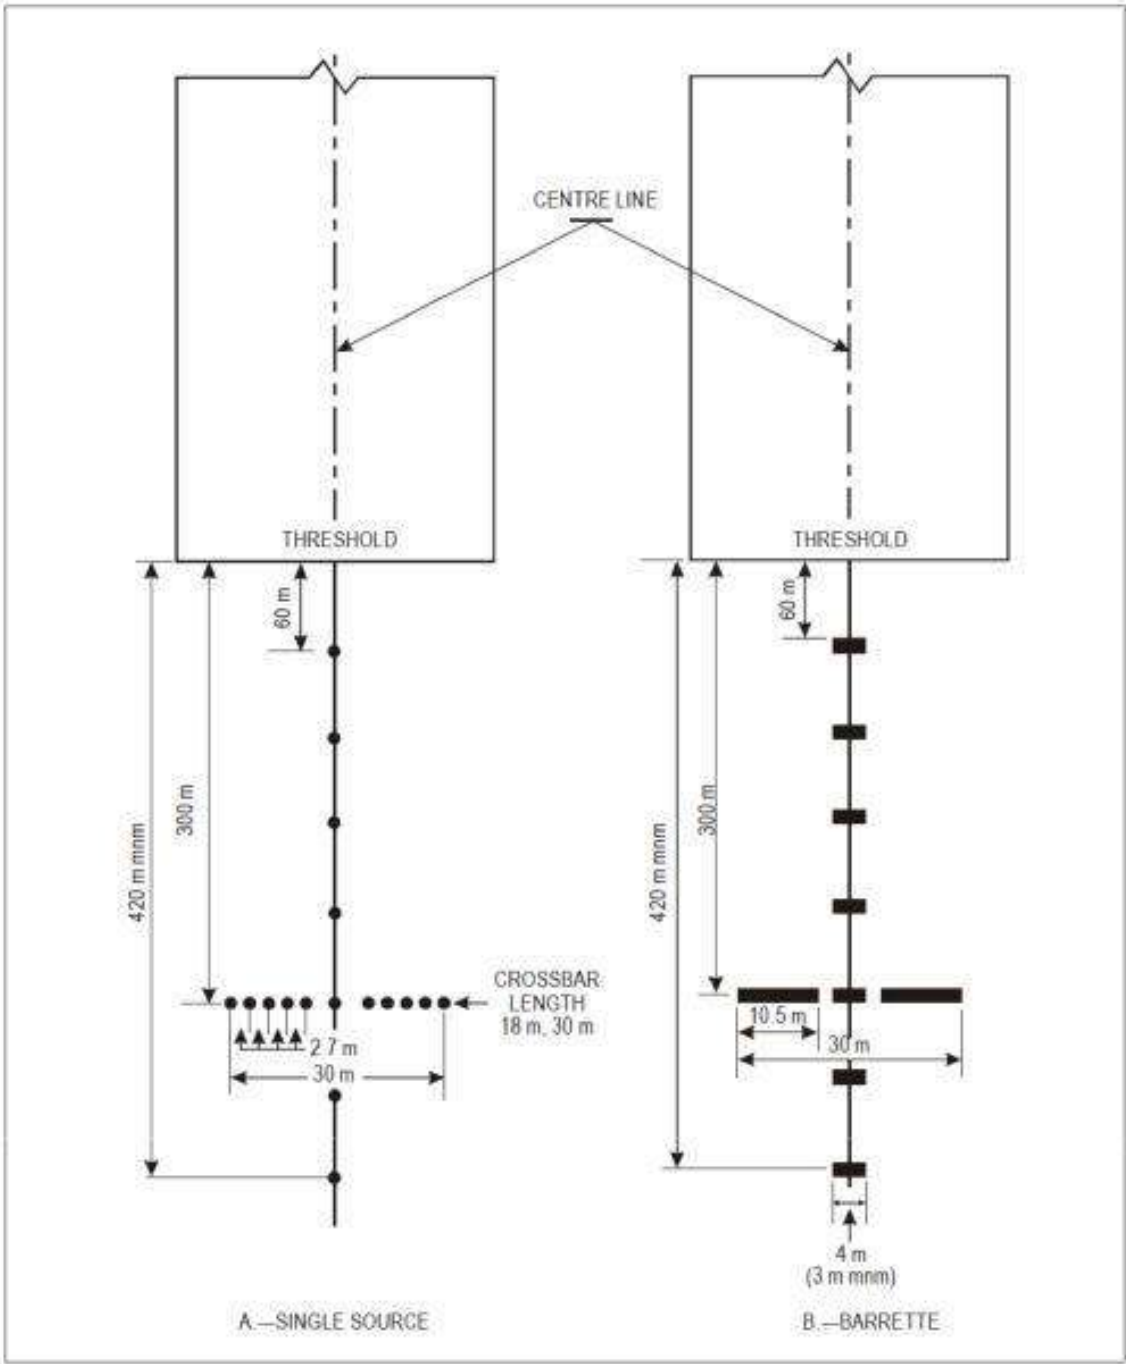


Figure A-7. Simple approach lighting systems

---

## 12.2 Installation tolerances

### *Horizontal*

- 12.2.1 The dimensional tolerances are shown in Figure A-8.
- 12.2.2 The centre line of an approach lighting system shall be as coincident as possible with the extended centre line of the runway with a maximum tolerance of  $\pm 15'$ .
- 12.2.3 The longitudinal spacing of the centre line lights shall be such that one light (or group of lights) is located in the centre of each crossbar, and the intervening centre line lights are spaced as evenly as practicable between two crossbars or a crossbar and a threshold.
- 12.2.4 The crossbars and barrettes shall be at right angles to the centre line of the approach lighting system with a tolerance of  $\pm 30'$ , if the pattern in Figure A-8 (A) is adopted or  $\pm 2^\circ$ , if Figure A-8 (B) is adopted.
- 12.2.5 When a crossbar has to be displaced from its standard position, any adjacent crossbar shall, where possible, be displaced by appropriate amounts in order to reduce the differences in the crossbar spacing.
- 12.2.6 When a crossbar in the system shown in Figure A-8 (A) is displaced from its standard position, its overall length shall be adjusted so that it remains one-twentieth of the actual distance of the crossbar from the point of origin. It is not necessary, however, to adjust the standard 2.7 m spacing between the crossbar lights, but the crossbars shall be kept symmetrical about the centre line of the approach lighting.

### *Vertical*

- 12.2.7 The ideal arrangement is to mount all the approach lights in the horizontal plane passing through the threshold (see Figure A-9), and this shall be the general aim as far as local conditions permit. However, buildings, trees, etc., shall not obscure the lights from the view of a pilot who is assumed to be  $1^\circ$  below the electronic glide path in the vicinity of the outer marker.
- 12.2.8 Within a stopway or clearway, and within 150 m of the end of a runway, the lights shall be mounted as near to the ground as local conditions permit in order to minimize risk of damage to aeroplanes in the event of an overrun or undershoot. Beyond the stopway and clearway, it is not so necessary for the lights to be mounted close to the ground, and therefore undulations in the ground contours can be compensated for by mounting the lights on poles of appropriate height.
- 12.2.9 It is desirable that the lights be mounted so that, as far as possible, no object within a distance of 60 m on each side of the centre line protrudes through the plane of the approach lighting system. Where a tall object exists within 60 m of the centre line and within 1 350 m from the threshold for a precision approach lighting system, or 900 m for a simple approach lighting system, it may be advisable to install the lights so that the plane of the outer half of the pattern clears the top of the object.
- 12.2.10 In order to avoid giving a misleading impression of the plane of the ground, the lights shall not be mounted below a gradient of 1 in 66 downwards from the threshold to a point 300 m out, and below a gradient of 1 in 40 beyond the 300 m point. For a precision

approach category II and III lighting system, more stringent criteria may be necessary, e.g. negative slopes not permitted within 450 m of the threshold.

12.2.11 *Centre line.* The gradients of the centre line in any section (including a stopway or clearway) shall be as small as practicable, and the changes in gradients shall be as few and small as can be arranged and shall not exceed 1 in 60. Experience has shown that as one proceeds outwards from the runway, rising gradients in any section of up to 1 in 66, and falling gradients of down to 1 in 40, are acceptable.

12.2.12 *Crossbars.* The crossbar lights shall be so arranged as to lie on a straight line *passing* through the associated centre line lights, and wherever possible this line shall be horizontal. It is permissible, however, to mount the lights on a transverse gradient not more than 1 in 80, if this enables crossbar lights within a stopway or clearway to be mounted nearer to the ground on sites where there is a cross-fall.

### 12.3 Clearance of obstacles

12.3.1 An area, hereinafter referred to as the light plane, has been established for obstacle clearance purposes, and all lights of the system are in this plane. This plane is rectangular in shape and symmetrically located about the approach lighting system's centre line. It starts at the threshold and extends 60 m beyond the approach end of the system, and is 120 m wide.

12.3.2 No objects are permitted to exist within the boundaries of the light plane which are higher than the light plane except as designated herein. All roads and highways are considered as obstacles extending 4.8 m above the crown of the road, except aerodrome service roads where all vehicular traffic is under control of the aerodrome authorities and coordinated with the aerodrome traffic control tower. Railroads, regardless of the amount of traffic, are considered as obstacles extending 5.4 m above the top of the rails.


12.3.3 It is recognized that some components of electronic landing aids systems, such as reflectors, antennas, monitors, etc., must be installed above the light plane. Every effort shall be made to relocate such components outside the boundaries of the light plane. In the case of reflectors and monitors, this can be done in many instances.

12.3.4 Where an ILS localizer is installed within the light plane boundaries, it is recognized that the localizer, or screen if used, must extend above the light plane. In such cases the height of these structures shall be held to a minimum and they shall be located as far from the threshold as possible. In general the rule regarding permissible heights is 15 cm for each 30 m the structure is located from the threshold. As an example, if the localizer is located 300 m from the threshold, the screen will be permitted to extend above the plane of the approach lighting system by  $10 \times 15 = 150$  cm maximum, but preferably shall be kept as low as possible consistent with proper operation of the ILS.

12.3.5 In locating an MLS azimuth antenna the guidance contained in Annex 10 Volume I, Attachment G, shall be followed. This material, which also provides guidance on collocating an MLS azimuth antenna with an ILS localizer antenna, suggests that the MLS azimuth antenna may be sited within the light plane boundaries where it is not possible or practical to locate it beyond the outer end of the approach lighting for the

opposite direction of approach. If the MLS azimuth antenna is located on the extended centre line of the runway, it shall be as far as possible from the closest light position to the MLS azimuth antenna in the direction of the runway end. Furthermore, the MLS azimuth antenna phase centre shall be at least 0.3 m above the light centre of the light position closest to the MLS azimuth antenna in the direction of the runway end. (This could be relaxed to 0.15 m if the site is otherwise free of significant multipath problems.) Compliance with this requirement, which is intended to ensure that the MLS signal quality is not affected by the approach lighting system, could result in the partial obstruction of the lighting system by the MLS azimuth antenna. To ensure that the resulting obstruction does not degrade visual guidance beyond an acceptable level, the MLS azimuth antenna shall not be located closer to the runway end than 300 m and the preferred location is 25 m beyond the 300 m crossbar (this would place the antenna 5 m behind the light position 330 m from the runway end). Where an MLS azimuth antenna is so located, a central part of the 300 m crossbar of the approach lighting system would alone be partially obstructed. Nevertheless, it is important to ensure that the unobstructed lights of the crossbar remain serviceable all the time.

- 12.3.6 Objects existing within the boundaries of the light plane, requiring the light plane to be raised in order to meet the criteria contained herein, shall be removed, lowered or relocated where this can be accomplished more economically than raising the light plane.
- 12.3.7 In some instances objects may exist which cannot be removed, lowered or relocated economically. These objects may be located so close to the threshold that they cannot be cleared by the 2 per cent slope. Where such conditions exist and no alternative is possible, the 2 per cent slope may be exceeded or a “stair step” resorted to in order to keep the approach lights above the objects. Such “step” or increased gradients shall be resorted to only when it is impracticable to follow standard slope criteria, and they shall be held to the absolute minimum. Under this criterion no negative slope is permitted in the outermost portion of the system.

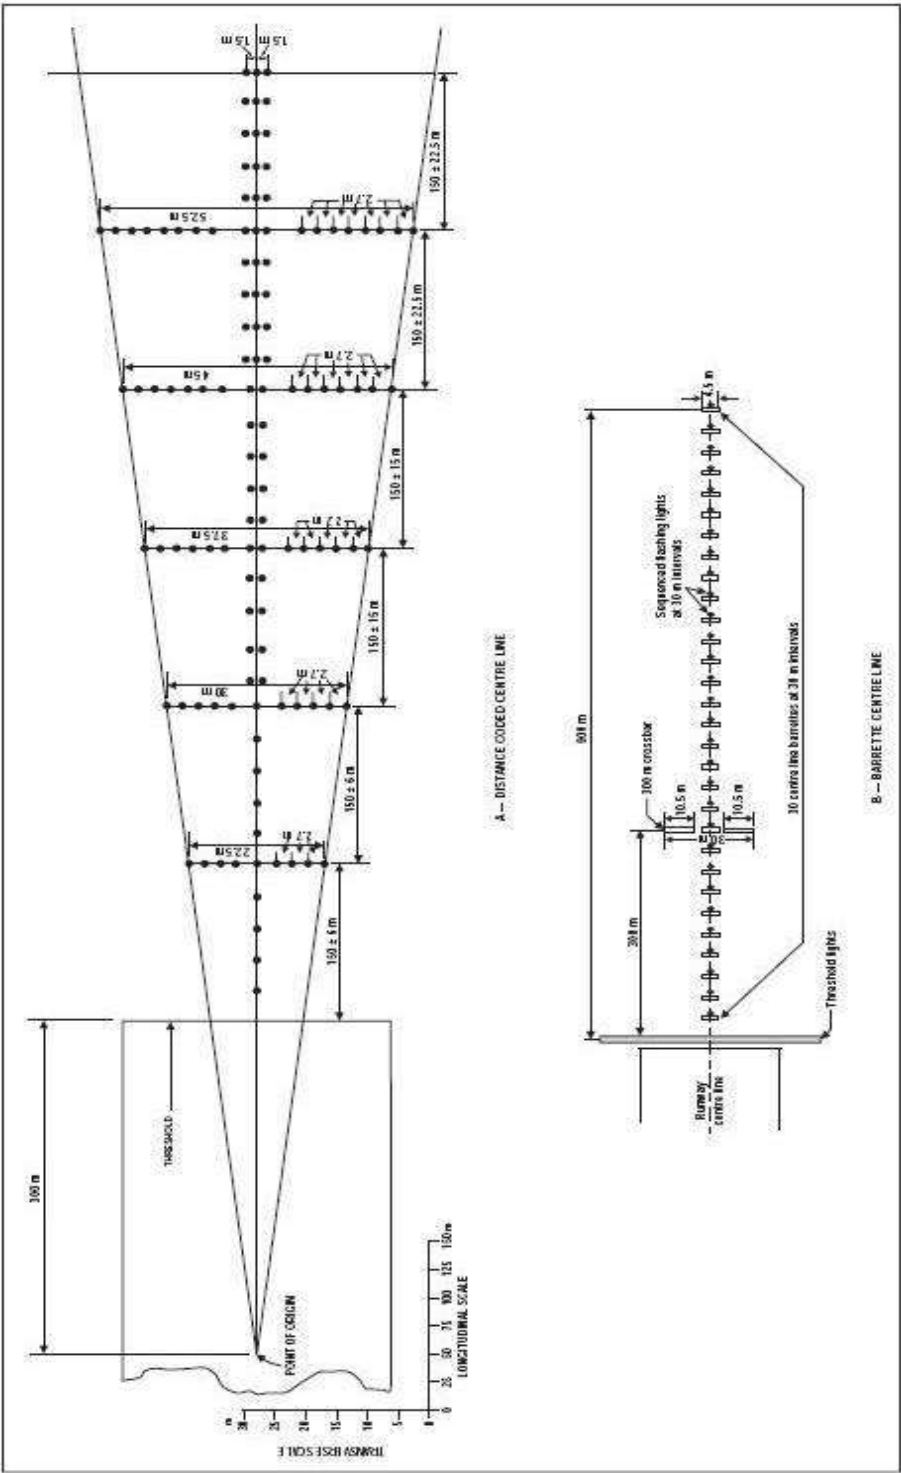



**Figure A-8. Precision approach category I lighting system**

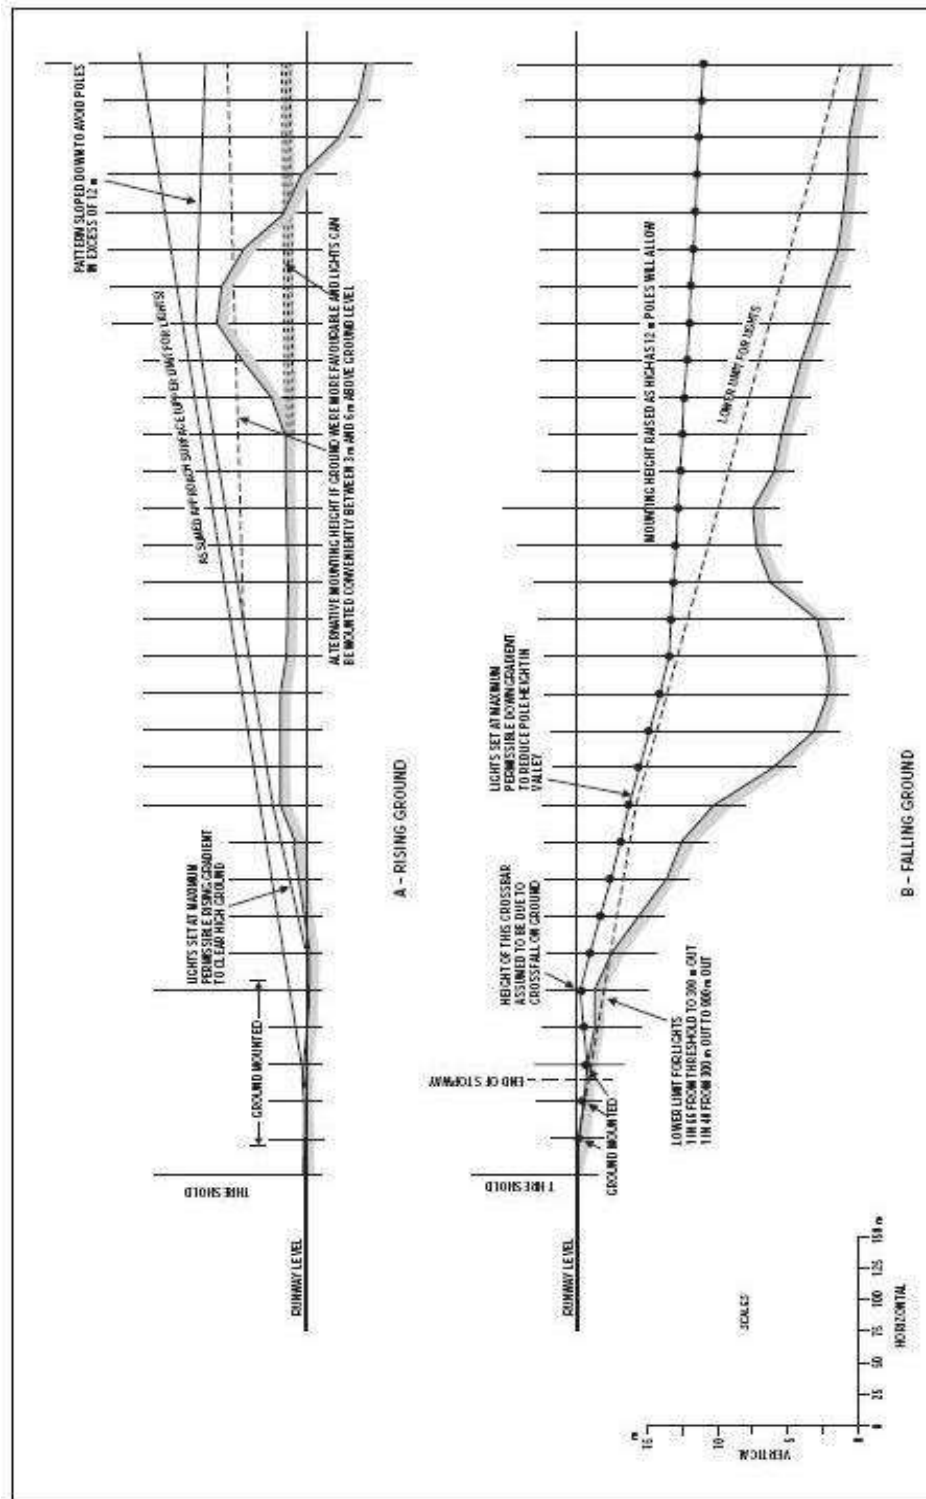


Figure A-9. Vertical installation tolerance

## **12.4 Consideration of the effects of reduced lengths**

12.4.1 . The need for an adequate approach lighting system to support precision approaches where the pilot is required to acquire visual references prior to landing cannot be stressed too strongly. The safety and regularity of such operations is dependent on this visual acquisition. The height above runway threshold at which the pilot decides there are sufficient visual cues to continue the precision approach and land will vary, depending on the type of approach being conducted and other factors such as meteorological conditions, ground and airborne equipment, etc. The required length of approach lighting system which will support all the variations of such approaches is 900 m, and this shall always be provided whenever possible.

12.4.2 However, there are some runway locations where it is impossible to provide the 900 m length of approach lighting system to support precision approaches.

12.4.3 In such cases, every effort shall be made to provide as much approach lighting system as possible. The Public Authority for Civil Aviation may impose restrictions on operations to runways equipped with reduced lengths of lighting. There are many factors which determine at what height the pilot must have decided to continue the approach to land or execute a missed approach. It must be understood that the pilot does not make an instantaneous judgement upon reaching a specified height. The actual decision to continue the approach and landing sequence is an accumulative process which is only concluded at the specified height. Unless lights are available prior to reaching the decision point, the visual assessment process is impaired and the likelihood of missed approaches will increase substantially. There are many operational considerations which must be taken into account by The Public Authority for Civil Aviation in deciding if any restrictions are necessary to any precision approach and these are detailed in Annex 6.

## **13. Priority of installation of visual approach slope indicator systems**

**13.1** It has been found impracticable to develop guidance material that will permit a completely objective analysis to be made of which runway on an aerodrome shall receive first priority for the installation of a visual approach slope indicator system. However, factors that must be considered when making such a decision are:

- a. Frequency of use;
- b. Seriousness of the hazard;
- c. Presence of other visual and non-visual aids;
- d. Type of aeroplanes using the runway; and
- e. Frequency and type of adverse weather conditions under which the runway will be used.

**13.2** With respect to the seriousness of the hazard, the order given in the application specifications for a visual approach slope indicator system, 5.3.5.1 b) to e) of Chapter 5, may be used as a general guide. These may be summarized as:

- a. Inadequate visual guidance because of:
  - Approaches over water or featureless terrain, or absence of sufficient extraneous light in the approach area by night;
  - Deceptive surrounding terrain;
- b. Serious hazard in approach;
- c. Serious hazard if aeroplanes undershoot or overrun; and
- d. Unusual turbulence.

**13.3** The presence of other visual or non-visual aids is a very important factor. Runways equipped with ILS or MLS would generally receive the lowest priority for a visual approach slope indicator system installation. It must be remembered, though, that visual approach slope indicator systems are visual approach aids in their own right and can supplement electronic aids. When serious hazards exist and/or a substantial number of aeroplanes not equipped for ILS or MLS use a runway, priority might be given to installing a visual approach slope indicator on this runway.

**13.4** .Priority shall be given to runways used by turbojet aeroplanes.

#### **14. Lighting of unserviceable areas**

Where a temporarily unserviceable area exists, it may be marked with fixed-red lights. These lights shall mark the most potentially dangerous extremities of the area. A minimum of four such lights shall be used, except where the area is triangular in shape where a minimum of three lights may be employed. The number of lights shall be increased when the area is large or of unusual configuration. At least one light shall be installed for each 7.5 m of peripheral distance of the area. If the lights are directional, they shall be orientated so that as far as possible their beams are aligned in the direction from which aircraft or vehicles will approach. Where aircraft or vehicles will normally approach from several directions, consideration shall be given to adding extra lights or using omnidirectional lights to show the area from these directions. Unserviceable area lights shall be frangible. Their height shall be sufficiently low to preserve clearance for propellers and for engine pods of jet aircraft.

#### **15. Rapid exit taxiway indicator lights**

**15.1** Rapid exit taxiway indicator lights (RETILs) comprise a set of yellow unidirectional lights installed in the runway adjacent to the centre line. The lights are positioned in a 3-2-1 sequence at 100 m intervals prior to the point of tangency of the rapid exit taxiway centre line. They are intended to give an indication to pilots of the location of the next available rapid exit taxiway.

**15.2** In low visibility conditions, RETILs provide useful situational awareness cues while allowing the pilot to concentrate on keeping the aircraft on the runway centre line.

- 15.3** Following a landing, runway occupancy time has a significant effect on achievable runway capacity. RETILs allow pilots to maintain a good roll-out speed until it is necessary to decelerate to an appropriate speed for the turn into a rapid exit turn-off. A roll-out speed of 60 knots until the first RETIL (three-light barrette) is reached is seen as the optimum.

## **16. Intensity control of approach and runway lights**

- 16.1** The conspicuity of a light depends on the impression received of contrast between the light and its background. If a light is to be useful to a pilot by day when on approach, it must have an intensity of at least 2 000 or 3 000 cd, and in the case of approach lights an intensity of the order of 20 000 cd is desirable. In conditions of very bright daylight fog it may not be possible to provide lights of sufficient intensity to be effective. On the other hand, in clear weather on a dark night, an intensity of the order of 100 cd for approach lights and 50 cd for the runway edge lights may be found suitable. Even then, owing to the closer range at which they are viewed, pilots have sometimes complained that the runway edge lights seemed unduly bright.
- 16.2** In fog the amount of light scattered is high. At night this scattered light increases the brightness of the fog over the approach area and runway to the extent that little increase in the visual range of the lights can be obtained by increasing their intensity beyond 2 000 or 3000 cd. In an endeavour to increase the range at which lights would first be sighted at night, their intensity must not be raised to an extent that a pilot might find excessively dazzling at diminished range.
- 16.3** From the foregoing will be evident the importance of adjusting the intensity of the lights of an aerodrome lighting system according to the prevailing conditions, so as to obtain the best results without excessive dazzle that would disconcert the pilot. The appropriate intensity setting on any particular occasion will depend both on the conditions of background brightness and the visibility. Detailed guidance material on selecting intensity setting for different conditions is given in the *Aerodrome Design Manual* (Doc 9157), Part 4.

## **17. Signal area**

A signal area need be provided only when it is intended to use visual ground signals to communicate with aircraft in flight. Such signals may be needed when the aerodrome does not have an aerodrome control tower or an aerodrome flight information service unit, or when the aerodrome is used by aeroplanes not equipped with radio. Visual ground signals may also be useful in the case of failure of two-way radio communication with aircraft. It shall be recognized, however, that the type of information which may be conveyed by visual ground signals shall normally be available in AIPs or NOTAM. The potential need for visual ground signals shall therefore be evaluated before deciding to provide a signal area.

## **18. Rescue and firefighting services**

### **18.1 Administration**

- 18.1.1** The rescue and firefighting service at an aerodrome shall be under the administrative control of the aerodrome management, which shall also be responsible for ensuring that the service provided is organized, equipped, staffed, trained and operated in such a manner as to fulfil its proper functions.

- 
- 18.1.2 In drawing up the detailed plan for the conduct of search and rescue operations in accordance with 4.2.1 with annex 12, the aerodrome management shall coordinate its plans with the relevant rescue coordination centres to ensure that the respective limits of their responsibilities for an aircraft accident within the vicinity of an aerodrome are clearly delineated.
- 18.1.3 Coordination between the rescue and firefighting service at an aerodrome and public protective agencies, such as local fire brigade, police force, coast guard and hospitals, shall be achieved by prior agreement for assistance in dealing with an aircraft accident.
- 18.1.4 A grid map of the aerodrome and its immediate vicinity shall be provided for the use of the aerodrome services concerned. Information concerning topography, access roads and location of water supplies shall be indicated. This map shall be conspicuously posted in the control tower and fire station, and available on the rescue and fire fighting vehicles and such other supporting vehicles required to respond to an aircraft accident or incident. Copies shall also be distributed to public protective agencies as desirable.
- 18.1.5 Coordinated instructions shall be drawn up detailing the responsibilities of all concerned and the action to be taken in dealing with emergencies. The appropriate authority shall ensure that such instructions are promulgated and observed.

## 18.2 Training

The training curriculum shall include initial and recurrent instruction in at least the following areas:

- a. airport familiarization;
- b. aircraft familiarization;
- c. rescue and firefighting personnel safety;
- d. emergency communications systems on the aerodrome, including aircraft fire-related alarms;
- e. use of the fire hoses, nozzles, turrets and other appliances required for compliance with Chapter 9, 9.2;
- f. application of the types of extinguishing agents required for compliance with Chapter 9, 9.2;
- g. emergency aircraft evacuation assistance;
- h. firefighting operations;
- i. adaptation and use of structural rescue and firefighting equipment for aircraft rescue and firefighting;
- j. dangerous goods;
- k. familiarization with fire fighters' duties under the aerodrome emergency plan; and
- l. Protective clothing and respiratory protection.

---

**18.3 Level of protection to be provided**

- 18.3.1 In accordance with Chapter 9, 9.2, aerodromes shall be categorized for rescue and firefighting purposes and the level of protection provided shall be appropriate to the aerodrome category.

**18.4 Rescue equipment for difficult environments**

- 18.4.1 Suitable rescue equipment and services shall be available at an aerodrome where the area to be covered by the service includes water, swampy areas or other difficult environment that cannot be fully served by conventional wheeled vehicles. This is particularly important where a significant portion of approach/departure operations takes place over these areas.
- 18.4.2 The rescue equipment shall be carried on boats or other vehicles such as helicopters and amphibious or air cushion vehicles, capable of operating in the area concerned. The vehicles shall be so located that they can be brought into action quickly to respond to the areas covered by the service.
- 18.4.3 At an aerodrome bordering the water, the boats or other vehicles shall preferably be located on the aerodrome, and convenient launching or docking sites provided. If these vehicles are located off the aerodrome, they shall preferably be under the control of the aerodrome rescue and fire fighting service or, if this is not practicable, under the control of another competent public or private organization working in close coordination with the aerodrome rescue and fire fighting service (such as police, military services, harbour patrol or coast guard).
- 18.4.4 Boats or other vehicles shall have as high a speed as practicable so as to reach an accident site in minimum time. To reduce the possibility of injury during rescue operations, water jet-driven boats are preferred to water propeller-driven boats unless the propellers of the latter boats are ducted. Shall the water areas to be covered by the service be frozen for a significant period of the year, the equipment shall be selected accordingly. Vehicles used in this service shall be equipped with life rafts and life preservers related to the requirements of the larger aircraft normally using the aerodrome, with two-way radio communication, and with floodlights for night operations. If aircraft operations during periods of low visibility are expected, it may be necessary to provide guidance for the responding emergency vehicles.
- 18.4.5 The personnel designated to operate the equipment shall be adequately trained and drilled for rescue services in the appropriate environment.

**18.5 Facilities**

- 18.5.1 The provision of special telephone, two-way radio communication and general alarm systems for the rescue and firefighting service is desirable to ensure the dependable transmission of essential emergency and routine information. Consistent with the individual requirements of each aerodrome, these facilities serve the following purposes:

- 
- a. Direct communication between the activating authority and the aerodrome fire station in order to ensure the prompt alerting and dispatch of rescue and fire fighting vehicles and personnel in the event of an aircraft accident or incident;
  - b. Direct communication between the rescue and firefighting service and the flight crew of an aircraft in emergency;
  - c. Emergency signals to ensure the immediate summoning of designated personnel not on standby duty;
  - d. As necessary, summoning essential related services on or off the aerodrome; and
  - e. Maintaining communication by means of two-way radio with the rescue and fire fighting vehicles in attendance at an aircraft accident or incident.

18.5.2 The availability of ambulance and medical facilities for the removal and after-care of casualties arising from an aircraft accident shall receive the careful consideration of the appropriate authority and shall form part of the overall emergency plan established to deal with such emergencies.

## **19. Operators of vehicles**

**19.1** The authorities responsible for the operation of vehicles on the movement area shall ensure that the operators are properly qualified. This may include, as appropriate to the driver's function, knowledge of:

- a. The geography of the aerodrome;
- b. Aerodrome signs, markings and lights;
- c. Radiotelephone operating procedures;
- d. Terms and phrases used in aerodrome control including the ICAO spelling alphabet;
- e. Rules of air traffic services as they relate to ground operations;
- f. Airport rules and procedures; and
- g. Specialist functions as required, for example, in rescue and firefighting.

**19.2** The operator shall be able to demonstrate competency, as appropriate, in:

- a. The operation or use of vehicle transmit/receive equipment;
- b. Understanding and complying with air traffic control and local procedures;
- c. Vehicle navigation on the aerodrome; and
- d. Special skills required for the particular function.



In addition, as required for any specialist function, the operator shall be the holder of a license and passes issued by the aerodrome operator.

**19.3** The above shall be applied as is appropriate to the function to be performed by the operator, and it is not necessary that all operators be trained to the same level, for example, operators whose functions are restricted to the apron.

**19.4** If special procedures apply for operations in low visibility conditions, it is desirable to verify an operator's knowledge of the procedures through periodic checks.

## **20. The ACN-PCN method of reporting pavement strength**

### **20.1 Overload operations**

20.1.1 Overloading of pavements can result either from loads too large, or from a substantially increased application rate, or both. Loads larger than the defined (design or evaluation) load shorten the design life, whilst smaller loads extend it. With the exception of massive overloading, pavements in their structural behaviour are not subject to a particular limiting load above which they suddenly or catastrophically fail. Behaviour is such that a pavement can sustain a definable load for an expected number of repetitions during its design life. As a result, occasional minor overloading is acceptable, when expedient, with only limited loss in pavement life expectancy and relatively small acceleration of pavement deterioration. For those operations in which magnitude of overload and/or the frequency of use do not justify a detailed analysis, the following criteria are suggested:

- a. for flexible pavements, occasional movements by aircraft with ACN not exceeding 10 per cent above the reported PCN shall not adversely affect the pavement;
- b. for rigid or composite pavements, in which a rigid pavement layer provides a primary element of the structure, occasional movements by aircraft with ACN not exceeding 5 per cent above the reported PCN shall not adversely affect the pavement;
- c. if the pavement structure is unknown, the 5 per cent limitation shall apply; and
- d. the annual number of overload movements shall not exceed approximately 5 per cent of the total annual aircraft movements.

20.1.2 Such overload movements shall not normally be permitted on pavements exhibiting signs of distress or failure. Furthermore, overloading shall be avoided during any periods of thaw following frost penetration, or when the strength of the pavement or its subgrade could be weakened by water. Where overload operations are conducted, the appropriate authority shall review the relevant pavement condition regularly, and shall also review the criteria for overload operations periodically since excessive repetition of overloads can cause severe shortening of pavement life or require major rehabilitation of pavement.

---

## 20.2 ACNs for several aircraft types

For convenience, several aircraft types currently in use have been evaluated on rigid and flexible pavements founded on the four subgrade strength categories in Chapter 2, 2.6.6 b), and the results tabulated in the *Aerodrome Design Manual* (Doc 9157), Part 3.

## 21. Autonomous runway incursion warning system (ARIWS)

**Note 1:** *These autonomous systems are generally quite complex in design and operation and, as such deserve careful consideration by all levels of the industry, from the regulating authority to the end user. This guidance is offered to provide a more clear description of the system(s) and offer some suggested actions required in order to properly implement these system(s) at an aerodrome in any State.*

**Note 2:** *The Manual on the Prevention of Runway Incursion (Doc 9870) presents different approaches for the prevention of runway incursion.*

### 21.1 General description

- 21.1.1 The operation of an ARIWS is based upon a surveillance system which monitors the actual situation on a runway and automatically returns this information to warning lights at the runway (take-off) thresholds and entrances. When an aircraft is departing from a runway (rolling) or arriving at a runway (short final), red warning lights at the entrances will illuminate, indicating that it is unsafe to enter or cross the runway. When an aircraft is aligned on the runway for take-off and another aircraft or vehicle enters or crosses the runway, red warning lights will illuminate at the threshold area, indicating that it is unsafe to start the take-off roll.
- 21.1.2 In general, an ARIWS consists of an independent surveillance system (primary radar, multilateration, specialized cameras, dedicated radar, etc.) and a warning system in the form of extra airfield lighting systems connected through a processor which generates alerts independent from ATC directly to the flight crews and vehicle operators.
- 21.1.3 An ARIWS does not require circuit interleaving, secondary power supply or operational connection to other visual aid systems.
- 21.1.4 In practice, not every entrance or threshold needs to be equipped with warning lights. Each aerodrome will have to assess its needs individually depending on the characteristics of the aerodrome. There are several systems developed offering the same or similar functionality.

### 21.2 Flight crew actions

- 21.2.1 It is of critical importance that flight crews understand the warning being transmitted by the ARIWS system. Warnings are provided in near real-time, directly to the flight crew because there is no time for “relay” types of communications. In other words, a conflict warning generated to ATS which must then interpret the warning, evaluate the situation and communicate to the aircraft in question, would result in several seconds

being taken up where each second is critical in the ability to stop the aircraft safely, and prevent a potential collision. Pilots are presented with a globally consistent signal which means “STOP IMMEDIATELY” and must be taught to react accordingly. Likewise, pilots receiving an ATS clearance to take-off or cross a runway, and seeing the red light array, must STOP and advise ATS that they aborted/stopped because of the red lights. Again, the criticality of the timeline involved is so tight that there is no room for misinterpretation of the signal. It is of utmost importance that the visual signal be consistent around the world.

- 21.2.2 It must also be stressed that the extinguishing of the red lights does not, in itself, indicate a clearance to proceed. That clearance is still required from air traffic control. The absence of red warning lights only means that potential conflicts have not been detected.
- 21.2.3 In the event that a system becomes unserviceable, one of two things will occur. If the system fails in the extinguished condition, then no procedural changes need to be accomplished. The only thing that will happen is the loss of the automatic, independent warning system. Both ATS operations and flight crew procedures (in response to ATS clearances) will remain unchanged.
- 21.2.4 Procedures should be developed to address the circumstance where the system fails in the illuminated condition. It will be up to the ATS and/or aerodrome operator to establish those procedures depending on their own circumstances. It must be remembered that flight crews are instructed to “STOP” at all red lights. If the affected portion of the system, or the entire system is shut off, the situation is reverted to the extinguished scenario described in 21.2.3 above.

### **21.3 Aerodromes**

- 21.3.1 An ARIWS does not have to be provided at all aerodromes. An aerodrome considering the installation of such a system may wish to assess its needs individually, depending on traffic levels, aerodrome geometry, ground taxi patterns, etc. Local user groups such as the Local Runway Safety Team (LRST) can be of assistance in this process. Also, not every runway or taxiway needs to be equipped with the lighting array(s) and not every installation requires a comprehensive ground surveillance system to feed information to the conflict detection computer.
- 21.3.2 Although there may be local specific requirements, some basic system requirements are applicable to all ARIWS:
  - a. the control system and energy power supply of the system must be independent from any other system in use at the aerodrome, especially the other parts of the lighting system;
  - b. the system must operate independently from ATS communications;
  - c. the system must provide a globally accepted visual signal that is consistent and instantly understood by crews; and

- 
- d. Local procedures should be developed in the case of malfunction or failure of a portion of, or the entire system.

## **21.4 Air traffic services**

- 21.4.1 The ARIWS is designed to be complementary to normal ATS functions, providing warnings to flight crews and vehicle operators when some conflict has been unintentionally created or missed during normal aerodrome operations. The ARIWS will provide a direct warning when, for example, ground control or tower (local) control has provided a clearance to hold short of a runway but the flight crew or vehicle operator has “missed” the hold short portion of their clearance and tower has issued a take-off or landing clearance to that same runway, and the non-read back by the flight crew or vehicle operator was missed by air traffic control.
- 21.4.2 In the case where a clearance has been issued and a crew reports a non-compliance due to “red lights”, or aborting because of “red lights”, then it is imperative that the controller assess the situation and provide additional instructions as necessary. It may well be that the system has generated a false warning or that the potential incursion no longer exists; however, it may also be a valid warning. In any case, additional instructions and/or a new clearance need to be provided. In a case where the system has failed, then procedures will need to be put into place as described in 21.2.3 and 21.2.4 above. In no case should the illumination of the ARIWS be dismissed without confirmation that, in fact, there is no conflict. It is worth noting that there have been numerous incidents avoided at aerodromes with such systems installed. It is also worth noting that there have been false warnings as well, usually as a result of the calibration of the warning software, but in any case, a confirmation of the potential conflict existence or non-existence must be done.
- 21.4.3 While many installations may have a visual or audio warning available to ATS personnel, it is in no way intended that ATS personnel be required to actively monitor the system. Such warnings may assist ATS personnel in quickly assessing the conflict in the event of a warning and help them to provide appropriate further instructions, but the ARIWS should not play an active part in the normal functioning of any ATS facility.
- 21.4.4 Each aerodrome where the system is installed will develop procedures depending upon their unique situation. Again, it must be stressed that under no circumstances should pilots or operators be instructed to “cross the red lights”. As indicated previously, the use of local runway safety teams can greatly assist in this development process.

## **21.5 Promulgation of information**

- 21.5.1 Information on the characteristics and status of an ARIWS at an aerodrome are promulgated in the AIP section AD 2.9, in PANS-AIM (Doc 10066) and its status updated as necessary through NOTAM or ATIS in compliance with CAR 139 Part1, 2.9.1.
- 21.5.2 Aircraft operators are to ensure that flight crews documentation include procedures regarding ARIWS and appropriate guidance information, in compliance with Annex 6, Part I.

- 21.5.3 Aerodromes may provide additional sources of guidance on operations and procedures for their personnel, aircraft operators, ATS and third parties personnel who may have to deal with an ARIWS.

## **22. Taxiway design guidance for minimizing the potential for the runway incursions**

- 22.1** Good aerodrome design practices can reduce the potential for runway incursions while maintaining operating efficiency and capacity. The following taxiway design guidance may be considered to be part of a runway incursion prevention programme as a means to ensure that runway incursion aspects are addressed during the design phase for new runways and taxiways. Within this focused guidance, the prime considerations are to limit the number of aircraft or vehicles entering or crossing a runway, provide pilots with enhanced unobstructed views of the entire runway, and correct taxiways identified as hot spots as far as possible.
- 22.2** The centre line of an entrance taxiway should be perpendicular to the runway centre line, where possible. This design principle provides pilots with an unobstructed view of the entire runway, in both directions, to confirm that the runway and approach are clear of conflicting traffic before proceeding towards the runway. Where the taxiway angle is such that a clear unobstructed view, in both directions, is not possible, consideration should be given to providing a perpendicular portion of the taxiway immediately adjacent to the runway to allow for a full visual scan by the pilots prior to entering or crossing a runway.
- 22.3** For taxiways intersecting with runways, avoid designing taxiways wider than requirements in CAR 139. This design principle offers improved recognition of the location of the runway holding position and the accompanying sign, marking, and lighting visual cues.
- 22.4** Existing taxiways wider than recommended in CAR 139, can be rectified by painting taxi side stripe markings to the recommended width. As far as practicable, it is preferable to redesign such locations properly rather than to repaint such locations.
- 22.5** Multi-taxiway entrances to a runway should be parallel to each other and should be distinctly separated by an unpaved area. This design principle allows each runway holding location an earthen area for the proper placement of accompanying sign, marking, and lighting visual cues at each runway holding position. Moreover, the design principle eliminates the needless costs of building unusable pavement and as well as the costs for painting taxiway edge markings to indicate such unusable pavement. In general, excess paved areas at runway holding positions reduce the effectiveness of sign, marking, and lighting visual cues.
- 22.6** Build taxiways that cross a runway as a single straight taxiway. Avoid dividing the taxiway into two after crossing the runway. This design principle avoids constructing “Y-shaped” taxiways known to present risk of runway incursions.
- 22.7** If possible, avoid building taxiways that enter at the mid-runway location. This design principle helps to reduce the collision risks at the most hazardous locations (high energy location) because normally departing aircraft have too much energy to stop, but not enough speed to take-off, before colliding with another errant aircraft or vehicle.
- 22.8** Provide clear separation of pavement between a rapid exit taxiway and other non-rapid taxiways entering or crossing a runway. This design principle avoids two taxiways from

overlapping each other to create an excessive paved area that would confuse pilots entering a runway.

**22.9** Avoid the placement of different pavement materials (asphalt and cement concrete) at or near the vicinity of the runway holding position, as far as practicable. This design principle avoids creating visual confusion as to the actual location of the runway holding position.

**22.10** Perimeter taxiways. Many aerodromes have more than one runway, notably paired parallel runways (two runways on one side of the terminal), which creates a difficult problem in that either on arrival or departure an aircraft is required to cross a runway. Under such a configuration, the safety objective here is to avoid or at least keep to a minimum the number of runway crossings. This safety objective may be achieved by constructing a “perimeter taxiway”. A perimeter taxiway is a taxi route that goes around the end of a runway, enabling arrival aircraft (when landings are on outer runway of a pair) to get to the terminal or departure aircraft (when departures are on outer runway of a pair) to get to the runway without either crossing a runway, or conflicting with a departing or approaching aircraft.

**22.11** A perimeter taxiway would be designed according to the following criteria:

- a) Sufficient space is required between the landing threshold and the taxiway centre line where it crosses under the approach path, to enable the critical taxiing aircraft to pass under the approach without penetrating any approach surface.
- b) The jet blast impact of aircraft taking off should be considered in consultation with aircraft manufacturers; the extent of take-off thrust should be evaluated when determining the location of a perimeter taxiway.
- c) The requirement for a runway end safety area, as well as possible interference with landing systems and other navigation aids should also be taken into account. For example, in the case of an Instrument Landing System, the perimeter taxiway should be located behind the localiser antenna, not between the localiser antenna and the runway, due to the potential for severe Instrument Landing System disturbance, noting that this is harder to achieve as the distance between the localizer and the runway increases.
- d) Human factors issues should also be taken into account. Appropriate measures should be put in place to assist pilots to distinguish between aircraft that are crossing the runway and those that are safely on a perimeter taxiway.

## **23. Aerodrome mapping data**

### **23.1 Introduction**

Chapter 2, 2.1.2 and 2.1.3, contain provisions related to the provision of aerodrome mapping data. The aerodrome mapping data features are collected and made available to the aeronautical information services for aerodromes designated by States with consideration of the intended applications. These applications are closely tied to an identified need and operational use where the application of the data would provide a safety benefit or could be used as mitigation to a safety concern.

---

## 23.2 Applications

23.2.1 Aerodrome mapping data include aerodrome geographic information that support applications which improve the user's situational awareness or supplement surface navigation, thereby increasing safety margins and operational efficiency. With appropriate data element accuracy, these data sets support collaborative decision making, common situational awareness, and aerodrome guidance applications. The data sets are intended to be used in the following air navigation applications:

- a. On-board positioning and route awareness including moving maps with own aircraft position, surface guidance and navigation;
- b. Traffic awareness including surveillance and runway incursion detection and alerting (such as respectively in A-SMGCS levels 1 and 2);
- c. Ground positioning and route awareness including situational displays with aircraft and vehicles position and taxi route, surface guidance and navigation (such as A-SMGCS levels 3 and 4);
- d. Facilitation of aerodrome-related aeronautical information, including NOTAMs;
- e. Resource and aerodrome facility management; and
- f. Aeronautical chart production.

23.2.2 The data may also be used in other applications such as training / flight simulators and on-board or ground enhanced vision systems (EVS), synthetic vision systems (SVS) and combined vision systems (CVS).

23.2.3 Determination of aerodromes to be considered for collection of aerodrome mapping data features

23.2.4 In order to determine which aerodromes may make use of applications requiring the collection of aerodrome mapping data features, the following aerodrome characteristics may be considered:

- safety risks at the aerodrome ;
- visibility conditions ;
- aerodrome layout ; and
- traffic density.

**Note:** Further guidance on aerodrome mapping data can be found in Doc 9137, Airport Services Manual, Part 8 — Airport Operational Service.

ATTACHMENT B. OBSTACLE LIMITATION SURFACES

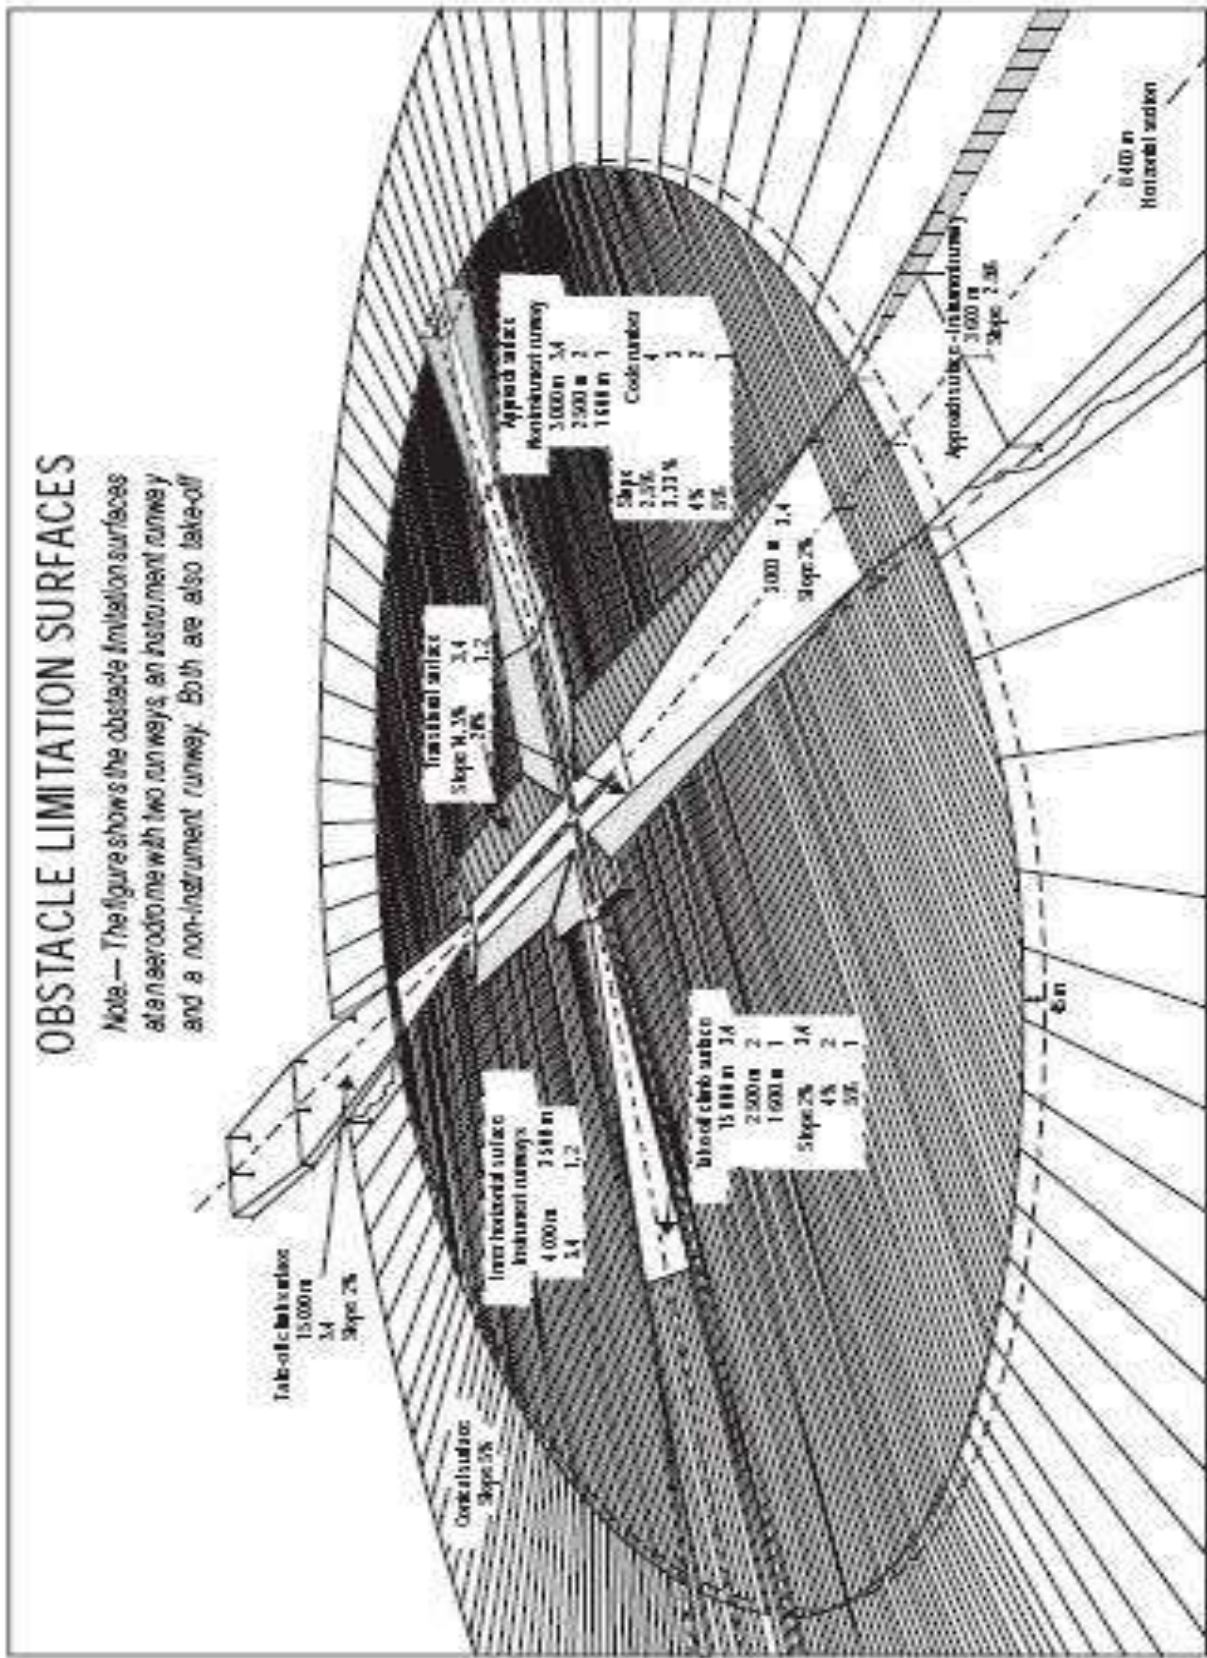


Figure B-1



## ATTACHMENT C. APPLICATION FOR AERODROME CERTIFICATE



## Application for Aerodrome Certificate under Oman CAR 139

## 1. Applicant/Aerodrome Details

(a)	Legal name of Applicant/Organisation					
		The certificate will be issued in this name				
(b)	Name of aerodrome					
(d)	Trading name: (if any)					
(c)	Client No: (if known)					
(e)	Address for Service:					
Civil Aviation Law, requires applicants to provide an address for service (i.e. a physical address) and to notify DGCAR of any changes						
Tel:		Fax:		Email:		
(f)	Postal Address:					
(if different from Address for Service)						
Tel:		Fax:		Email:		
(g)	Your reference:					
		(Order number/contact person or other reference)				

## 2. Reason for Application – Mark appropriate box(s)

Initial issue:	<input type="checkbox"/>	Renewal	<input type="checkbox"/>
----------------	--------------------------	---------	--------------------------

## 3. Indicate the largest Type of Aircraft Expected to use the Aerodrome


## 4. Details to be Shown on the Aerodrome Certificate

Aerodrome Name:
Aerodrome Operator:

<b>6.</b>	<b>Senior Persons</b>
List the name of the Accountable Manager and the nominated post holders	

<b>7.</b>	<b>Declaration</b>
<p>This application is made for and on behalf of the applicant or organisation identified above. I certify that I am empowered by the applicant or organisation to ensure that all activities undertaken by the applicant or organisation can be financed and carried out in accordance with the standard required by DGCAR.</p> <p>Full name of (proposed) Chief Executive: .....</p> <p>Signature of Chief Executive: .....</p> <p>Date of application: ... Client No. (if known).....</p> <p><b>Notes:</b></p> <p><i>The provision of false information or failure to disclose information relevant to the grant or holding of an aviation document constitutes an offence under the Civil Aviation Act and is subject, in the case of a person other than the individual, to a fine.</i></p> <p>The completed application, together with the appropriate supporting Aerodrome Certification manuals, should be submitted to:</p> <p style="margin-left: 40px;">Directorate General Civil Aviation Regulations P.O.Box 1 Muscat Postal Code 111 Sultanate of Oman</p> <p><b>OFFICE USE ONLY</b></p> <p>1. Received by: ..... 2. Date Received:..... 3. Job No:.....</p> <p>4. Completed by: ..... 5. Certificate issue date: .....</p>	

## ATTACHMENT D. CAR139 AERODROME CERTIFICATION COMPLIANCE CHECKLIST

Aerodrome Manual								
No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1.	12.1.2	<b>PART 1- General Information</b>						
2.	12.1.1 (a)	Contents and/or index						
3.	12.1.1 (b)	Amendment record page						
4.	12.1.1 (c)	Amendment procedure						
5.	12.1.1 (d)	Indication of changes on amended pages						
6.	12.1.1 (e)	Abbreviations, glossary						
7.	12.1.1 (f)	Checklist of pages						
8.	12.1.1 (g)	Bibliography/Reference						
9.	12.1.1 (h)	Distribution list						
10.	12.1.2 (a)	Purpose and scope of the aerodrome manual						
11.	12.1.2 (b)	The legal requirement for an aerodrome certificate and an aerodrome manual as prescribed in the national regulations						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
12.	12.1.2 (c)	Conditions for use of the aerodrome – a statement to indicate that the aerodrome shall at all times, when it is available for the take-off and landing of aircraft, be so available to all persons on equal terms and conditions						
13.	12.1.2 (d)	The available aeronautical information system and procedures for its promulgation						
14.	12.1.2 (e)	The system for recording aircraft movement						
15.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Compliance with standards and practices and conditions of the aerodrome certificate						
16.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Allow access of PACA and PACA Inspectors						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
17.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Review of aeronautical publications						
18.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Notify PACA of any aerodrome facilities or level of service						
19.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Inspect the aerodrome after an aviation occurrence or when likely hazardous operations may exist						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
20.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Notify AIS, PACA and Air traffic control of any object, hazardous condition, level of service or remove from the aerodrome surface any hazardous obstruction						
21.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: remove from the aerodrome surface any vehicle or other obstruction that is likely to be hazardous to aviation safety						
22.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Maintain sufficient qualified and competent personnel to comply with CAR139						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
23.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Ensure PACA approves all personnel involved with aerodrome safety functions						
24.	12.1.2 (f)	Acknowledge by the aerodrome operator of their obligations and systems as specified in 11.17 covering: Post notices of hazards on any road, path or sidewalk						
25.	12.2	<b>PART 2: Particulars of the aerodrome site</b>						
26.	12.2.1 (a)	A plan of the aerodrome showing the main aerodrome facilities for the operation of the aerodrome including, particularly, the location of each wind direction indicator						
27.	12.2.1 (b)	A plan of the aerodrome showing the aerodrome boundaries						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
28.	12.2.1 (c)	A plan showing the distance of the aerodrome from the nearest city, town or other populous area, and the location of any aerodrome facilities and equipment outside the boundaries of the aerodrome						
29.	12.2.1 (d)	Particulars of the title of the aerodrome site. If the boundaries of the aerodrome are not defined in the title documents particulars of the title to, or interest in, the property on which the aerodrome is located and a plan showing the boundaries and position of the aerodrome						
30.	12.3	<b>PART 3: Information reporting</b>						
31.	12.3.1	General Information						
32.	12.3.1(a)	The name of the aerodrome						
33.	12.3.1(b)	The location of the aerodrome						
34.	12.3.1(c)	The geographical coordinates of the aerodrome Reference point determined in terms of the WGS-84 Reference datum						
35.	12.3.1(d)	The aerodrome elevation						
36.	12.3.1(e)	The aerodrome geoid undulation						



No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
37.	12.3.1(f)	The elevation of each threshold						
38.	12.3.1(g)	Each threshold geoid undulation						
39.	12.3.1(h)	Elevation of the runway end						
40.	12.3.1(i)	Elevation of any significant high and low points along the runway						
41.	12.3.1(j)	Elevation of the highest elevation of the touchdown zone of a precision approach runway						
42.	12.3.1(k)	The aerodrome Reference temperature						
43.	12.3.1(L)	Details of the aerodrome beacon, or justification if none provided						
44.	12.3.1(m)	The name of the aerodrome operator						
45.	12.3.1(n)	The address and telephone numbers at which the aerodrome operator may be contacted at all times						
46.	12.3.2	Aerodrome dimensions and related information						
47.	12.3.2 (1)	Runway — true bearing,						
48.	12.3.2 (2)	Runway —designation numbers						
49.	12.3.2 (3)	Runway —length, & width to the nearest metre						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
50.	12.3.2 (4)	Runway —displaced threshold(s) location to the nearest metre						
51.	12.3.2 (5)	Runway —slope						
52.	12.3.2 (6)	Runway —surface type(s)						
53.	12.3.2 (7)	Runway —type of runway						
54.	12.3.2 (8)	Runway —for a precision approach runway, the existence of an obstacle free zone						
55.	12.3.2 (9)	Length, width of runway strip to the nearest metre						
56.	12.3.2 (10)	Surface type of runway strip						
57.	12.3.2 (11)	Length, width of runway end safety areas to the nearest metre						
58.	12.3.2 (12)	Surface type of runway end safety areas						
59.	12.3.2 (13)	Length, width of stopways to the nearest metre						
60.	12.3.2 (14)	Surface type of stopways						
61.	12.3.2 (15)	Length, width of taxiways to the nearest metre						
62.	12.3.2 (16)	Surface type of taxiways						
63.	12.3.2 (17)	Apron surface type						
64.	12.3.2 (18)	Apron aircraft stands						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
65.	12.3.2 (19)	Clearway length to the nearest metre						
66.	12.3.2 (20)	Clearway ground profile						
67.	12.3.2 (21)	Visual aids for approach procedures, viz. approach lighting type						
68.	12.3.2 (22)	Visual aids for approach procedures, viz. visual approach slope indicator system (PAPI/APAPI)						
69.	12.3.2 (23)	Obstacle limitation surfaces						
70.	12.3.2 (24)	Marking of runways						
71.	12.3.2 (25)	Lighting of runways						
72.	12.3.2 (26)	Marking of taxiways						
73.	12.3.2 (27)	Lighting of taxiways						
74.	12.3.2 (28)	Marking of aprons						
75.	12.3.2 (29)	Lighting of aprons						
76.	12.3.2 (30)	Other visual guidance and control aids on taxiways (including runway holding positions, intermediate holding positions and stop bars)						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
77.	12.3.2 (31)	Other visual guidance and control aids on aprons, location & type of visual docking guidance system;						
78.	12.3.2 (32)	Availability of standby power for lighting						
79.	12.3.2 (33)	The location and radio frequency of VOR Aerodrome checkpoints						
80.	12.3.2 (34)	The location and designation of standard taxi routes						
81.	12.3.2 (35)	The geographical coordinates of each threshold						
82.	12.3.2 (36)	The geographical coordinates of appropriate taxiway centre line points						
83.	12.3.2 (37)	The geographical INS checkpoint coordinates of each aircraft stand						
84.	12.3.2 (38)	The geographical coordinates & top elevation of significant obstacles in the approach & take-off areas, in the circling area & in the vicinity of the aerodrome. (may best be shown in the form of charts such as specified in Annexes 4 and 15)						
85.	12.3.2 (39)	Pavement surface type						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
86.	12.3.2 (40)	Pavement Classification Number: runway						
87.	12.3.2 (41)	Pavement Classification Number: taxiway						
88.	12.3.2 (42)	Pavement Classification Number: apron						
89.	12.3.2 (43)	One or more pre-flight altimeter check locations established on an apron, and runway holding position (if required for RNP), and their elevation to the nearest foot						
90.	12.3.2 (44)	Declared distances: take-off run available (TORA), take-off distance available (TODA), accelerate-stop distance available (ASDA), landing distance available (LDA)						
91.	12.4	<b>Part 4: Aerodrome Procedures &amp; Safety Measures</b>						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
92.	12.4.1	Aerodrome reporting Particulars of the procedures form reporting any changes to aerodrome information set out in the AIP and procedures for requesting the issue of NOTAMS, including the following:						
93.	12.4.1 (a)	Arrangements for reporting any changes to AIS/PACA and recording the reporting of changes during and outside the normal hours of aerodrome operations						
94.	12.4.1 (b)	The names and roles of persons responsible for notifying the changes, and their telephone numbers during and outside the normal hours of aerodrome operations						
95.	12.4.1 (c)	The address and telephone numbers, as provided by the AIS, & PACA of the place where changes are to be reported to the AIS/PACA						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
96.	12.4.2	Access to the Aerodrome movement area: Particulars of the procedures that have been developed and are to be followed in coordination with the agency responsible for preventing unlawful interference in Civil Aviation at the aerodrome and for preventing unauthorised entry of persons, vehicles, equipment, animals and other things into the movement area including the following:						
97.	12.4.2 (a)	The role of the aerodrome operator, the aircraft operator, aerodrome fixed-base operators, the aerodrome security entity, the ATS provider PACA and other government departments as applicable						
98.	12.4.2 (b)	The names and roles of the personnel responsible for controlling access to the aerodrome, and the telephone numbers for contacting them during and after working hours						
99.	12.4.3	Aerodrome Emergency Plan: Particulars to be included in the aerodrome emergency plan including:						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
100.	12.4.3 (1)	Doc 9137, pt 7, Airport Services Manual, Airport Emergency Planning: Plans for dealing with emergencies occurring at the aerodrome or in its vicinity, including						
101.	12.4.3 (2)	Contents and/or index for separate AEP						
102.	12.4.3 (3)	Amendment record page for separate AEP						
103.	12.4.3 (4)	Amendment procedure for separate AEP						
104.	12.4.3 (5)	Abbreviations, glossary for separate AEP						
105.	12.4.3 (6)	Checklist of pages for separate AEP						
106.	12.4.3 (7)	Bibliography/Reference for separate AEP						
107.	12.4.3 (8)	Distribution list for separate AEP						
108.	12.4.3 (9)	Aerodrome emergency committee						
109.	12.4.3 (10)	Agencies familiarity with other agencies' duties						
110.	12.4.3 (11)	Mutual aid agreements with the surrounding community						
111.	12.4.3 (12)	Aircraft accident on airport						
112.	12.4.3 (13)	Aircraft accident off airport – on land						



No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
113.	12.4.3 (14)	Aircraft accident off airport – on water						
114.	12.4.3 (15)	Aircraft Incident aircraft in flight – severe turbulence						
115.	12.4.3 (16)	Aircraft Incident aircraft in flight – decompression						
116.	12.4.3 (17)	Aircraft Incident aircraft in flight – structural failure						
117.	12.4.3 (18)	Aircraft Incident aircraft on the ground						
118.	12.4.3 (19)	Aircraft Incident - sabotage, bomb threat						
119.	12.4.3 (20)	Aircraft Incident – unlawful seizure						
120.	12.4.3 (21)	Aircraft public health						
121.	12.4.3 (22)	Non aircraft fire – structural						
122.	12.4.3 (23)	Natural disaster						
123.	12.4.3 (24)	Dangerous goods						
124.	12.4.3 (25)	Medical emergencies						
125.	12.4.3 (26)	Non aircraft public health						
126.	12.4.3 (27)	Compound emergency: aircraft/structure						
127.	12.4.3 (28)	Compound emergency: aircraft/fueling facilities						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
128.	12.4.3 (29)	Compound emergency: aircraft/aircraft						
129.	12.4.3 (30)	Classification of emergencies: aircraft accident						
130.	12.4.3 (31)	Classification of emergencies: full emergency						
131.	12.4.3 (32)	Classification of emergencies: local standby						
132.	12.4.3 (33)	Precautions for weather induced physical problems: victims						
133.	12.4.3 (34)	Precautions for weather induced physical problems: emergency personnel						
134.	12.4.3 (35) & 9.1.9	Command, communication & coordination functions for execution of the plan:						
135.	12.4.3 (36) & 9.1.5	A list of organizations, agencies and persons of PACA, both on- and off- airport, for site roles, their telephone and facsimile numbers, e-mail and SITA addresses and the radio frequencies of their offices						
136.	12.4.3 (37)	Incidents on the airport covering "during the emergency" considerations, e.g. agency responsible depending on location, developing phases (investigation – accident/criminal); advance notification of all agencies ‘ roles, responsibilities, and reporting structure						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
137.	12.4.3 (38)	Incidents on the airport covering "after the emergency" considerations; e.g. transition of PACA, legal factors, restoration of services, public protection						
138.	12.4.3 (39) & 9.1.7	Emergency operations centre						
139.	12.4.3 (40) & 9.1.8	Mobile command post						
140.	12.4.3 (41) & 9.1.8 (e)	The appointment of an on-scene commander for the overall emergency operation.						
141.	12.4.3 (42)	Triage principles planned						
142.	12.4.3 (43) & 9.1.5 (e)	Grid map of the aerodrome and its immediate vicinity						
143.	12.4.3 (44)	Care of fatalities						
144.	12.4.3 (45) & 9.1.9	Means of communication with both on aerodrome and external emergency and support services						
145.	12.4.3 (46)	Procedures for preservation of evidence for accident investigation, after immediate actions for preservation of life are completed						
146.	12.4.3 (47) & Att A 18.5.1	Means of communication flight crew, e.g. 121.6						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
147.	12.4.3 (48)	Procedures for dealing with hazardous materials, including cargo and man-made mineral fibres in aircraft construction						
148.	12.4.3 (49)	Procedures for debriefing and record keeping after every incident						
149.	12.4.3 (50) & 9.1.4	Coordination with rescue coordination centre						
150.	12.4.3 (51) & 9.1.6	Human factors principles to ensure optimum response						
151.	12.4.4 (a)	Rescue and Fire-Fighting Particulars of the facilities, equipment, personnel and procedures, for meeting the rescue and fire-fighting requirements including the level of protection provided, expressed in terms of the category of the rescue and fire-fighting services, which shall be in accordance with the longest aeroplane normally using the aerodrome and the type and amounts of extinguishing agents normally available at the aerodrome						
152.	12.4.4 (b)	RFFS policy						
153.	12.4.4 (c)	The names and roles of the persons responsible for dealing with the rescue and fire-fighting services at the aerodrome.						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
154.	12.4.4 (d)	Procedures for assessing the RFF category, including vehicles, media, complimentary media, equipment and manpower						
155.	12.4.4 (e)	Details of RFFS vehicles and equipment, and policy in the event of equipment failure						
156.	12.4.4 (f)	Procedures for RFFS medical and physical fitness, and competence training and assessment						
157.	12.4.4 (g)	Details of tests for aerodrome facilities and equipment to be used in emergencies, including the frequency of those tests						
158.	12.4.4 (h) & 9.1.10 & 9.1.11(a)	Details of exercises to test emergency plans, including the frequency of those exercises: : full scale emergency exercise, not exceeding 2 year interval						
159.	12.4.4 (i) & 9.1.11(b)	Details of exercises to test emergency plans, including the frequency of those exercises: partial emergency exercises in intervening year						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
160.	12.4.4 (j) & 9.1.11(c)	Details of exercises to test emergency plans, including A series of modular test						
161.	12.4.4 (k)	Rescue and fire-fighting: the level of protection provided, expressed in terms of the category of the rescue and fire- fighting services, which shall be in accordance with the longest aeroplane normally using the aerodrome						
162.	12.4.4 (L)	Rescue and fire-fighting: the type and amounts of extinguishing agents normally available at the aerodrome						
163.	12.4.5	Inspection of the Aerodrome Movement Area and Obstacle Limitation Surface by the Aerodrome Operator. Particulars of the procedures for the						
164.	12.4.5 (a)	Arrangements for carrying out inspections, including runway friction and water-depth measurements on runways and taxiways, during and outside the normal hours of aerodrome operations.						
165.	12.4.5 (b)	Arrangements and means of communicating with air traffic control during an inspection.						
166.	12.4.5 (c)	Arrangements for keeping an inspection logbook and the location of the logbook						
167.	12.4.5 (d)	Details of inspection intervals and times						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
168.	12.4.5	Inspection checklist						
169.	12.4.5	Arrangements for reporting the results of inspections and for taking prompt follow-up actions to ensure correction of unsafe conditions.						
170.	12.4.5	The names and roles of persons responsible for carrying out inspections and their telephone numbers during and after working hours.						
171.	2.6.7	Criteria for the use of a pavement by an aircraft with an ACN higher than the PCN of that pavement						
172.	12.4.6	Visual Aids and aerodrome electrical Systems Particulars of the procedures for the inspection and maintenance of aeronautical lights (including obstacle lighting), signs, markers, and aerodrome electrical systems, including the following:						
173.	12.4.6 (a)	Arrangements for carrying out inspections during and outside the normal hours of aerodrome operation, and the checklist for such inspections						
174.	12.4.6 (b)	Arrangements for recording the result of inspections and for taking follow-up action to correct deficiencies						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
175.	12.4.6 (c)	Arrangements for carrying out routine maintenance and emergency maintenance						
176.	12.4.6 (d)	Arrangements for secondary power supplies, if any, and, if applicable, the particulars of any other method of dealing with partial or total system failure						
177.	12.4.6 (e)	The names, roles and contact details of the person responsible for the inspection and maintenance of lighting						
	12.4.6 (f)	The performance level objectives of the maintenance programme for different types of lighting						
178.	12.4.7	Maintenance of the movement area Particulars of the facilities and procedures for the maintenance of the movement area including:						
179.	12.4.7 (a)	Arrangements for maintaining the paved areas						
180.	12.4.7 (b)	Arrangements for maintaining the unpaved runways and taxi ways						
181.	12.4.7 (c)	Arrangements for maintaining the runway and taxi way strips						



No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
182.	12.4.7 (d)	Arrangements for the maintenance of aerodrome drainage						
183.	12.4.8	Aerodrome Works – safety Particulars of the procedures for planning and carrying out construction and maintenance work safety( including work that may have been carried out at short notice) on or in the vicinity of the movement area which may extend above an obstacle limitation surface, including the following:						
184.	12.4.8 (a)	Arrangements for communicating with air traffic control during the progress of such work						
185.	12.4.8 (b)	The names, telephone numbers and roles of the persons and organizations responsible for planning and carrying out the work, and arrangements for contacting those persons and organizations at all times						
186.	12.4.8 (c)	The names and telephone numbers, during and after working hours, of the aerodrome fixed-base operators, ground handling agents and aircraft operators who are to be notified of the work						
187.	12.4.8 (d)	A distribution list for work plans, if required						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
188.	12.4.9	Apron Management Particulars on the apron management procedures, including the following:						
189.	12.4.9 (a)	Arrangements between air traffic control and the apron management unit						
190.	12.4.9 (b)	Arrangements for allocating aircraft parking positions						
191.	12.4.9 (c)	Arrangements for initiating engine start						
192.	12.4.9 (d)	Arrangements for ensuring clearance of aircraft push-back						
193.	12.4.9 (e)	Arrangements for engine test						
194.	12.4.9 (f)	Marshalling service						
195.	12.4.9 (g)	Leader/follow me service						
196.	12.4.9 (h)	Protection from jet blasts						
197.	12.4.9 (i)	Enforcement of safety precautions during aircraft Reference fueling operations						
198.	12.4.9 (j)	Apron sweeping						
199.	12.4.9 (k)	Apron cleaning						
200.	12.4.9 (l)	Arrangements for reporting incidents and accidents on an apron						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
201.	12.4.9 (m)	Arrangements for auditing the safety compliance of all personnel working on the apron						
202.	12.4.10	Airside vehicle control Particulars of the procedures for the control of surface vehicles on or in the vicinity of the movement area, including the following:						
203.	12.4.10 (a)	Details of the applicable traffic rules (including speed limits and the means of enforcing the rules)						
204.	12.4.10 (b)	The method of issuing driving permits for operating vehicles in the movement area						
205.	12.4.10 (c)	The method of issuing vehicle permits for vehicles in the movement area						
206.	12.4.11	Wildlife Hazard Management: Particulars of the procedures to deal with the danger posed to aircraft operations by the presence of birds or mammals in the aerodrome flight pattern or movement area, including the following:						
207.	12.4.11 (a)	Arrangements for assessing wildlife hazards						
208.	12.4.11 (b)	Arrangements for implementing wildlife control programmes						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
209.	12.4.11 (c)	The names and roles of the persons responsible for dealing with wildlife hazards, and their telephone numbers during and after working hours.						
210.	12.4.12	Obstacle control: Particulars setting out the procedures for:						
211.	12.4.12 (a)	Monitoring the obstacle limitation surfaces and Type A Chart for obstacles in the take-off surface						
212.	12.4.12 (b)	Controlling obstacles within the PACA of the operator						
213.	12.4.12 (c)	Monitoring the height of buildings or structures within the boundaries of the obstacle limitation surfaces						
214.	12.4.12 (d)	Controlling new developments in the vicinity of aerodromes						
215.	12.4.12 (e)	Notifying the AIS & PACA of the nature and location of obstacles and any subsequent addition or removal of obstacles for action as necessary, including amendment of the AIP publications						
216.	12.4.13	Removal of Disabled Aircraft Particulars of the procedures for removing a disabled aircraft on or adjacent to the movement area, including the following:						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
217.	12.4.13 (a)	The roles of the aerodrome operator and the holder of the aircraft certificate of registration						
218.	12.4.13 (b)	Arrangements for notifying the holder of the certificate of registration						
219.	12.4.13 (c)	Arrangements for liaising with the air traffic control unit						
220.	12.4.13 (d)	Arrangements for obtaining equipment and personnel to remove the disabled aircraft						
221.	12.4.13 (e)	The names, role and telephone numbers of persons responsible for arranging for the removal of disabled aircraft						
222.	12.4.13 (f, g & h)	Disabled aircraft removal plan: the telephone/telex/ facsimile numbers and e-mail address of the aerodrome coordinator for the removal of a disabled aircraft on or adjacent to the movement area, information on the capability to remove a disabled aircraft, expressed in terms of the largest type of aircraft which the aerodrome is equipped to remove						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
223.	12.4.15 (c)	The names and telephone numbers, during and after working hours, of the persons responsible for measuring the runway visual range						
224.	12.4.16	Protection of sites for aeronautical communication, radar and Navigational aids Particulars of the procedures for the protection of sites for radar and navigational aids located on the aerodrome to ensure that their performance will not be degraded, including the following:						
225.	12.4.16 (a)	Arrangements for the control of activities in the vicinity of radar and navaids installations;						
226.	12.4.16 (b)	Arrangements for ground maintenance in the vicinity of these installations						
227.	12.4.16 (c)	Arrangements for the supply and installation of signs warning of hazardous microwave radiation						
228.	<b>12.5</b>	<b>PART 5: Aerodrome Administration</b>						
229.	12.5	Aerodrome administration						
230.	12.5.1 (a)	An aerodrome organizational chart showing the names and positions of key personnel, including their responsibilities.						
231.	12.5.1 (b)	The name, position and telephone number of the person who has overall responsibility for aerodrome safety.						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
232.	12.5.1 (c)	Airport committees, including						
233.	12.5.1 (c-1)	The establishment of an aerodrome emergency committee to organize training and other preparations for dealing with emergencies						
234.	12.5.1 (c-2)	The establishment of a safety committee						
235.	12.5.1 (c-3)	The establishment of a runway safety team						
236.	12.6	Safety Management Systems Particulars of the aerodrome administration, including the following:						
237.	12.6 (a)	The safety policy, insofar as applicable, on the safety management process and its relation to the operational and maintenance process						
238.	12.6 (b)	The structure or organization of the SMS, including staffing and the assignment of individual and group responsibilities for safety issues						

No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
239.	12.6 (c)	Risk management process including setting safety performance targets, allocating priorities for implementing safety initiatives and providing a framework for controlling the risks to as low a level as is reasonably practicable keeping always in view the requirements of CAR139 part 1 & 2						
240.	12.6 (d)	System for hazard reporting, analysis, investigation, actions and handling of accidents, incidents, complaints, defects, faults, discrepancies, and monitoring of investigation actions.						
241.	12.6 (e)	staff training and competency, including the review and evaluation of the adequacy of training provided to staff on safety-related duties and of the certification system for testing their competency						
242.	12.6 (f)	The procedures for consultation with airport stakeholders including employees, sub-contractors, suppliers of goods, lessees, clients and visitors. The incorporation and enforcement of safety-related clauses in the contracts for construction work at the aerodrome.						



No.	CAR 139 Ref.	TOPIC	Manual Reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
243.	12.6 (g)	The internal safety audit and review system detailing the systems and programmes for undertaking regular monitoring and review of the safety management system						
244.	12.6 (h)	The development of an SMS manual that includes details of the safety management procedures employed including the reliable recording systems for all safety management system records.						
245.	12.6 (i)	Identifying number of any exemption given by PACA						
246.	12.6 (j)	Maintain currency and accuracy of the aerodrome manual						
247.	12.6 (k)	Notify changes of the aerodrome manual to PACA						

### CAR 139 Part 1 Compliance Checklist

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
248.	<b>2.1</b>	<b>CHAPTER 2: Aerodrome data</b>						
249.	2.1	Aerodrome Location Indicator and Name						
250.	2.2.1	Aerodrome Reference point (DDMMSS) and its site						
251.	2.2.2	Direction and distance of aerodrome Reference point from centre of the city or town which the aerodrome service;						
252.	2.2.3	Aerodrome elevation to the nearest foot, and Reference temperature;						
253.	2.2.4	Geoid undulation at the aerodrome elevation position to the nearest foot;						
254.	2.2.5	Magnetic variation to the nearest degree, date of information and annual change;						
255.	2.2.6	Name of aerodrome operator, address, telephone, telefax, AFS address, website address						
256.	2.2.7	Types of traffic permitted to use the aerodrome (IFR/VFR)						
257.	2.2.8	Remarks						
258.	2.3	Operational Hours						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
259.	2.3.1	Aerodrome administration (aerodrome						
260.	2.3.2	Customs and immigration						
261.	2.3.3	Health and sanitation						
262.	2.3.4	AIS briefing office						
263.	2.3.5	ATS reporting office (ARO)						
264.	2.3.6	MET briefing office						
265.	2.3.7	Air traffic service						
266.	2.3.8	Fueling						
267.	2.3.9	Handling						
268.	2.3.10	Security						
269.	2.3.11	De-icing						
270.	2.3.12	Remarks						
271.	2.4	Handling services and facilities						
272.	2.4.1	Cargo-handling facilities						
273.	2.4.2	Fuel and oil types						
274.	2.4.3	Fueling facilities and capacity						
275.	2.4.4	De-icing facilities						
276.	2.4.5	Hangar space for visiting aircraft						
277.	2.4.6	Repair facilities for visiting aircraft;						
278.	2.4.7	Remarks						
279.	2.5	Passenger Facilities						
280.	2.5.1	Hotel(s) at or in the vicinity of aerodrome						
281.	2.5.2	Restaurant(s) at or in the vicinity of						
282.	2.5.3	Transportation possibilities						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
283.	2.5.4	Medical facilities						
284.	2.5.5	Bank and post office at or in the vicinity of aerodrome						
285.	2.5.6	Tourist office						
286.	2.5.7	Remarks						
287.	2.6	Rescue and Fire Fighting services Detailed description of the rescue and firefighting services and equipment available at the aerodrome						
288.	2.6.1	Aerodrome category for fire fighting						
289.	2.6.2	Rescue equipment						
290.	2.6.3	Capability for removal of disabled aircraft; and						
291.	2.6.4	Remarks						
292.	2.7	Seasonal Availability						
293.	2.7.1	Type(s) of clearing equipment						
294.	2.7.2	Clearance priorities						
295.	2.7.3	Remarks						
296.	2.8	Aprons, Taxiways and Check Locations Data						
297.	2.8.1	Surface of aprons						
298.	2.8.1	Strength of aprons pavement (PCN and associated data) if less than 5700kg state max mass & max tire pressure						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
299.	2.8.2	Width of taxiways						
300.	2.8.2	Surface of taxiways						
301.	2.8.2	Pavement strength (PCN and associated data) of taxiways						
302.	2.8.3	Location and elevation to the nearest foot of altimeter checkpoints						
303.	2.8.4	Location of VOR checkpoints						
304.	2.8.5	Position of INS checkpoints in degrees, minutes, seconds and hundredths of seconds						
305.	2.8.6	Remarks						
306.	2.8 note	If check locations/positions are presented on an aerodrome chart, a note to that effect must be provided under this subsection.						
307.	2.9	Surface movement guidance and control system and markings						
308.	2.9.1	Use of aircraft stand identification signs, taxiway guide lines and visual docking/parking guidance system at aircraft stands						
309.	2.9.2	Runway and taxiway markings and lights						
310.	2.9.3	Stop bars (if any)						
311.	2.9.4	Remarks						
312.	2.10	Aerodrome Obstacles: Area 2						
313.	2.10.1 a	Obstacle identification or designation						
314.	2.10.1 b	Type of obstacle						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
315.	2.10.1.c	Obstacle position, represented by geographical coordinates in degrees, minutes, seconds and tenths of seconds						
316.	2.10.1 d	Obstacle elevation and height to the nearest foot						
317.	2.10.1 e	Obstacle marking, and type and colour of obstacle lighting (if any);						
318.	2.10.1 f	If appropriate, an indication that the list of obstacles is available in electronic form, and a Reference to GEN 3.1.6						
319.	2.10.1 g	NIL indication, if appropriate						
320.	2.10.2	Absence of an Area 2 data set, if applicable						
321.	2.10.2 a	In the absence of an Area 2 data set: obstacles that penetrate the obstacle limitation surfaces						
322.	2.10.2 b	In the absence of an Area 2 data set: obstacles that penetrate the take-off flight path area obstacle identification surface						
323.	2.10.2 c	In the absence of an Area 2 data set: other obstacles assessed as being hazardous to air navigation						
324.	2.10.3	Aerodrome Obstacles: Area 3						
325.	2.10.3	Obstacle identification or designation						
326.	2.10.3	Type of obstacle						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
327.	2.10.3	Obstacle position, represented by geographical coordinates in degrees, minutes, seconds and tenths of seconds						
328.	2.10.3	Obstacle elevation and height to the nearest foot						
329.	2.10.3	Obstacle marking, and type and colour of obstacle lighting (if any);						
330.	2.10.3	If appropriate, an indication that the list of obstacles is available in electronic form, and a Reference to GEN 3.1.6						
331.	2.10.3	NIL indication, if appropriate						
332.	2.11	Meteorological Information Provided						
333.	2.11.1	Name of the associated meteorological office;						
334.	2.11.2	Hours of service and, where applicable, the designation of the responsible meteorological office outside these hours						
335.	2.11.3	Office responsible for preparation of TAFs and periods of validity and interval of issuance of the forecasts						
336.	2.11.4	Availability of the trend forecasts for the aerodrome, and interval of issuance						
337.	2.11.5	Information on how briefing and/or consultation is provided						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
338.	2.11.6	Types of flight documentation supplied and language(s) used in flight documentation						
339.	2.11.7	Charts and other information displayed or available for briefing or consultation						
340.	2.11.8	Supplementary equipment available for providing information on meteorological conditions, e.g. weather radar and receiver for satellite images						
341.	2.11.9	The air traffic services unit(s) provided with meteorological information						
342.	2.11.10	Additional information (e.g. concerning any limitation of service, etc.)						
343.	2.12	Runway Physical Characteristics						
344.	2.12.1	Designations						
345.	2.12.2	True bearings to one-hundredth of a degree						
346.	2.12.3	Dimensions of runways to the nearest meter						
347.	2.12.4	Strength of pavement (PCN and associated data) and surface of each runway and associated stopways						
348.	2.12.5	Geographical coordinates in degrees, minutes, seconds and hundredths of seconds for each threshold and runway end						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
349.	2.12.5	Geographical coordinates in degrees, minutes, seconds and hundredths of seconds for each threshold and runway end						
350.	2.12.5	Geoid undulation to the nearest foot for each non-precision approach runway threshold						
351.	2.12.5	Geoid undulation to the nearest tenth of a foot for each precision approach runway threshold						
352.	2.12.6	Elevations of thresholds of a non-precision approach runway to the nearest foot						
353.	2.12.6	Elevations of thresholds and the highest elevation of the touchdown zone of a precision approach runway to the nearest tenth of a foot						
354.	2.12.7	Slope of each runway						
355.	2.12.7	Slope of each stopway						
356.	2.12.8	Dimensions of stopway (if any) to the nearest metre						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
357.	2.12.9	Dimensions of clearway (if any) to the nearest metre						
358.	2.12.10	Dimensions of strips to the nearest metre						
359.		Dimensions of RESAs to the nearest metre						
360.	2.12.11	The existence of an obstacle-free zone						
361.	Ann 14 2.5.1 j	Distances to the nearest metre of localizer and glide path elements comprising an instrument landing system (ILS) in relation to the associated runway extremities.						
362.	2.12.12	Remarks						
363.	2.13	<b>Declared Distances</b>						
364.	2.13.1	Runway designator						
365.	2.13.2	Take-off run available to the nearest metre						
366.	2.13.3	Take-off distance available to the nearest metre						
367.	2.13.4	Accelerate-stop distance available to the nearest metre						
368.	2.13.5	Landing distance available to the nearest metre						
369.	2.13.6	Remarks						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
370.	2.13.note	—Not usable statement, if applicable						
371.	2.14.	<b>Approach and Runway Lighting</b>						
372.	2.14.1	Runway designator						
373.	2.14.2	Type of approach lighting system						
374.	2.14.2	Length and intensity of approach lighting system						
375.	2.14.3	Runway threshold lights, colour and wing bars						
376.	2.14.4	Type of visual approach slope indicator system (PAPI)						
377.	2.14.4	PAPI MEHT, approach slope angle, distance from threshold, and side of runway						
378.	2.14.5	Length of runway touchdown zone lights						
379.	2.14.6	Length, spacing, colour and intensity of runway centre line lights						
380.	2.14.7	Length, spacing, colour and intensity of runway edge lights						
381.	2.14.8	Colour of runway end lights and wing bars						
382.	2.14.9	Length and colour of stopway lights						
383.	2.14.10	Remarks						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
384.	2.15	<b>Other Lighting, secondary power supply</b>						
385.	2.15.1	Location, characteristics and hours of operation of aerodrome beacon/identification beacon (if any)						
386.	2.15.2	Location and lighting (if any) of anemometer/landing direction indicator						
387.	2.15.3	Taxiway edge and taxiway centre line lights						
388.	2.15.4	Secondary power supply						
389.	2.15.4	Secondary power supply switch-over time						
390.	2.15.5	Remarks						
391.	2.16	<b>Helicopter Landing Area</b>						
392.	2.16.1	Geographical coordinates in degrees, minutes, seconds and hundredths of seconds of the geometric centre of touchdown and lift-off (TLOF) or of each threshold of final approach and take-off (FATO) area (where appropriate)						
393.	2.16.1	Geoid undulation of the geometric centre of touchdown and lift-off (TLOF) or of each threshold of final approach and take-off (FATO) area (where appropriate) for non-precision approaches to the nearest foot						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
394.	2.16.1	Geoid undulation of the geometric centre of touchdown and lift-off (TLOF) or of each threshold of final approach and take-off (FATO) area (where appropriate) for precision approaches to the nearest tenth of a foot						
395.	2.16.	TLOF and/or FATO area elevation for non-precision approaches to the nearest foot						
396.	2.16.	TLOF and/or FATO area elevation for precision approaches to the nearest tenth of a foot						
397.	2.16.	TLOF and FATO area dimensions to the nearest metre, surface type, bearing strength and marking;						
398.	2.16.	True bearings to one-hundredth of a degree of FATO						
399.	2.16.	Declared distances available, to the nearest metre						
400.	2.16.	Approach and FATO lighting						
401.	2.16.	Remarks						
402.	2.17	Air Traffic Services Airspace						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
403.	2.17.	Airspace designation and geographical coordinates in degrees, minutes and seconds of the lateral limits						
404.	2.17.	Vertical limits						
405.	2.17.	Airspace classification						
406.	2.17.	Call sign and language(s) of the ATS unit providing services						
407.	2.17.	Transition altitude						
408.	2.17.	Remarks						
409.	2.18	Air Traffic Services Communication						
410.	2.18.	services designation						
411.	2.18.	Call sign						
412.	2.18.	Channel(s);						
413.	2.18.	Logon address, as appropriate						
414.	2.18.	Hours of operation						
415.	2.18.	Remarks						
416.	2.19	Radio Navigation and Landing Aids						
417.	2.19.1	Appropriate, and type of supported operation for ILS/MLS, basic GNSS, SBAS, and GBAS and for VOR/ILS/MLS also station declination to the nearest degree used for technical line-up of the aid						
418.	2.19.2	Identification, if required						
419.	2.19.3	Frequency(ies), as appropriate						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
420.	2.19.4	Hours of operation, as appropriate						
421.	2.19.5	Geographical coordinates in degrees, minutes, seconds and tenths of seconds of the position of the transmitting antenna, as appropriate						
422.	2.19.6	Elevation of the transmitting antenna of DME to the nearest 100 ft and of DME/P to the nearest 10 ft						
423.	2.19.7	Remarks (en-route and aerodrome aid the same: description in section ENR 4. Operating PACA of the facility if other than the designated governmental agency. Facility coverage)						
424.	2.20	<b>Local Traffic Regulations</b>						
425.	2.20	Standard routes for taxiing aircraft						
426.	2.20	Parking Regulations						
427.	2.20	Training flights						
428.	2.20	Other						
429.	2.21	<b>Noise Abatement Procedures</b>						
430.	2.21	Detailed description of noise abatement procedures						
431.	2.22	<b>Flight Procedures</b>						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
432.	2.22.	Runway(s) and associated equipment authorised for use under low visibility procedures						
433.	2.22.	Defined meteorological conditions under which initiation, use and termination of low visibility procedures would be made						
434.	2.22.	Description of ground marking/lighting for use under low visibility procedures						
435.	2.23	<b>Additional Information</b>						
436.	2.23	Bird concentrations						
437.	2.23	Other						
438.	2.24	<b>Charts Related to the Aerodrome</b>						
439.	2.24	List of charts						
440.	2.24.	Aerodrome/Heliport Chart — ICAO						
441.	2.24.	Aircraft Parking/Docking Chart — ICAO						
442.	2.24.	Aerodrome Ground Movement Chart — ICAO						
443.	2.24.	Aerodrome Obstacle Chart — ICAO Type A (for each runway);						
444.	2.24.	Aerodrome Obstacle Chart — ICAO Type B						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
445.	2.24.	Precision Approach Terrain Chart — ICAO (precision approach Cat II and III runways)						
446.	2.24.	Area Chart — ICAO (departure and transit routes);						
447.	2.24.	Standard Departure Chart — Instrument — ICAO						
448.	2.24.	Area Chart — ICAO (arrival and transit routes);						
449.	2.24.	Standard Arrival Chart — Instrument — ICAO;						
450.	2.24.	ATC Surveillance Minimum Altitude Chart — ICAO						
451.	2.24.	Instrument Approach Chart — ICAO (for each runway and procedure type)						
452.	2.24.	Instrument Approach Chart — ICAO (for each runway and procedure type)						
453.	2.24.	Visual Approach Chart — ICAO						
454.	2.24.	Bird concentrations in the vicinity of the aerodrome						
455.	AD3	<b>Heliports</b> Referenceer to PACA (Annex 15 App 1 - AD 3)						
456.	App 4	<b>AIRAC</b> used when appropriate						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
457.	2.1.1, App 5	<b>Aeronautical Data (Ann 14 ch 2)</b> aeronautical data accuracy, integrity, quality system procedures						
458.	2.1.2	Aeronautical data integrity: survey - No.						
459.	2.1.3-4	Cyclic redundancy check (CRC)						
460.	2.1.5	World Geodetic System — 1984 (WGS-84)						
461.	2.1.5	WGS-84 identify transformed data						
462.	2.1.6 App 5	Accuracy of the field work						
463.	2.1.7	Determination of geoid undulation						
464.	2.3.1	Aerodrome elevation & geoid undulation measured to accuracy of nearest one-half foot						
465.	2.3.2	Non-precision approach runways: elevation and geoid undulation of each threshold measured to accuracy of nearest one-half foot						
466.	2.3.2	Non-precision approach runways: elevation of the runway end measured to accuracy of nearest one-half foot						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
467.	2.3.2	Non-precision approach runways: significant high and low intermediate points measured to accuracy of nearest one-half foot						
468.	2.3.3	Precision approach runways: elevation and geoid undulation of each threshold measured to accuracy of nearest one-quarter foot						
469.	2.3.3	Precision approach runways: elevation of the runway end measured to accuracy of nearest one-quarter foot						
470.	2.3.3	Precision approach runways: significant high and low intermediate points measured to accuracy of nearest one- quarter foot						
471.	2.4.2	Determination of aerodrome Reference temperature						
472.	Ann 15 10.5.3,	Metadata collection: survey to aerodrome operator to PACA						
473.	Ann 14 v1 2.9	Condition of the movement area and related facilities						
474.	2.9.3	Aerodrome inspections: surface, lighting, strips, obstacles; day, night; frequency						
475.	2.10	Disabled aircraft removal						
476.	2.11	Rescue and firefighting, incl RFFS						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
477.	2.11.3	Notification of changes in RFFS Cat						
478.	2.12	Visual approach slope indicator systems (PAPI)						
479.	2.13.1-4	Coordination between AIS, PACA and aerodrome operator						
480.	2.13.1	Certification status of aerodrome, date, validity, remarks						
481.	2.9	<b>Aerodrome Data (Ann 14) Condition of the Movement Area &amp; Related Facilities</b>						
482.	2.9.1	Provision of Information on condition of movement area to AIS via PACA						
483.	2.9.1	Provision of Information on condition of movement area to ATS unit						
484.	2.9.2	Monitoring of condition of movement area						
485.	2.9.3	Inspections of the movement area						
486.	2.9.4	Inspection and reporting of water on the runway						
487.	2.9.5-7	Reporting that a runway or portion thereof may be slippery when wet						
488.	2.9.8	Additional measurements when slippery in unusual conditions						
489.	2.9.9-2.9.11	Snow, slush, ice and sand						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
490.	2.10	<b>Disabled Aircraft Removal Information</b>						
491.	2.11	<b>Rescue and Fire Fighting Information</b>						
492.	2.12	<b>Visual Approach Slope Indicator</b>						
493.	2.13	<b>Coordination between AIS &amp; Aerodrome Operator</b>						
494.	3.	<b>CHAPTER 3: Physical characteristics</b>						
495.	3.1	Runways: number and orientation						
496.	3.1.2	Runways: siting and orientation for noise						
497.	3.1.3-4	Runways: maximum permissible crosswind						
498.	3.1.5	Runways: location of threshold						
499.	3.1.6	Runways: RESA & graded area before threshold						
500.	3.1.7	Runways: Length of primary runway						
501.	3.1.8	Runways: Length of secondary runway						
502.	3.1.9	Runways: Length of runway with stopway and/or clearway						
503.	3.1.10	Runways width						
504.	3.1.11-12	Runways: minimum distance between parallel runways for simultaneous ops						
505.	3.1.13-14	Runways longitudinal slope						
506.	3.1.15-16	Runways longitudinal slope changes						
507.	3.1.17	Runways sight distance						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
508.	3.1.18	Runways distance between slope changes						
509.	3.1.19-20	Runways: transverse slopes						
510.	3.1.21	Runways: strength						
511.	3.1.22	Runways: surface irregularities						
512.	3.1.23	Runways: surface friction						
513.	3.1.24	Runway surface friction measuring device						
514.	3.1.25	Runways: average surface texture depth						
515.	3.1.26	Runways: grooved or scored						
516.	3.2.1-2	Runway shoulders						
517.	3.2.3	Runway shoulders width						
518.	3.2.4	Runway shoulders slope						
519.	3.2.5	Runway shoulders strength						
520.	3.3.1-2	Runway Turn Pads provision						
521.	3.3.3	Runway Turn Pads: left side Reference						
522.	3.3.4	Runway Turn Pads: intersection angle not exceed 30 degrees						
523.	3.3.5	Runway Turn Pads: nose wheel angle not exceed 45 degrees						
524.	3.3.6	Runway Turn Pads: wheel clearance						
525.	3.3.7	Runway Turn Pads: increased wheel clearance in severe weather; eg sandstorm						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
526.	3.3.8	Runway Turn Pads: slopes						
527.	3.3.9	Runway Turn Pads: strength						
528.	3.3.10-11	Runway Turn Pads: surface irregularities and friction						
529.	3.3.12-13 Doc 9157-1,	Runway Turn Pads: shoulders & their strength						
530.	3.4.1	Runway strips provision						
531.	3.4.2	Runway strips length						
532.	3.4.3-5	Runway strips width						
533.	3.4.6-7, 9.9	Runway strips objects						
534.	3.4.8-9	Runway graded portion of strips provision						
535.	3.4.10	Runway graded portion of strips: flush with runway						
536.	3.4.11	Runway graded portion of strips: blast protection						
537.	3.4.12-13	Runway graded portion of strips: longitudinal slopes & slope changes						
538.	3.4.14-15	Runway graded portion of strips: transverse slopes						
539.	3.4.16-17	Runway graded portion of strips: strength						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
540.	3.5.1	Runway end safety areas provision						
541.	3.5.2-3	Runway end safety areas: length						
542.	3.5.4-5	Runway end safety areas: width						
543.	3.5.6	Runway end safety areas: objects						
544.	3.5.7	Runway end safety areas: graded area						
545.	3.5.8	Runway end safety areas non-penetration of approach and take-off climb area						
546.	3.5.9	Runway end safety areas longitudinal slopes						
547.	3.5.10	Runway end safety areas transverse slopes						
548.	3.5.11	Runway end safety areas reduce risk of damage to aircraft						
549.	3.5.11	Runway end safety areas enhance aeroplane deceleration						
550.	3.5.11	Runway end safety areas facilitate movement of RFFS vehicles						
551.	3.6.1	Clearways: provision and origin						
552.	3.6.2	Clearways: maximum length						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
553.	3.6.3	Clearways: width						
554.	3.6.4-5	Clearways: ground slope						
555.	3.6.6	Clearways: objects						
556.	3.7	Stopways: provision						
557.	3.7.1	Stopways: width						
558.	3.7.2	Stopways: slopes						
559.	3.7.3 Att A-2	Stopways; strength						
560.	3.7.4	Stopways: surface						
561.	3.7.5	Stopways: friction						
562.	3.8.1	Radio altimeter operating area: provision (precision)						
563.	3.8.2	Radio altimeter operating area: length						
564.	3.8.3	Radio altimeter operating area: width						
565.	3.8.4	Radio altimeter operating area: longitudinal slope changes						
566.	3.9.1-2	Taxiways: provision						
567.	3.9.3-4	Taxiways: design for cockpit over centreline & wheel clearance						
568.	3.9.5	Taxiways: width						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
569.	3.9.6	Taxiways curves						
570.	3.9.7	Taxiways junctions and intersections: fillets						
571.	3.9.8 table 3-1	Taxiways minimum separation distances;						
572.	3.9.9	Taxiways: longitudinal slopes						
573.	3.9.10	Taxiways: longitudinal slope changes						
574.	3.9.11	Taxiways: sight distance						
575.	3.9.12	Taxiways: transverse slopes						
576.	3.9.13	Taxiways: strength						
577.	3.9.14	Taxiways: surface						
578.	3.9.15	Taxiways: surface friction						
579.	3.9.16	Rapid Exit Taxiways turn off curve						
580.	3.9.17	Rapid Exit Taxiways inside radius fillet						
581.	3.9.18	Rapid Exit Taxiways straight distance						
582.	3.9.19	Rapid Exit Taxiways intersection angle						
583.	3.9.20-22	Taxiways on bridges						
584.	3.10.1-2	Taxiway shoulders						
585.	3.11.1	Taxiway strips provision						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
586.	3.11.2	Taxiway strips: width						
587.	3.11.3	Taxiway strips: objects						
588.	3.11.4	Taxiway strips: grading						
589.	3.11.5-6	Taxiway strips: slopes						
590.	3.12.1	Holding bays provision						
591.	3.12.2	Runway-holding positions: twy/rwy						
592.	3.12.2	Runway-holding positions: rwy/rwy						
593.	3.12.3	Runway-holding positions: OLS						
594.	3.12.3	Runway-holding positions: Navaid areas						
595.	3.12.4	Intermediate holding positions						
596.	3.12.5	Road-holding positions: RFFS access						
597.	3.12.5	Road-holding positions: road/twy in LVPs						
598.	3.12.5	Road-holding positions: No.vice roads						
599.	3.12.6 Table 3-2	Holding bay, Runway-holding positions, Intermediate holding positions, Road-holding positions: Location						
600.	3.13.1	Aprons: provision						
601.	3.13.2	Aprons: size						
602.	3.13.3	Aprons: strength						
603.	3.13.4-5	Aprons: slopes						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
604.	3.13.6	Aprons: clearance distance on aircraft stands						
605.	3.13.6 note	Aprons: provision of service roads						
606.	3.13.6 note	Aprons: provision of storage areas for ground equipment						
607.	3.14.1	Isolated aircraft parking position: designation						
608.	3.14.2	Isolated aircraft parking position: location						
609.	3.15	De-icing/anti-icing facilities						
610.	4	<b>CHAPTER 4 Obstacle restriction and removal</b>						
611.	4.1/4.2 Doc 9137-6, 1.2.2.5; Doc 8168-2	Obstacle limitation surfaces: outer horizontal surface						
612.	4.1.1-3/4.2	Conical surfaces						
613.	4.1.4-6/4.2 Doc 9137 part 6, 1.2	Inner horizontal surfaces						
614.	4.1.7-10/4.2	Approach surface RWY _ _						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
615.	4.1.7-10/4.2	Approach surface RWY _ _						
616.	4.1.11-12/4.2	Inner approach surfaces						
617.	4.1.13-16/4.2	Transitional surfaces						
618.	4.1.17-20/4.2	Inner transitional surfaces						
619.	4.1.21-24/4.2	Balked landing surfaces						
620.	4.1.25-29/4.2	Take-off climb surface RWY _ _						
621.	4.1.25-29/4.2	Take-off climb surface RWY _ _						
622.	Ann 4	Type A chart and surface						
623.	Ann 4	Type B chart and surface						
624.	5.3.5.41-45	PAPI obstacle protection surface RWY _						
625.	5.3.5.41-45	PAPI obstacle protection surface RWY _						
626.	Att A11	Approach light plane RWY _ _						
627.	Att A11	Approach light plane RWY _ _						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
628.	4.3	Objects outside the obstacle limitation surfaces						
629.	4.4	Other objects						
630.	Ann 15 ch10	Obstacle survey: WGS84: area 2a to 2d						
631.	Ann 15 ch10	Aerodrome & obstacle survey: WGS84: area 3						
632.	Ann 15 ch10	Aerodrome & obstacle survey: WGS84: area 4						
633.	5	<b>CHAPTER 5: Visual aids for navigation</b>						
634.	5.1	Indicators and signalling devices						
635.	5.1.1	Wind direction indicators: for runway						
636.	5.1.1	Wind direction indicators: for runway _						
637.	Vol 2, 5.1.1	Wind direction indicators: for helipads/stands						
638.	5.1.1.2	Wind direction indicators: visible from flight						
639.	5.1.1.2	Wind direction indicators: free from air disturbance						
640.	5.1.1.3	Wind direction indicators: dimensions						
641.	5.1.1.	Wind direction indicators: illumination						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
642.	5.1.1.	Wind direction indicators: white circular band						
643.	5.1.2	Landing direction indicators						
644.	5.1.3.1	Signalling lamp: provision						
645.	5.1.3.2	Signalling lamp: red, green & white						
646.	5.1.3.2	Signalling lamp: manual aiming						
647.	5.1.3.2	Signalling lamp: signalling						
648.	5.1.3.3	Signalling lamp: spread & intensity						
649.	5.1.4	Signal panels and signal area						
650.	5.2	<b>Markings</b>						
651.	5.2.1.-3	Runway markings: Interruption where more than 1 runway						
652.	5.2.1.4	Runway markings colour & conspicuity						
653.	5.2.1.4note	Markings: edge outlining if required						
654.	5.2.1.4note 10.4.2	Markings: friction						
655.	5.2.1.5	Taxiway etc markings colour & conspicuity						
656.	5.2.1.6	Apron safety lines colour & conspicuity						
657.	5.2.1.7	Night conspicuity						
658.	5.2.1.10	Unpaved taxiway markings						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
659.	5.2.2.1-6	Runway designation marking RWY __						
660.	5.2.2.1-6	Runway designation marking RWY __						
661.	Fig 5-2/3	Runway designation marking						
662.	5.2.3.1	Runway centre line marking provision						
663.	5.2.3.2	Runway centre line marking location/interruption						
664.	5.2.3.3-4	Runway centre line marking spacing & dimensions						
665.	5.2.1.4	Runway centre line marking: Maintenance and contingency regarding rubber contamination						
666.	5.2.4.1-3	Threshold marking RWY __						
667.	5.2.4.1-3	Threshold marking RWY __						
668.	5.2.4.4	Threshold marking location: RWY __						
669.	5.2.4.4	Threshold marking location: RWY __						
670.	5.2.4.5-6	Threshold marking pattern & dimensions RWY __						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
671.	5.2.4.5-6	Threshold marking pattern & dimensions RWY __						
672.	5.2.4.7-8	Threshold marking transverse stripe RWY __						
673.	5.2.4.7-8	Threshold marking transverse stripe RWY __						
674.	5.2.4.9-10	Displaced threshold marking						
675.	5.2.5.1-3	Aiming point marking RWY __: provision						
676.	5.2.5.1-3	Aiming point marking RWY __: provision						
677.	5.2.5.4	Aiming point marking RWY __: location including correlation with PAPIs						
678.	5.2.5.4	Aiming point marking RWY __: location including correlation with PAPIs						
679.	5.2.5.5	Aiming point marking RWY __: dimensions						
680.	5.2.5.5	Aiming point marking RWY __: dimensions						
681.	5.2.6.1-2	Touchdown zone marking RWY __: provision						
682.	5.2.6.1-2	Touchdown zone marking RWY __: provision						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
683.	5.2.6.3-5	Touchdown zone marking RWY_ _ : location & characteristics						
684.	5.2.6.3-5	Touchdown zone marking RWY_ _ : location & characteristics						
685.	5.2.7.1-2	Runway side stripe marking: provision						
686.	5.2.7.3-5	Runway side stripe marking: location & characteristics						
687.	5.2.8.1-3	Taxiway centre line marking: provision						
688.	5.2.8.4-5 5.2.8.9, 11	Enhanced Taxiway centre line marking						
689.	5.2.8.6-8	Taxiway centre line marking: location (on centreline on straight)						
690.	5.2.8.10 5.2.1.7	Taxiway centre line marking: Characteristics						
691.	5.2.9	Runway turn pad marking end of RWY						
692.	5.2.9	Runway turn pad marking end of RWY						
693.	5.2.10.1	Runway-holding position markings: provision						
694.	5.2.10.2-4	Runway-holding position markings: characteristics (A & B)						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
695.	5.2.10.5	Runway-holding position markings: increased conspicuity						
696.	5.2.10.5	Runway-holding position markings: conspicuity across full pavement width						
697.	5.2.10.6	Runway-holding position markings >60m: characteristics (B)						
698.	5.2.10.7	Runway-holding position markings: perpendicular to taxiway/visibility of rwy & approach path						
699.	5.2.11.1	Intermediate holding position markings: provision						
700.	5.2.11.3	Intermediate holding position markings: location						
701.	5.2.11.2/4	Intermediate holding position markings: de-icing						
702.	5.2.11.5	Intermediate holding position markings: characteristics						
703.	5.2.12.1-2	VOR aerodrome check-point marking: provision						
704.	5.2.12.3	VOR aerodrome check-point marking: location						
705.	5.2.12.4-6	VOR aerodrome check-point marking: characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
706.	5.2.13.1	Aircraft stand markings: provision						
707.	5.2.13.2	Aircraft stand markings: location						
708.	5.2.13.3-12	Aircraft stand markings: characteristics						
709.	5.2.13.	Aircraft stand markings: conspicuity and contrast edging						
710.	5.2.14.1	Apron safety lines: provision						
711.	5.2.14.2	Apron safety lines: location						
712.	5.2.14.3-4	Apron safety lines: characteristics						
713.	5.2.15.1	Road-holding position marking: provision						
714.	5.2.15.2	Road-holding position marking: location						
715.	5.2.15.3	Road-holding position marking: characteristics						
716.	5.2.16.1-2	Mandatory instruction marking: provision						
717.	5.2.16.3-5	Mandatory instruction marking: location						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
718.	5.2.16.6-10	Mandatory instruction marking: characteristics						
719.	5.2.17.1-4	Information marking: provision						
720.	5.2.17.5	Information marking: location						
721.	5.2.17.6-8	Information marking: characteristics						
722.	5.3	<b>5.3 Lights</b>						
723.	5.3.1.1	Lights which may endanger the safety of aircraft						
724.	5.3.1.2	Laser beam protected zones						
725.	5.3.1.3	Lights which may cause confusion (incl. to mariners)						
726.	5.3.1.7	Elevated edge lights						
727.	5.3.1.8-9	Surface inset lights						
728.	5.3.1.10-13	AGL intensity and control						
729.	5.3.2.1-3	Emergency lighting						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
730.	5.3.3.1-2	Aeronautical beacon						
731.	5.3.3.8-14	Identification beacon						
732.	5.3.1.4-6	Frangibility of approach lights						
733.	5.3.4.1	Approach lighting systems provision & type RWY _ _						
734.	5.3.4.2-21	Approach lighting systems: location						
735.	5.3.4.2-21	Approach lighting systems: layout						
736.	5.3.4.2-21	Approach lighting systems: characteristics						
737.	5.3.4.22-29	Approach lighting systems cat 2/3: location						
738.	5.3.4.22-29	Approach lighting systems cat 2/3: layout						
739.	5.3.4.30-39	Approach lighting systems cat 2/3: characteristics						
740.	5.3.7.1-6	Runway Lead-in lighting systems						
741.	5.3.5.1-5	Visual approach slope indicator system provision (PAPI) RWY _ _						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
742.	5.3.5.6	Visual approach slope indicator system, (PAPI) provision for a temporarily displaced threshold						
743.	5.3.5.23-27	Visual approach slope indicator system, (PAPI): layout						
744.	5.3.5.28	Visual approach slope indicator system, (PAPI): siting						
745.	5.3.5.29-35	Visual approach slope indicator system, (PAPI): characteristics						
746.	5.3.5.36-40	Visual approach slope indicator system, (PAPI): approach slope						
747.	5.3.6.1-5	Circling guidance lights						
748.	5.3.8	Runway threshold identification lights: RWY _						
749.	5.3.8.1-4	Runway threshold identification lights: Application, Location & Characteristics						
750.	5.3.9.1-2	Runway edge lights: provision						
751.	5.3.9.3-6	Runway edge lights: location						
752.	5.3.9.7a	Runway edge lights: Pre-threshold Characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
753.	5.3.9.7b	Runway edge lights: Last 600m Characteristics yellow						
754.	5.3.9.8	Runway edge lights: azimuth Characteristics						
755.	5.3.9.8	Runway edge lights circling guidance if required						
756.	5.3.9.9	Runway edge lights: elevation and intensity						
757.	5.3.9.10	Runway edge lights: precision approach						
758.	5.3.1.6	Runway edge lights: height, marking and frangibility						
759.	5.3.10.1	Runway threshold, wing bar lights provision RWY _ _						
760.	5.3.10.2-5	Runway threshold and wing bar lights RWY _ _; gap or continuous; inset/elevated						
761.	5.3.10.6-7	Runway wing bar lights provision						
762.	5.3.10.8-11	Runway wing bar lights: Location & Characteristics						
763.	5.3.11.1	Runway end lights provision RWY _ _						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
764.	5.3.11.2-5	Runway end lights RWY __; location & characteristics; gap or continuous; inset/elevated						
765.	5.3.12.1-4	Runway centre line lights provision						
766.	5.3.12.5-6	Runway centre line lights: location						
767.	5.3.12.5-6	Runway centre line lights: location: displaced THR						
768.	5.3.12.7-8	Runway centre line lights: characteristics						
769.	5.3.13.1	Runway touchdown zone lights provision RWY __						
770.	5.3.13.2-6 10.4	Runway touchdown zone lights location & characteristics RWY _____						
771.	5.3.14	Simple touchdown zone lights						
772.	5.3.15.1-2	Rapid exit taxiway indicator lights: provision						
773.	5.3.15.3-4	Rapid exit taxiway indicator lights: location						
774.	5.3.15.5-7	Rapid exit taxiway indicator lights: characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
775.	5.3.16.1-3	Stopway lights RWY_						
776.	5.3.1.6-7	Stopway lights: marking and frangibility						
777.	5.3.17.1-5	Taxiway centre line lights: provision						
778.	5.3.17.6-10	Taxiway centre line lights: characteristics						
779.	5.3.17.11	Taxiway centre line lights: location on centreline						
780.	5.3.17.12-14	Taxiway centre line lights on taxiways: location						
781.	5.3.17.16 - 17	Taxiway centre line lights on rapid exit taxiways: location						
782.	5.3.17.17-18	Taxiway centre line lights on other taxiways: location						
783.	5.3.17.19	Taxiway centre line lights on runways: location						
784.	5.3.18.1-2	Taxiway edge lights: provision						
785.	5.3.18.3-6	Taxiway edge lights: location						
786.	5.3.18.7-8	Taxiway edge lights: characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
787.	5.3.1.6-7	Taxiway edge lights: height, marking and frangibility						
788.	5.3.19	Runway turn pad (centreline) lights RWY THR_						
789.	5.3.19	Runway turn pad (centreline) lights RWY THR_						
790.	5.3.20.1-4	Stop bars; and lead on taxiway centreline Lights Provisions						
791.	5.3.20.5	Stop bars; and lead on taxiway centreline Lights Location						
792.	5.3.20.6-13	Stop bars; and lead on taxiway centreline Lights characteristics						
793.	5.3.20 Note2	Stop bars; use at all times						
794.	5.3.20.7	Stop bars: elevated in shoulders						
795.	5.3.21.1-2 5.3.20.3	Intermediate holding position lights: provision (or stop bar)						
796.	5.3.21.3	Intermediate holding position lights: location (0.3m)						
797.	5.3.21.4	Intermediate holding position lights: characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
798.	5.3.22	De-icing/anti-icing facility exit lights						
799.	5.3.23.1-3	Runway guard lights: provision/A or B; (RVR<550 or heavy traffic &<1200m RVR)						
800.	5.3.23.4-5	Runway guard lights: location						
801.	5.3.23.6-18	Runway guard lights: characteristics						
802.	5.3.23.2 9.8.4	Runway guard lights full time use						
803.	5.3.24.1	Apron floodlighting: provision						
804.	5.3.24.2	Apron floodlighting: location						
805.	5.3.24.3-4	Apron floodlighting: characteristics						
806.	5.3.26.1-4	Advanced Visual docking guidance system: provision						
807.	5.3.26.5	Advanced visual docking guidance system: location						
808.	5.3.26.6-16	Advanced visual docking guidance system: characteristics						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
809.	5.3.27.1	Aircraft stand manoeuvring guidance lights: provision						
810.	5.3.27.2	Aircraft stand manoeuvring guidance lights: location						
811.	5.3.27.3-7	Aircraft stand manoeuvring guidance lights: characteristics: green centreline						
812.	5.3.28.1-2	Road-holding position light: provision (RVR<550)						
813.	5.3.28.3	Road-holding position light: location						
814.	5.3.28.4-7	Road-holding position light: characteristics						
815.	5.4	<b>5.4 Signs</b>						
816.	5.4.1 5.4.1.1	Signs general: provision						
817.	5.4.1.2	Variable message signs: provision						
818.	5.4.1.3	Signs general: frangibility, height, separation from acft						
819.	5.4.1.3-6	Signs general: characteristics, incl. colour						
820.	5.4.1.7	Signs general: illuminated						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
821.	Table 5-5	Signs general: location						
822.	5.4.1.8-11	Signs general: characteristics						
823.	5.4.2.1-6	Mandatory instruction signs: provision						
824.	5.4.2.7	Mandatory instruction No-Entry signs: provision						
825.	5.4.2.8-11	Mandatory instruction signs: location						
826.	5.4.2.12-18	Mandatory instruction signs: characteristics						
827.	5.4.2 5.4.1.7	Mandatory instruction signs: illumination						
828.	5.4.3.1-3	Information signs: provision						
829.	5.4.3.4	Information signs: runway vacated: provision& location where acft actually vacated						
830.	5.4.3.5	Information signs: intersection take-off: provision						
831.	5.4.3.6-13	Information signs: destination, direction, location: provision						
832.	5.4.3.14-24	Information signs: location						
833.	5.4.3.25-37	Information signs: characteristics& illuminated						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
834.	5.4.4	VOR aerodrome check-point sign						
835.	5.4.5. 5.4.5.1-5	Aerodrome identification sign: Provision, location, characteristics						
836.	5.4.6.1	Aircraft stand identification signs: provision						
837.	5.4.6.2	Aircraft stand identification signs: location						
838.	5.4.6.3	Aircraft stand identification signs: characteristics						
839.	5.4.7.1	Road-holding position sign: provision						
840.	5.4.7.2	Road-holding position sign: location						
841.	5.4.7.3-5	Road-holding position sign: characteristics						
842.	<b>5.5</b>	<b>5.5 Markers</b>						
843.	5.5.1	General & frangibility/delethalisation						
844.	5.5.2	Unpaved runway edge markers						
845.	5.5.3	Stopway edge markers						
846.	5.5.4	Edge markers for snow-covered runways						
847.	5.5.5	Taxiway edge markers						
848.	5.5.6	Taxiway centre line markers						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
849.	5.5.7	Unpaved taxiway edge markers						
850.	5.5.8	Boundary markers						
851.	<b>6</b>	<b>CHAPTER 6: Visual Aids for denoting obstacles</b>						
852.	6.1.1 6.1.1.4	Objects to be marked and/or lighted: First 3000m TOCS						
853.	6.1.1.5	Objects to be marked and/or lighted: adjacent to TOCS						
854.	6.1.1.6	Objects to be marked and/or lighted: approach/transitional						
855.	6.1.1.7	Objects to be marked and/or lighted: horizontal surfaces						
856.	6.1.1.8	Objects to be marked and/or lighted: OBS protection surface						
857.	6.1	Objects to be marked and/or lighted						
858.	<b>6.2</b>	<b>Marking and /or lighting of objects</b>						
859.	6.2.1	Marking of objects: in/near obstacle limitation surfaces						
860.	6.1.2.1	Marking of objects: hazards outside obstacle limitation surfaces						
861.	6.1.1	Lighting of objects: on movement area						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
862.	Table 6-1	Lighting of objects; characteristics, switching & control						
863.	6.2.1	Marking of airside vehicles						
864.	6.2.2.5-8 table 6-3	Lighting of airside vehicles: manoeuvring area use						
865.	6.1.1.1 table 6-3	Lighting of airside vehicles: apron only use						
866.	6.2.2.7 table 6-3	Lighting of airside vehicles: follow me						
867.	6.2.4	Wind turbines marking & lighting: provision						
868.	6.2.4.2	Wind turbines marking						
869.	6.2.4.3	Wind turbines lighting						
870.	7	<b>CHAPTER 7 Visual aids for denoting restricted use areas</b>						
871.	7.1.1-2	Closed RWY, TWY: provision						
872.	7.1.3	Closed RWY, TWY: location						
873.	7.1.4-7	Closed RWY, TWY: characteristics						
874.	7.1.5	Closed RWY: removal of markings						
875.	7.1.6	Closed RWY, TWY lighting non-op						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
876.	7.1.7	Closed RWY, TWY blocked lighting						
877.	7.2.1	Non-load bearing surfaces: provision						
878.	7.2.2	Non-load bearing surfaces: location						
879.	7.2.3	Non-load bearing surfaces: characteristics						
880.	7.3.1	Pre-threshold area: provision						
881.	7.3.2	Pre-threshold area: location						
882.	7.3.3	Pre-threshold area: characteristics						
883.	7.4.1	Un-serviceable areas: provision						
884.	7.4.2	Un-serviceable areas: location						
885.	7.4.3, (5-7)	Un-serviceable areas: characteristics: markers						
886.	7.4.4	Un- serviceable areas: characteristics: lights						
887.	<b>8.</b>	<b>CHAPTER 8: Electrical Systems</b>						
888.	8.1	Primary electrical power supply systems for air navigational facilities						
889.	8.1.1	Electrical power supply: adequate guidance after failure						
890.	8.15 table 8-1	Electrical power supply systems: switch-over time						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
891.	8.1.7	Electrical power supply systems: visual aids						
892.	8.2	Systems Design						
893.	8.3	Monitoring: provision						
894.	8.3.1-5	Monitoring: status indication 2-5 seconds						
895.	8.3.5	Monitoring: auto monitor, indication and relay						
896.	9.	<b>CHAPTER 9: Aerodrome operational services: Rescue and Fire Fighting</b>						
897.	9.1.1-6	Aerodrome emergency planning: see Emergency Plan in Aerodrome Manual section above						
898.	9.1.7-10	Aerodrome emergency planning: EOC provision						
899.	9.1.7 (b,c)	Aerodrome emergency planning: EOC location						
900.	9.1.7 (b)	Aerodrome emergency planning: EOC access						
901.	9.1.7 (c)	Aerodrome emergency planning: EOC visibility from						
902.	9.1.7 (d)	Aerodrome emergency planning: EOC Communication						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
903.	9.1.7 (e)	Aerodrome emergency planning: EOC manning						
904.	9.1.8	Aerodrome emergency planning: Mobile Command Post provision						
905.	9.1.8	Aerodrome emergency planning: MCP response						
906.	9.1.8 (b)	Aerodrome emergency planning: MCP Position & visibility from						
907.	9.1.8 (c)	Aerodrome emergency planning: MCP marking/lighting						
908.	9.1.8 (d)	Aerodrome emergency planning: MCP Communication						
909.	9.1.8 (e)	Aerodrome emergency planning: MCP manning						
910.	9.1.9	Aerodrome emergency planning: Communications system						
911.	9.1.10 9.1.111	Aerodrome emergency planning: Emergency exercise						
912.	9.2.1	RFF: provision						
913.	9.2.2	RFF specialist RFF for water/difficult terrain (soft sand, mountainous etc)						
914.	9.2.3	RFF: Level of protection						
915.	9.2.5-7 Table 9-1	RFF category provision: equal to aircraft category						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
916.	9.2.45	RFF number of vehicles provided						
917.	Doc9137 p1	RFF vehicles: characteristics						
918.	9.2.12	RFF category provision: larger aircraft within category						
919.	9.2.9, 9.2.11	RFF extinguishing agents, principal: quantity						
920.	9.2.15 Table 9-2	RFF extinguishing agents, 2 loads of foam solution on vehicles						
921.	9.2.18 Table 9-2	RFF extinguishing agents, principal: discharge rate						
922.	9.2.19-25 Table 9-2	RFF extinguishing agents, complimentary: quantity and compatibility						
923.	9.2.20 Table 9-2	RFF extinguishing agents, complimentary: discharge rate						
924.	9.2.16	RFF extinguishing agents: Supplementary water: source, supply & quantity						
925.	9.2.16	RFF extinguishing agents: Supplementary water: delivery rate						
926.	9.2.16	RFF extinguishing agents: Supplementary water: no. of vehicles						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
927.	9.2.22	RFF extinguishing agents: complimentary: reNo.ve supply 200% of vehicle foam & complimentary media; increased if delivery delays						
928.	9.2.26	RFF rescue equipment: overall list						
929.	9.2.27	RFF rescue equipment: carried on each vehicle						
930.	9.2.28	RFF rescue equipment: carried on non RFFS vehicles						
931.	9.2.29	RFF rescue equipment: available at scene (excluding vehicles that leave the scene for replenishment)						
932.	9.2.30	RFF response objective: operational runway						
933.	9.2.31	RFF response objective: rest of movement area						
934.	9.2.35	RFF response objective: procedures & records of tests						
935.	N\A	RFF response objective: in less than optimum conditions						
936.	9.2.33	RFF response objective: remaining vehicles and continuous application						
937.	9.2.34	RFF preventative maintenance						
938.	9.2.36	RFF emergency access roads: provision						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
939.	9.2.37	RFF emergency access roads: capability and surfacing close to runway						
940.	9.2.38	RFF emergency access roads: edge markers						
941.	9.2.39	RFFS station: main						
942.	9.2.39	RFFS station: satellite						
943.	9.2.40	RFFS station: direct, clear access to runway						
944.	9.2.41-42	RFF communications: ATS to RFF watchroom/station (s)						
945.	9.2.43	RFF communications: RFF station to RFF vehicles						
946.	9.2.42	RFF alerting system						
947.	9.2.44 & Att A, 18.5.1	RFF communications: intra RFFS						
948.	9.2.44 & Att A, 18.5.1	RFF communications with flight crew, e.g.121.6						
949.	9.2.46	RFF personnel training: live fire drills: type of aircraft & aerodrome RFF equipment						
950.	9.2.47	RFF personnel training: pressure fed fuel fires						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
951.	9.2.48	RFF personnel training: airport familiarization						
952.	9.2.49	RFF personnel training: aircraft familiarization: based & scheduled aircraft						
953.	9.2.50	RFF personnel training: aircraft familiarization: reasonably expected visiting aircraft						
954.	9.2.51	RFF personnel training: RFF personnel safety						
955.	9.2.52 & Att A, 18.5.1	RFF personnel training: emergency communications systems						
956.	9.2.53	RFF personnel training: RFF media delivery devices						
957.	9.2.53	RFF personnel training: application of RFF media						
958.	9.2.54	RFF personnel training: emergency aircraft evacuation assistance						
959.	9.2.52	RFF personnel training: fire fighting operations						
960.	9.2.55	RFF personnel training: adaptation & use of building RFF equipment for aircraft RFF						
961.	Att A 18.2 j	RFF personnel training: dangerous goods						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
962.	9.2.56 & Att A 18.2 K	RFF personnel training: RFF duties under aerodrome emergency plan						
963.	9.2.57 & Att A 18.2 L	RFF personnel training: protective clothing						
964.	9.2.58 & Att A 18.2 L	RFF personnel training: respiratory protection						
965.	9.2.59	RFF personnel training: human performance						
966.	9.2.60	RFF personnel training: team coordination						
967.	9.2.62	RFF sufficient personnel: number of						
968.	9.2.62 (a)	RFF sufficient personnel: operate equipment at max capacity						
969.	9.2.65 (b)	RFF sufficient personnel: trained						
970.	9.2.62 (c)	RFF sufficient personnel: achieve min response times						
971.	9.2.62 (d)	RFF sufficient personnel: continuous agent application						
972.	9.2.62 (e)	RFF sufficient personnel: hand lines						
973.	9.2.62 (f)	RFF sufficient personnel: ladders						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
974.	9.2.62 (g)	RFF sufficient personnel: RPE and entry control						
975.	9.2.62 (h)	RFF sufficient personnel: other RFF equipment						
976.	9.2.49	RFF sufficient personnel: as applicable to aircraft type						
977.	9.2.64	RFF protective clothing: All RFF staff						
978.	9.2.58	RFF RPE: All RFF staff						
979.	<b>9.3</b>	<b>Disabled aircraft removal</b>						
980.	9.3.2 (b)	Disabled aircraft removal equipment & personnel on site						
981.	9.3.2 (c)	Disabled aircraft removal equipment & personnel off site						
982.	9.4.1 b	Wildlife strike hazard assessment: information collection						
983.	9.4.1 c	Wildlife strike hazard reduction: evaluation by competent personnel						
984.	9.4.2	Wildlife strike hazard reduction: forwarding data to PACA						
985.	9.4.3	Wildlife strike hazard reduction: action to minimize likelihood of wildlife/aircraft collisions						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
986.	9.4.3	Wildlife strike hazard suitable equipment						
987.	9.4.6	Wildlife strike hazard training						
988.	9.4.5	Wildlife strike hazard reduction: liaison around aerodrome vicinity & developments						
989.	9.5.1	Apron Management Service: provision						
990.	9.5.2	Apron Management Service: transition procedures to/from ATC						
991.	9.5.3	Apron Management Service: communications						
992.	9.5.4	Apron Management Service: restriction of vehicles in LVPs						
993.	9.5.5-6	Apron Management Service: vehicle priorities						
994.	9.5.7	Apron Management Service: visual monitoring of aircraft stands						
995.	9.6.1	Ground Service of aircraft: fire extinguisher provision						
996.	9.6.1	Ground Service of aircraft: fire extinguisher competence of personnel						
997.	9.6.1	Ground Service of aircraft: RFF alerting						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
998.	9.6.2	Reference refueling with passengers on board						
999.	9.7.1	Aerodrome vehicle operations: authorised vehicles only						
1000.	9.7.2-3	Aerodrome vehicle operations: compliance with instructions/markings/lights						
1001.	9.7.4	Aerodrome vehicle operations: drivers trained						
1002.	9.7.5	Aerodrome vehicle operations: all drivers RT on manoeuvring area						
1003.	9.8.1	Surface movement guidance and control systems: provision						
1004.	9.8.2	Surface movement guidance and control systems: design						
1005.	9.8.3	Surface movement guidance and control systems: markings						
1006.	9.8.3	Surface movement guidance and control systems: lights						
1007.	9.8.3	Surface movement guidance and control systems: signs						
1008.	9.8.4	Surface movement guidance and control systems: assist in prevention of runway incursions						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1009.	9.8.5	Surface movement guidance and control systems: assist in prevention of collisions						
1010.	9.8.6	Surface movement guidance and control systems: selective switching						
1011.	9.8.7-8	Surface movement guidance and control systems: surface movement radar						
1012.	9.9.1	Siting of equipment and installations on operational areas: only necessary, permitted obstacles						
1013.	9.9.2 -4,6	Siting of equipment and installations on operational areas: frangibility						
1014.	9.9.6	Siting of equipment and installations on operational areas: as low as possible						
1015.	9.9.2 Table 3-1	Siting of equipment and installations on operational areas: distance from runway						
1016.	9.9 6.1	Siting of equipment and installations on operational areas: marking						
1017.	9.9 6.1	Siting of equipment and installations on operational areas: lighting						
1018.	Att A, 9.2	Delethalisation of objects in strips & RESAs						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1019.	9.10.1	Fencing: provision						
1020.	9.10.1	Fencing: prevention of animal access						
1021.	9.10.2	Fencing: deterrence of inadvertent access						
1022.	9.10.2	Fencing: deterrence of unauthorised persons						
1023.	9.10.2 Note 1	Fencing: barring of sewers, ducts, tunnels etc.						
1024.	9.10.3	Fencing: deterrence of access to ground installations essential for safety of aviation						
1025.	9.10.4	Fencing: location: separation of movement area						
1026.	9.10.5	Fencing: cleared area: 3m both sides						
1027.	9.10.6	Fencing: airside perimeter road						
1028.	9.11	Security lighting						
1029.	10	<b>CHAPTER 10 Aerodrome Maintenance</b>						
1030.	10.1.1	General: maintenance programme						
1031.	10.1.2	General: human factors						
1032.	10.2.1	Pavements& adjacent areas: kept clear of stones etc						
1033.	Att A 9.1	Pavements: shoulders						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1034.	10.2.2	Pavements: prevention of harmful irregularities						
1035.	10.2.3	Pavements: friction measurement: equipment						
1036.	10.2.4	Pavements: friction measurement: last report						
1037.	2.9.6	Pavements: friction measurement: slippery when wet NOTAM						
1038.	10.2.5	Pavements: friction measurement: slippery when wet: corrective action						
1039.	10.2.6	Pavements: friction measurement: poor drainage assessment						
1040.	10.2.7	Pavements: jet taxiway shoulders clear of stones etc.						
1041.	10.3.1	Pavements: removal of rubber etc. deposits& contaminants						
1042.	10.3.2	Pavements: taxiways clear of sand etc.						
1043.	10.3.3	Pavements: aprons clear of sand etc.						
1044.	10.4	Runway pavement overlays						
1045.	10.5.1	Visual aids: light intensity measurement						
1046.	10.5.2	Visual aids: preventative maintenance: AGL						

No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1047.	10.5.2	Visual aids: preventative maintenance: markings: runway centreline						
1048.	10.5.2	Visual aids: preventative maintenance: other markings						
1049.	10.5.3	AGL preventative maintenance cat 2/3						
1050.	10.5.7	AGL: stop bar preventative maintenance						
1051.	10.5.8	AGL: taxiway preventative maintenance						
1052.	10.5.9 (a)	AGL: preventative maintenance cat 1: approach lights						
1053.	10.5.9 (b)	AGL: preventative maintenance cat 1: runway threshold lights						
1054.	10.5.9 (c)	AGL: preventative maintenance cat 1: runway edge lights						
1055.	10.5.9 (d)	AGL: preventative maintenance cat 1: runway end lights						
1056.	10.5.9 (e)	AGL: preventative maintenance cat 1: runway centreline lights, if provided						
1057.	10.5.9 (f)	AGL: preventative maintenance cat 1: touchdown zone lights, if provided						
1058.	10.5.9 (g)	AGL: preventative maintenance cat 1: stopbar lights, if provided						



No.	Ref	Topic	Manual reference	Aerodrome Operator comments	Aerodrome Operator self-assessment	Audited by	PACA Comments	Compliance
1059.	10.5.10	AGL: preventative maintenance runway lights for take-off <550m RVR						
1060.	10.5.11	AGL: preventative maintenance runway lights for take-off $\geq$ 550m RVR						
1061.	10.5.12	LVPs: restriction of maintenance activities						

**END OF CHCKLIST**

**Note 1:** Decode for entries in final column:

Complies with CAR139 (as applicable)	Complies
Compliant: the aerodrome's standard exceeds ICAO Annex 14/CAR139	Exceeds
The aerodrome's standard is different in character from ICAO Annex 14/CAR139, and cannot be determined to be either compliant or none compliant	Different
Not compliant: the audit found the aerodrome's standard on this issue to not comply with ICAO Annex 14 and CAR139	less
Not compliant: the audit found the aerodrome's standard on the day of audit to be none compliant with the aerodrome manual, even though compliant with ICAO Annex 14 and CAR139.	shortfall
Not applicable	N/A

**ATTACHMENT E. BIRD STRIKE REPORTING FORM**

Send to: Directorate General for Civil Aviation Regulation

Operator.....	Effect on Flight			
Aircraft Make/Model.....	none		<input type="checkbox"/>	
Engine Make/Model.....	aborted take-off		<input type="checkbox"/>	
Aircraft Registration.....	precautionary landing		<input type="checkbox"/>	
Date..... Day ..... Month ..... Year .....	engines shut down		<input type="checkbox"/>	
Local Time	other (specify)		<input type="checkbox"/>	
dawn <input type="checkbox"/> Day <input type="checkbox"/> Dusk <input type="checkbox"/> night <input type="checkbox"/>	Sky Condition			
Aerodrome Name.....	no cloud		<input type="checkbox"/>	
Runway Used.....	some cloud		<input type="checkbox"/>	
Location if En Route.....	overcast		<input type="checkbox"/>	
Height AGL..... Ft	Precipitation			
Speed (IAS)..... Kt	fog		<input type="checkbox"/>	
Phase of Flight	rain		<input type="checkbox"/>	
Parked <input type="checkbox"/> en route <input type="checkbox"/>	snow		<input type="checkbox"/>	
Taxi <input type="checkbox"/> descent <input type="checkbox"/>	Bird Species *			
Take-off run <input type="checkbox"/> approach <input type="checkbox"/>	Number of Birds			
Climb <input type="checkbox"/> landing roll <input type="checkbox"/>				
Part(s) of Aircraft		Seen		Struck
		1	<input type="checkbox"/>	<input type="checkbox"/>
		2-10	<input type="checkbox"/>	<input type="checkbox"/>
		11-100	<input type="checkbox"/>	<input type="checkbox"/>
		more	<input type="checkbox"/>	<input type="checkbox"/>
radome <input type="checkbox"/> Struck Damaged <input type="checkbox"/>	Size of Birds			
windshield <input type="checkbox"/>	Small		<input type="checkbox"/>	
nose (excluding above) <input type="checkbox"/>	Medium		<input type="checkbox"/>	
engine no. 1 <input type="checkbox"/>	Large		<input type="checkbox"/>	
2 <input type="checkbox"/>	Pilot Warned of Birds			
3 <input type="checkbox"/>	yes		<input type="checkbox"/>	no <input type="checkbox"/>
4 <input type="checkbox"/>	Remarks (Describe damage, injuries and other pertinent information)			
propeller <input type="checkbox"/>				
wing/rotor <input type="checkbox"/>				
fuselage <input type="checkbox"/>				
landing gear <input type="checkbox"/>				
tail <input type="checkbox"/>				
lights <input type="checkbox"/>				
other (specify) <input type="checkbox"/>				

Reported by .....

\*send all bird remains including leather fragments to:

(Optional)

**THIS INFORMATION IS REQUIRED FOR AVIATION SAFETY**

**END OF DOCUMENT**